EMC TEST REPORT

No. ETA25060001S-002

Applicant	:	Hangzhou Longlux Electronic Technology Co., ltd The Western Science Park, Hangzhou City, China
Manufacturer	:	Hangzhou Longlux Electronic Technology Co., ltd The Western Science Park, Hangzhou City, China
Equipment	:	LED Panel Lights with SELV driver
Type/Model	:	See model list

SUMMARY

The equipment comply with the requirements according to the following standards:

EN IEC 55015:2019+A11:2020: Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

EN IEC 61547:2023: Equipment for general lighting purposed EMC immunity requirements

EN IEC 61000-3-2:2019+A1:2021: Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions (equipment input current ≤ 16A per phase)

EN 61000-3-3:2013+A1:2019+A2:2021: Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16A per phase and not subject to conditional connection

Date of issue: July 14, 2025

Prepared by: Approved by:





Danny Zhou (*Project engineer*) Sean Wan (*Reviewer*)

Contents

SUMMARY 1

1. GENERAL INFORMATION 5

1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) 5
1.2 DESCRIPTION OF TEST FACILITY 9

2. TEST SPECIFICATIONS 10

2.1 STANDARDS 10
2.2 MODE OF OPERATION DURING THE TEST 10
2.2.1 Description of operation 10
2.2.2 Test Peripherals 10
2.3 TEST SUMMARY 11

EMISSION TEST 12

3. MAINS/LOAD/CONTROL TERMINAL CONTINUOUS DISTURBANCE VOLTAGE 12

3.1 TERMINAL VOLTAGE LIMITS FOR THE FREQUENCY RANGE 9KHZ TO 30MHZ 12
3.1.1 Disturbance voltage limits at mains terminals 12
3.1.2 Disturbance voltage limits at load and control terminals 12
3.2 BLOCK DIAGRAM OF TEST SETUP 13
3.3 TEST SETUP AND TEST PROCEDURE 14
3.3.1 Test setup 14
3.3.2 Test procedure 14
3.4 TEST PROTOCOL 15
3.5 MEASUREMENT UNCERTAINTY 19
3.6 ADDITIONS, DEVIATIONS AND EXCLUSIONS FROM STANDARDS 19

4. RADIATED ELECTROMAGNETIC DISTURBANCE 20

4.1 RADIATED ELECTROMAGNETIC DISTURBANCE LIMIT FOR FREQUENCY RANGE 9KHZ TO 30MHZ 20
4.2 BLOCK DIAGRAM OF TEST SETUP 20
4.3 TEST SETUP AND TEST PROCEDURE 20
4.4 TEST PROTOCOL 21
4.5 MEASUREMENT UNCERTAINTY 24
4.6 ADDITIONS, DEVIATIONS AND EXCLUSIONS FROM STANDARDS 24

5. INSERTION LOSS 25

5.1 INSERTION LOSS LIMIT 25
5.2 BLOCK DIAGRAM OF TEST SET UP 25
5.3 TEST PROCEDURE 28
5.4 TEST PROTOCOL 28
5.5 ADDITIONS, DEVIATIONS AND EXCLUSIONS FROM STANDARDS 28

6. RADIATED EMISSION/CONDUCTED RF EMISSION 29

6.1 LIMIT 29
6.2 BLOCK DIAGRAM AND TEST SET UP 30
6.3 TEST PROTOCOL 31
6.4 MEASUREMENT UNCERTAINTY 32
6.5 ADDITIONS, DEVIATIONS AND EXCLUSIONS FROM STANDARDS 32

7. HARMONICS 33

7.1 BLOCK DIAGRAM OF TEST SETUP 33
7.2 TEST SETUP AND TEST PROCEDURE 33
7.3 TEST PROTOCOL 33
7.4 MEASUREMENT UNCERTAINTY 35

8. VOLTAGE FLUCTUATIONS-FLICKER 36

8.1 BLOCK DIAGRAM OF TEST SETUP 36
8.2 TEST SETUP AND TEST PROCEDURE 36
8.2.1 Definition 36
8.2.2 Test condition 36
8.3 TEST PROTOCOL 37
8.4 MEASUREMENT UNCERTAINTY 37

IMMUNITY TEST 38

9. ELECTROSTATIC DISCHARGE (ESD) 39

9.1 SEVERITY LEVEL AND PERFORMANCE CRITERION 39
9.1.1 Test level 39
9.1.2 Performance Criterion 39
9.2 BLOCK DIAGRAM OF TEST SETUP 39
9.3 TEST SETUP AND TEST PROCEDURE 40
9.4 TEST PROTOCOL 40
9.5 MEASUREMENT UNCERTAINTY 41
9.6 ADDITIONS, DEVIATIONS AND EXCLUSIONS FROM STANDARDS 41

10. ELECTROMAGNETIC FIELD SUSCEPTIBILITY 42

10.1 SEVERITY LEVEL AND PERFORMANCE CRITERION 42
10.1.1 Test level 42
10.1.2 Performance Criterion 42
10.2 BLOCK DIAGRAM OF TEST SETUP 43
10.3 TEST SETUP AND TEST PROCEDURE 43
10.4 TEST PROTOCOL 44
10.5 MEASUREMENT UNCERTAINTY 44
10.6 ADDITIONS, DEVIATIONS AND EXCLUSIONS FROM STANDARDS 44

11. ELECTRIC FAST TRANSIENT/BURST IMMUNITY TEST 45

11.1 SEVERITY LEVEL AND PERFORMANCE CRITERION 45
11.1.1 Test level 45
11.1.2 Performance Criterion 45
11.2 BLOCK DIAGRAM OF TEST SETUP 46
11.2.1 Block Diagram for input a.c./d.c. power line 46
11.2.2 Block Diagram for output a.c./d.c. power line or signal/control lines 47
11.3 TEST SETUP AND TEST PROCEDURE 47
11.4 TEST PROTOCOL 48
11.5 MEASUREMENT UNCERTAINTY 48
11.6 ADDITIONS, DEVIATIONS AND EXCLUSIONS FROM STANDARDS 48

12. SURGE IMMUNITY TEST 49

12.1 SEVERITY LEVEL AND PERFORMANCE CRITERION 49
12.1.1 Test level 49
12.1.2 Performance Criterion 49
12.2 BLOCK DIAGRAM OF TEST SETUP 50
12.3 TEST SETUP AND TEST PROCEDURE 50
12.4 TEST PROTOCOL 51
12.5 MEASUREMENT UNCERTAINTY 51
12.6 ADDITIONS, DEVIATIONS AND EXCLUSIONS FROM STANDARDS 51

13. IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS 52

13.1 SEVERITY LEVEL AND PERFORMANCE CRITERION 52
13.1.1 Test level 52
13.1.2 Performance Criterion 52

13.2 BLOCK DIAGRAM OF TEST SETUP 52
13.3 TEST SETUP AND TEST PROCEDURE 53
13.4 TEST PROTOCOL 54
13.5 MEASUREMENT UNCERTAINTY 54
13.6 ADDITIONS, DEVIATIONS AND EXCLUSIONS FROM STANDARDS 54
14. VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY TEST 55
14.1 SEVERITY LEVEL AND PERFORMANCE CRITERION 55
14.1.1 Test level 55
14.1.2 Performance Criterion 55
14.2 BLOCK DIAGRAM OF TEST SETUP 56
14.3 TEST SETUP AND TEST PROCEDURE 56
14.4 TEST PROTOCOL 56
14.5 MEASUREMENT UNCERTAINTY 56
14.6 ADDITIONS, DEVIATIONS AND EXCLUSIONS FROM STANDARDS 56
APPENDIX I: PHOTOGRAPH 57

1. GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

EUT	:	LED Panel Lights with SELV driver
Description of EUT	:	The products covered in this report are LED Panel Lights with Independent SELV driver, Indoor used. All models share the same construction and LED chip, except for the dimension, LED driver, with or without CCT switch and electrical rating is different. Detail difference see model list. All relevant tests are applied to LLX-Panel-60120-80W-CCT and LLX-Panel-60120-60W-CCT which gives the most unfavourable test result.
Model number	:	See model list
Rating	:	220-240V~, 50/60Hz, Class II, IP20, ta: 40°C, more details see model list
Brand name	:	Longlux
Mains lead	:	0 m
Data cable	:	None
EUT type	:	☒ Table top ☐ Floor standing
Sample received date	:	June 12, 2025
Date of test	:	June 12, 2025 – July 14, 2025

Model list

For size 300*300 series

Mode name	Rated current (A)	Rated wattage (W)	LED Driver	CCT switch
LLX-Panel-3030-10W	0,042	10	LF- GIF040YS1050H	N/A
LLX-Panel-3030-10W-CCT	0,042	10	LF- GIF040YS1050H	With
LLX-Panel-3030-12W	0,05	12	LF- GIF040YS1050H	N/A
LLX-Panel-3030-12W-CCT	0,05	12	LF- GIF040YS1050H	With
LLX-Panel-3030-14W	0,06	14	LF- GIF040YS1050H	N/A
LLX-Panel-3030-14W-CCT	0,06	14	LF- GIF040YS1050H	With
LLX-Panel-3030-16W	0,07	16	LF- GIF040YS1050H	N/A
LLX-Panel-3030-16W-CCT	0,07	16	LF- GIF040YS1050H	With
LLX-Panel-3030-18W	0,08	18	LF- GIF040YS1050H	N/A
LLX-Panel-3030-18W-CCT	0,08	18	LF- GIF040YS1050H	With
LLX-Panel-3030-20W	0,09	20	LF- GIF040YS1050H	N/A
LLX-Panel-3030-20W-CCT	0,09	20	LF- GIF040YS1050H	With
LLX-Panel-3030-24W	0,105	24	LF- GIF040YS1050H	N/A
LLX-Panel-3030-24W-CCT	0,105	24	LF- GIF040YS1050H	With

LLX-Panel-3030-28W	0,14	28	LF- GIF040YS1050H	N/A
LLX-Panel-3030-28W-CCT	0,14	28	LF- GIF040YS1050H	With
LLX-Panel-3030-30W	0,15	30	LF- GIF040YS1050H	N/A
LLX-Panel-3030-30W-CCT	0,15	30	LF- GIF040YS1050H	With

For size 300*600 series

Mode name	Rated current (A)	Rated wattage (W)	LED Driver	CCT switch
LLX-Panel-3060-10W	0,042	10	LF- GIF040YS1050H	N/A
LLX-Panel-3060-10W-CCT	0,042	10	LF- GIF040YS1050H	With
LLX-Panel-3060-12W	0,05	12	LF- GIF040YS1050H	N/A
LLX-Panel-3060-12W-CCT	0,05	12	LF- GIF040YS1050H	With
LLX-Panel-3060-14W	0,06	14	LF- GIF040YS1050H	N/A
LLX-Panel-3060-14W-CCT	0,06	14	LF- GIF040YS1050H	With
LLX-Panel-3060-16W	0,07	16	LF- GIF040YS1050H	N/A
LLX-Panel-3060-16W-CCT	0,07	16	LF- GIF040YS1050H	With
LLX-Panel-3060-18W	0,08	18	LF- GIF040YS1050H	N/A
LLX-Panel-3060-18W-CCT	0,08	18	LF- GIF040YS1050H	With
LLX-Panel-3060-20W	0,09	20	LF- GIF040YS1050H	N/A
LLX-Panel-3060-20W-CCT	0,09	20	LF- GIF040YS1050H	With
LLX-Panel-3060-24W	0,105	24	LF- GIF040YS1050H	N/A
LLX-Panel-3060-24W-CCT	0,105	24	LF- GIF040YS1050H	With
LLX-Panel-3060-28W	0,14	28	LF- GIF040YS1050H	N/A
LLX-Panel-3060-28W-CCT	0,14	28	LF- GIF040YS1050H	With
LLX-Panel-3060-30W	0,15	30	LF- GIF040YS1050H	N/A
LLX-Panel-3060-30W-CCT	0,15	30	LF- GIF040YS1050H	With
LLX-Panel-3060-32W	0,16	32	LF- GIF040YS1050H	N/A
LLX-Panel-3060-32W-CCT	0,16	32	LF- GIF040YS1050H	With
LLX-Panel-3060-36W	0,18	36	LF- GIF040YS1050H	N/A
LLX-Panel-3060-36W-CCT	0,18	36	LF- GIF040YS1050H	With

For size 600*600 series

Mode name	Rated current (A)	Rated wattage (W)	LED Driver	CCT switch
LLX-Panel-6060-20W	0,09	20	LF- GIF040YS1050H	N/A
LLX-Panel-6060-20W-CCT	0,09	20	LF- GIF040YS1050H	With
LLX-Panel-6060-24W	0,105	24	LF- GIF040YS1050H	N/A
LLX-Panel-6060-24W-CCT	0,105	24	LF- GIF040YS1050H	With
LLX-Panel-6060-28W	0,14	28	LF- GIF040YS1050H	N/A
LLX-Panel-6060-28W-CCT	0,14	28	LF- GIF040YS1050H	With
LLX-Panel-6060-30W	0,15	30	LF- GIF040YS1050H	N/A
LLX-Panel-6060-30W-CCT	0,15	30	LF- GIF040YS1050H	With
LLX-Panel-6060-32W	0,16	32	LF- GIF040YS1050H	N/A
LLX-Panel-6060-32W-CCT	0,16	32	LF- GIF040YS1050H	With
LLX-Panel-6060-36W	0,18	36	LF- GIF040YS1050H	N/A
LLX-Panel-6060-36W-CCT	0,18	36	LF- GIF040YS1050H	With
LLX-Panel-6060-40W	0,19	40	LF- GIF040YS1050H	N/A
LLX-Panel-6060-40W-CCT	0,19	40	LF- GIF040YS1050H	With

LLX-Panel-6060-48W	0,21	48	LF- GIF060YS1500H	N/A
LLX-Panel-6060-48W-CCT	0,21	48	LF- GIF060YS1500H	With

For size 620*620 series

Mode name	Rated current (A)	Rated wattage (W)	LED Driver	CCT switch
LLX-Panel-6262-20W	0,09	20	LF- GIF040YS1050H	N/A
LLX-Panel-6262-20W-CCT	0,09	20	LF- GIF040YS1050H	With
LLX-Panel-6262-24W	0,105	24	LF- GIF040YS1050H	N/A
LLX-Panel-6262-24W-CCT	0,105	24	LF- GIF040YS1050H	With
LLX-Panel-6262-28W	0,14	28	LF- GIF040YS1050H	N/A
LLX-Panel-6262-28W-CCT	0,14	28	LF- GIF040YS1050H	With
LLX-Panel-6262-30W	0,15	30	LF- GIF040YS1050H	N/A
LLX-Panel-6262-30W-CCT	0,15	30	LF- GIF040YS1050H	With
LLX-Panel-6262-32W	0,16	32	LF- GIF040YS1050H	N/A
LLX-Panel-6262-32W-CCT	0,16	32	LF- GIF040YS1050H	With
LLX-Panel-6262-36W	0,18	36	LF- GIF040YS1050H	N/A
LLX-Panel-6262-36W-CCT	0,18	36	LF- GIF040YS1050H	With
LLX-Panel-6262-40W	0,19	40	LF- GIF040YS1050H	N/A
LLX-Panel-6262-40W-CCT	0,19	40	LF- GIF040YS1050H	With
LLX-Panel-6262-48W	0,21	48	LF- GIF060YS1500H	N/A
LLX-Panel-6262-48W-CCT	0,21	48	LF- GIF060YS1500H	With

For size 300*1200 series

Mode name	Rated current (A)	Rated wattage (W)	LED Driver	CCT switch
LLX-Panel-30120-20W	0,09	20	LF- GIF040YS1050H	N/A
LLX-Panel-30120-20W-CCT	0,09	20	LF- GIF040YS1050H	With
LLX-Panel-30120-24W	0,105	24	LF- GIF040YS1050H	N/A
LLX-Panel-30120-24W-CCT	0,105	24	LF- GIF040YS1050H	With
LLX-Panel-30120-28W	0,14	28	LF- GIF040YS1050H	N/A
LLX-Panel-30120-28W-CCT	0,14	28	LF- GIF040YS1050H	With
LLX-Panel-30120-30W	0,15	30	LF- GIF040YS1050H	N/A
LLX-Panel-30120-30W-CCT	0,15	30	LF- GIF040YS1050H	With
LLX-Panel-30120-32W	0,16	32	LF- GIF040YS1050H	N/A
LLX-Panel-30120-32W-CCT	0,16	32	LF- GIF040YS1050H	With
LLX-Panel-30120-36W	0,18	36	LF- GIF040YS1050H	N/A
LLX-Panel-30120-36W-CCT	0,18	36	LF- GIF040YS1050H	With
LLX-Panel-30120-40W	0,19	40	LF- GIF040YS1050H	N/A
LLX-Panel-30120-40W-CCT	0,19	40	LF- GIF040YS1050H	With
LLX-Panel-30120-48W	0,21	48	LF- GIF060YS1500H	N/A
LLX-Panel-30120-48W-CCT	0,21	48	LF- GIF060YS1500H	With

For size 600*1200 series

Mode name	Rated current (A)	Rated wattage (W)	LED Driver	CCT switch
LLX-Panel-60120-40W	0,19	40	LF- GIF040YS1050H	N/A
LLX-Panel-60120-40W-CCT	0,19	40	LF- GIF040YS1050H	With
LLX-Panel-60120-48W	0,21	48	LF- GIF060YS1500H	N/A
LLX-Panel-60120-48W-CCT	0,21	48	LF- GIF060YS1500H	With
LLX-Panel-60120-50W	0,25	50	LF- GIF060YS1500H	N/A
LLX-Panel-60120-50W-CCT	0,25	50	LF- GIF060YS1500H	With
LLX-Panel-60120-60W	0,29	60	LF- GIF060YS1500H	N/A
LLX-Panel-60120-60W-CCT	0,29	60	LF- GIF060YS1500H	With
LLX-Panel-60120-72W	0,36	72	LF- GIF040YS1050H	N/A
LLX-Panel-60120-72W-CCT	0,36	72	LF- GIF040YS1050H	With
LLX-Panel-60120-80W	0,38	80	LF- GIF040YS1050H	N/A
LLX-Panel-60120-80W-CCT	0,38	80	LF- GIF040YS1050H	With

1.2 Description of Test Facility

Name	Hangzhou ETA Testing Technology Co., Ltd.
Address	8/F., Building A, The Western Science Park, Yuhang District, Hangzhou, Zhejiang, China
Telephone	86 571 88610058
Telefax	86 571 88610058

2. TEST SPECIFICATIONS

2.1 Standards

EN IEC 55015:2019+A11:2020: Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

EN IEC 61547:2023: Equipment for general lighting purposed EMC immunity requirements

EN IEC 61000-3-2:2019+A1:2021: Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions (equipment input current ≤ 16A per phase)

EN 61000-3-3:2013+A1:2019+A2:2021: Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16A per phase and not subject to conditional connection

2.2 Mode of operation during the test

2.2.1 Description of operation

Within this test report, EUT was tested under all available operation modes and tested under its rating voltage and frequency. Other voltage and frequency is specified if used.

2.2.2 Test Peripherals

Equipment description (Including Brand name)	Model & Serial	Cable description (List Length, Type & Purpose)
-	-	-

2.3 Test Summary

This report is for the exclusive use of ETA's Client and is provided pursuant to the agreement between ETA and its Client. ETA's responsibility and liability are limited to the terms and conditions of the agreement. ETA assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the ETA name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by ETA. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an ETA certification program.

TEST ITEM	RESULT	NOTE
Mains terminal continuous disturbance voltage	Pass	
Radio frequency magnetic field emission	Pass	
Insertion loss	NA	
Radiated Emission	Pass	
Harmonics	Pass	
Voltage fluctuation-Flicker	Pass	
Electrostatic Discharge (ESD)	Pass	
Electric Fast Transient /Burst (EFT/B)	Pass	
Surge	Pass	
Injected Current	Pass	
RF electromagnetic field susceptibility	Pass	
Voltage dips and interruption	Pass	

Notes:

1. NA =Not Applicable.
2. Margin to the limit is within the uncertainty interval of the measured value.

Emission Test

3. Mains/Load/Control Terminal Continuous Disturbance Voltage

Test result: PASS

3.1 Terminal Voltage Limits for the frequency range 9kHz to 30MHz

3.1.1 Disturbance voltage limits at mains terminals

Frequency range (MHz)	Limits dB(μV) Quasi-peak	Average
0.009 ~ 0.05	110	-
0.05 ~ 0.15	90 ~ 80 *	-
0.15 ~ 0.5	66 ~ 56 *	56 ~ 46 *
0.5 ~ 5.0	56	46
5.0 ~ 30	60	50

Notes:

1. * means the limit decreasing linearly with the logarithm of the frequency in the range 0.05MHz ~ 0.15MHz and 0.15MHz to 0.5MHz.
2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.


3.1.2 Disturbance voltage limits at load and control terminals

Frequency range (MHz)	Limits dB(μV) Quasi-peak	Average
0.15 ~ 0.5	80	70
0.5 ~ 5	74	64
5 ~ 30	74	64

Note: If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

3.2 Block Diagram of Test Setup


☒ At mains terminal

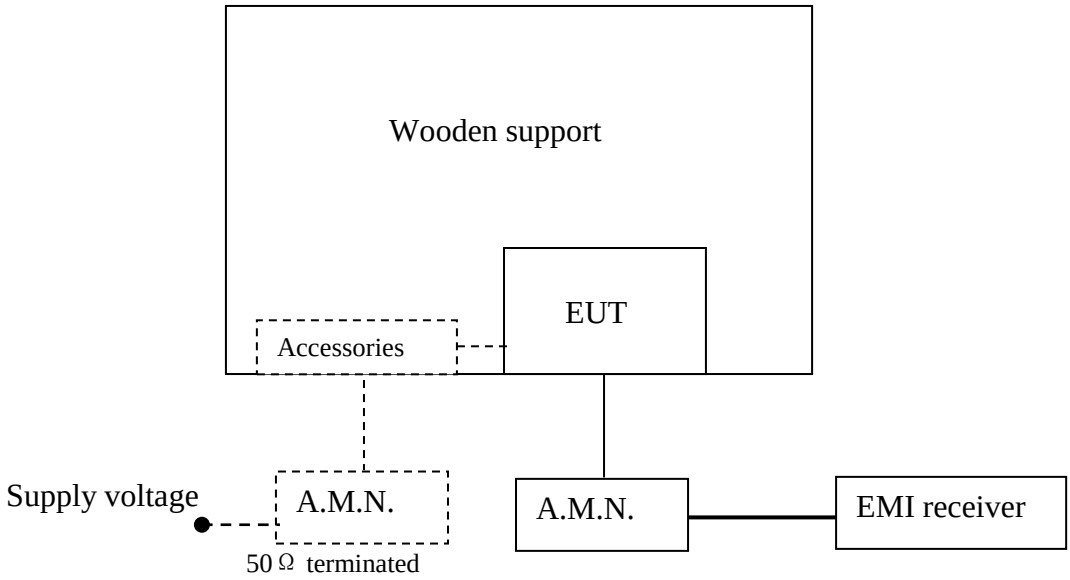

☒ For table top equipment, wooden support is 0.8m height table

☐ For floor standing equipment, wooden support is 0.1m height rack.

☐ At output and control terminals

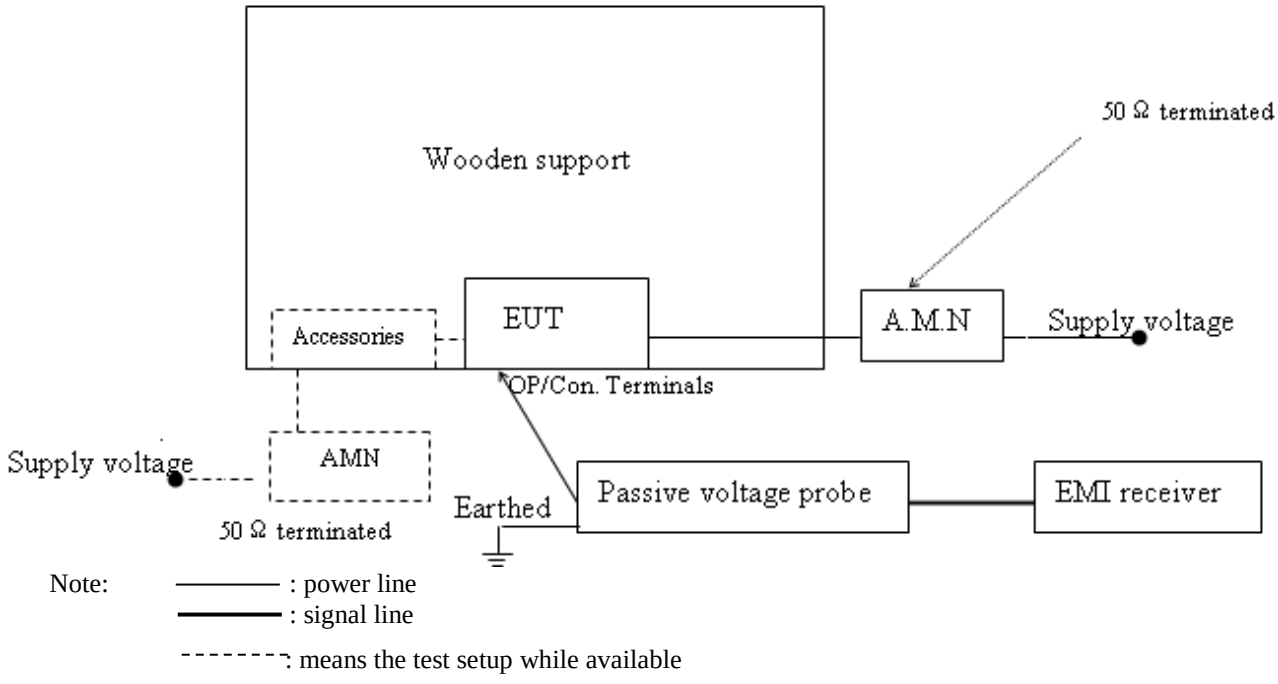

3.3 Test Setup and Test Procedure

3.3.1 Test setup

Detailed test procedure and arrangement was following clause 8 of EN 55015.
Operation conditions of EUT were according to clause 6 of EN 55015.
Measurement was carried out with lamps which have been in operation for:

2h for incandescent lamps;
100h for fluorescent lamps.

Prior to a measurement, the lamps were operated until stabilization has been reached, and the following stabilization time was observed:

5 min for incandescent lamp;
15 min for fluorescent lamp;
30 min for other discharge lamps.

3.3.2 Test procedure

All measurements were according to clause 8.1.1, 8.1.2, 8.1.3, 8.1.4 and 8.1.5 of EN 55015 and For:

☐ Indoor luminaires
The measurement was carried in accordance with clause 8.2 of EN 55015

☐ Outdoor luminaires
The measurement was carried in accordance with clause 8.2 of EN 55015

☐ Independent light regulating devices
The measurement was carried in accordance with clause 8.3 of EN 55015

☐ Independent transformers and convertors for incandescent lamps or LED light sources
The measurement was carried in accordance with clause 8.4 of EN 55015

☐ Independent ballasts for fluorescent and other discharge lamps
The measurement was carried in accordance with clause 8.5 of EN 55015

☒ Self-ballasted lamps and semi-luminaires
The measurement was carried in accordance with clause 8.6 of EN 55015

☐ UV and IR radiation appliances
The measurement was carried in accordance with clause 8.7 of EN 55015

☐ Self-contained emergency lighting luminaires
The measurement was carried in accordance with clause 8.8 of EN 55015

☐ Independent starters and igniters for fluorescent and other discharge lamps
The measurement was carried in accordance with clause 8.9 of EN 55015

The frequency from 9kHz to 30MHz was checked.
The bandwidth of test receiver was set on 200Hz (from 9kHz to 150kHz) and 9kHz (from 150kHz to 30MHz).

3.4 Test Protocol


Temperature : 24°C

Relative Humidity : 52 %

For mains terminal: Pass

LLX-Panel-60120-80W-CCT


L

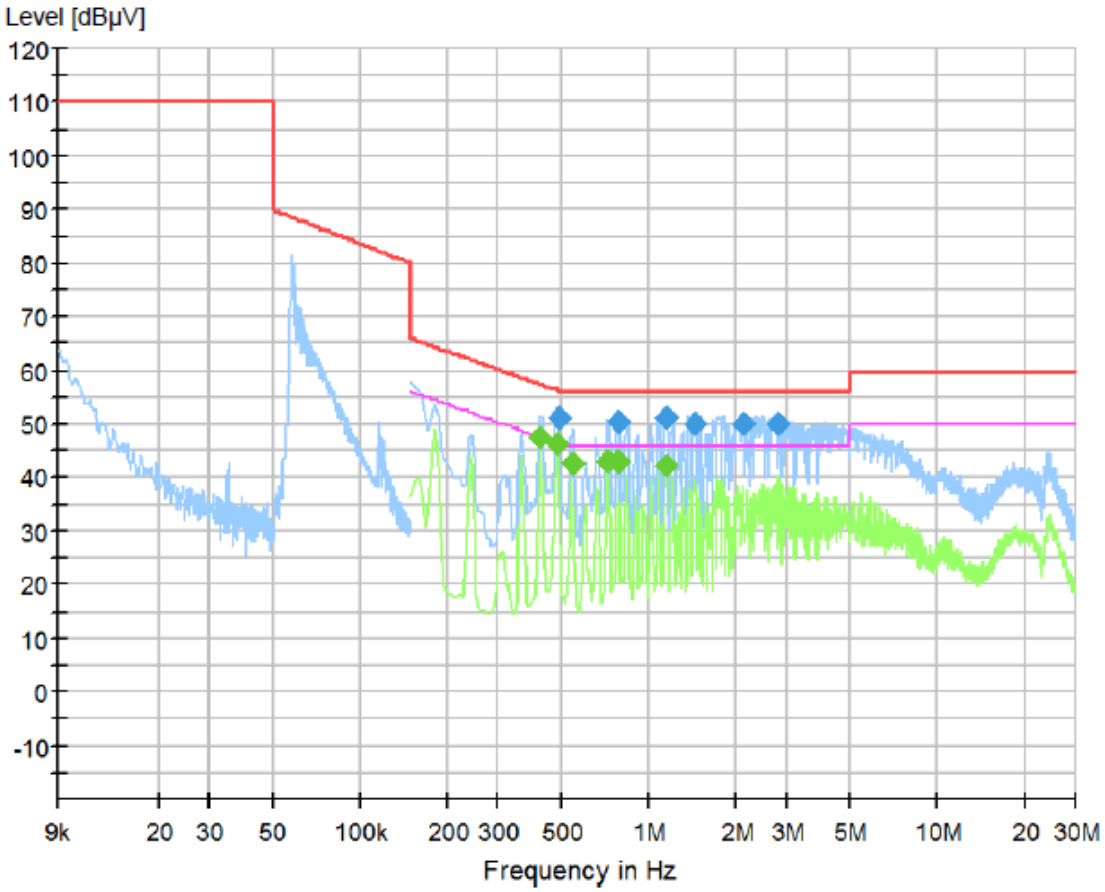

Trace	Frequency (MHz)	Level (dBµV)	Limit (dBµV)	Delta Limit (dB)
1 QP	0.488	51.13	56.21	5.08
1 QP	0.789	50.53	56.00	5.47
1 QP	1.154	51.19	56.00	4.81
1 QP	1.446	50.10	56.00	5.90
1 QP	2.130	50.19	56.00	5.81
1 QP	2.796	50.15	56.00	5.58
2 CA	0.420	46.36	47.45	1.09
2 CA	0.483	45.17	46.29	1.12
2 CA	0.542	42.79	46.00	3.21
2 CA	0.717	43.02	46.00	2.98
2 CA	0.789	43.15	46.00	2.85
2 CA	1.534	42.38	46.00	3.62

LLX-Panel-60120-80W-CCT


N

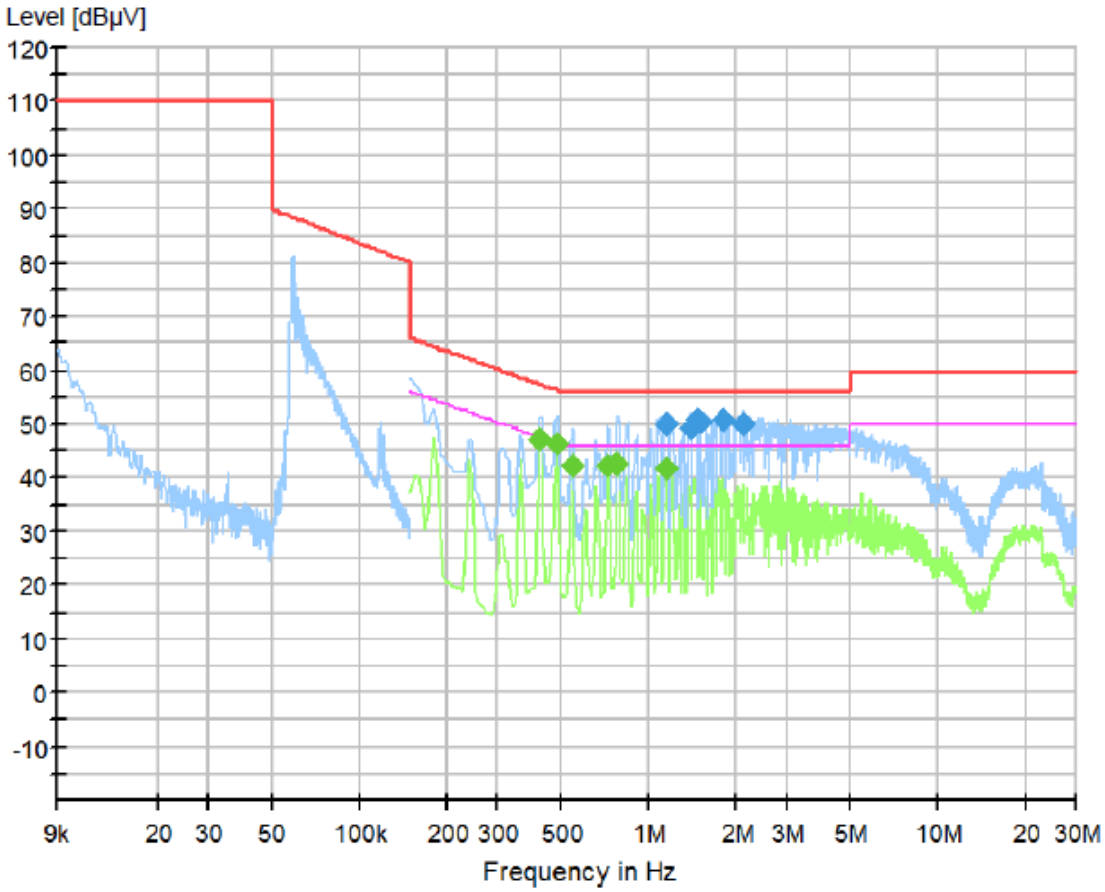

Trace	Frequency (MHz)	Level (dBµV)	Limit (dBµV)	Delta Limit (dB)
1 QP	1.158	49.83	56.00	6.17
1 QP	1.383	49.09	56.00	6.91
1 QP	1.460	50.92	56.00	5.08
1 QP	1.518	50.39	56.00	5.61
1 QP	1.824	50.65	56.00	5.35
1 QP	2.126	50.15	56.00	5.85
2 CA	0.420	45.98	47.45	1.47
2 CA	0.483	45.28	46.29	1.01
2 CA	0.542	42.07	46.00	3.93
2 CA	0.717	42.23	46.00	3.77
2 CA	0.776	42.47	46.00	3.53
2 CA	1.154	41.90	46.00	4.10

LLX-Panel-60120-60W-CCT


L

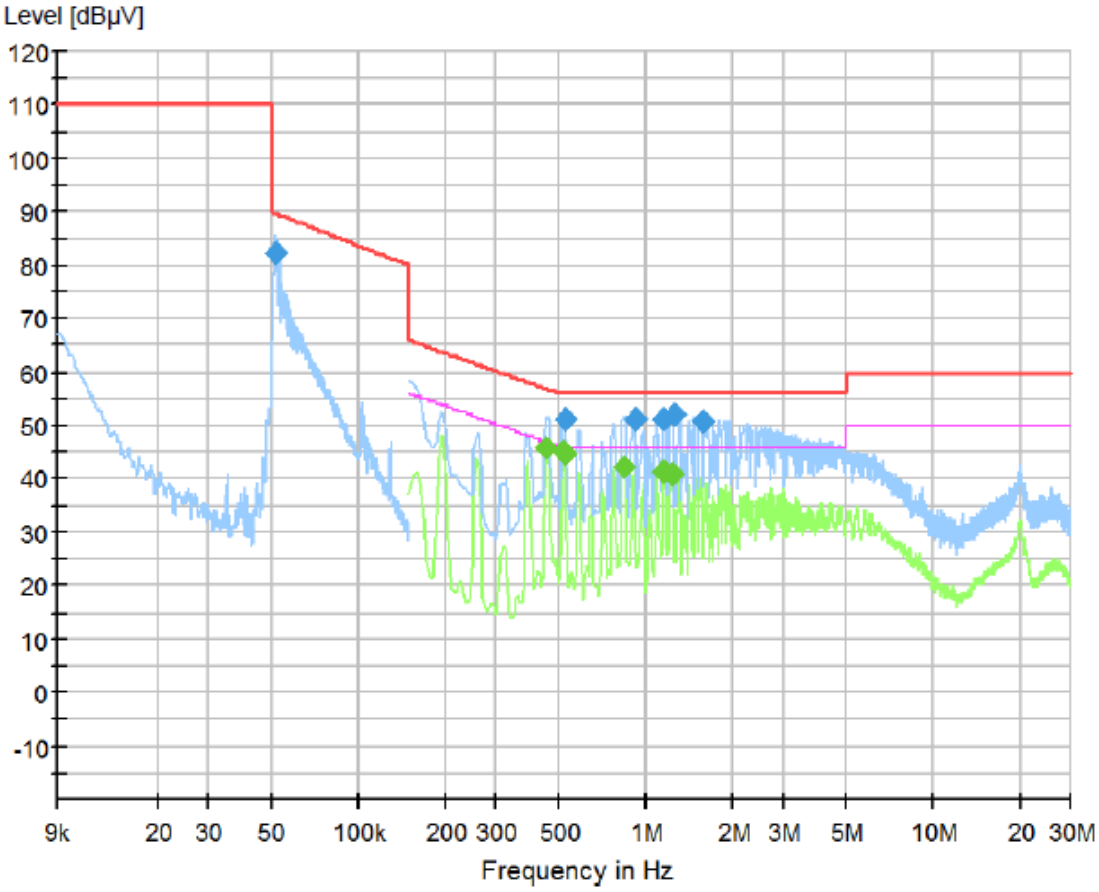

Trace	Frequency (MHz)	Level (dBµV)	Limit (dBµV)	Delta Limit (dB)
1 QP	0.052	82.54	89.70	7.16
1 QP	0.524	51.23	56.00	4.77
1 QP	0.915	51.07	56.00	4.93
1 QP	1.154	51.26	56.00	4.74
1 QP	1.244	52.16	56.00	3.84
1 QP	1.568	51.02	56.00	4.98
2 CA	0.452	45.79	46.85	1.06
2 CA	0.519	44.89	46.00	1.11
2 CA	0.524	44.71	46.00	1.29
2 CA	0.834	42.06	46.00	3.94
2 CA	1.154	41.58	46.00	4.42
2 CA	1.239	41.20	46.00	4.80

LLX-Panel-60120-60W-CCT

N

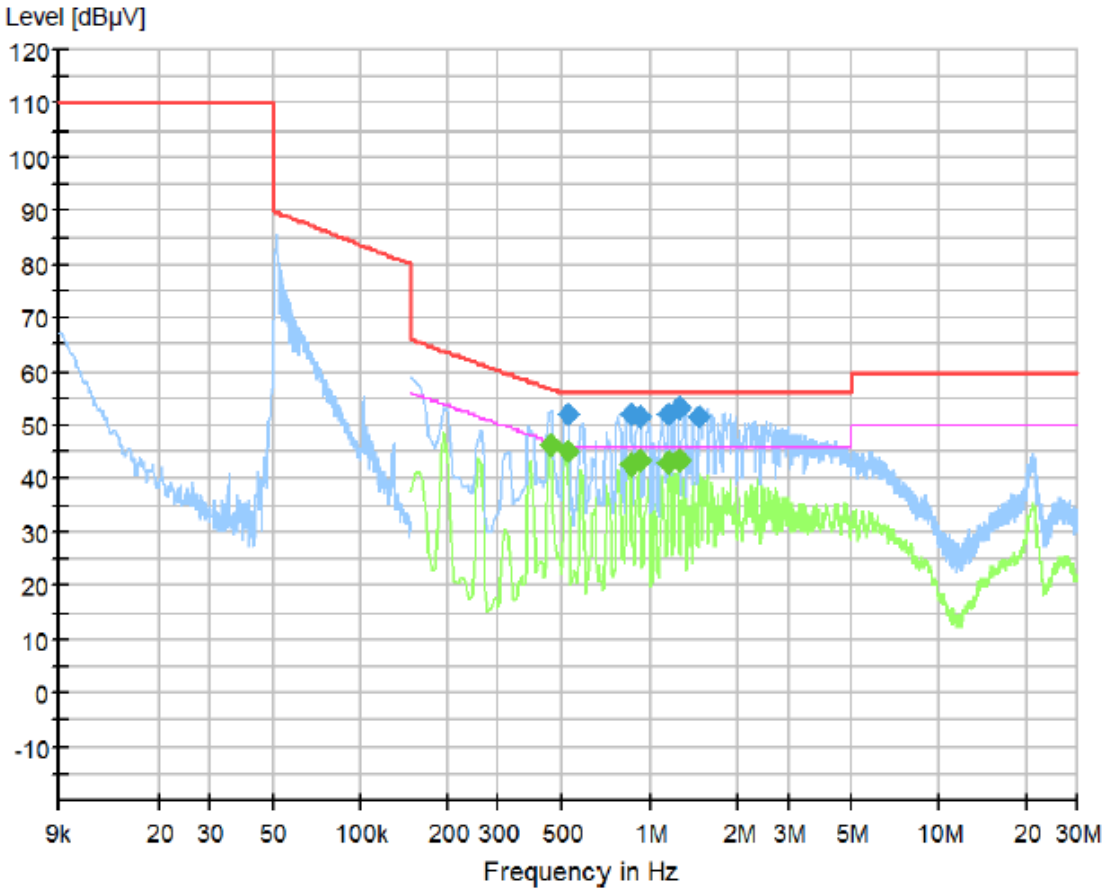

Trace	Frequency (MHz)	Level (dBµV)	Limit (dBµV)	Delta Limit (dB)
1 QP	0.524	52.24	56.00	3.76
1 QP	0.852	52.11	56.00	3.89
1 QP	0.920	51.53	56.00	4.47
1 QP	1.154	52.25	56.00	3.75
1 QP	1.244	53.12	56.00	2.88
1 QP	1.473	51.68	56.00	4.32
2 CA	0.456	46.13	46.77	0.64
2 CA	0.524	44.99	46.00	1.01
2 CA	0.852	42.58	46.00	3.42
2 CA	0.915	43.39	46.00	2.61
2 CA	1.149	43.06	46.00	2.94
2 CA	1.244	43.50	46.00	2.50

For load/control terminal: NA

Frequency (MHz)	Quasi-peak		Average	
	Disturbance level dB(⌈V)	Permitted limit dB(⌈V)	Disturbance level dB(⌈V)	Permitted limit dB(⌈V)
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
Note: * means the emission level 20dB below the relevant limit.				

3.5 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty at mains terminal: ±2.96dB (0.15MHz-30MHz), ±3.32dB(9kHz-150kHz)

Measurement uncertainty at load/control terminal: ±2.61/±3.38dB.

The measurement uncertainty is given with a confidence of 95%, k=2.

3.6 Additions, Deviations and Exclusions from Standards

None.


4. Radiated Electromagnetic Disturbance

Test result: PASS

4.1 Radiated Electromagnetic Disturbance Limit for frequency range 9kHz to 30MHz

Frequency Range	Limits for loop diameter dB(μA) (a)		
	2m	3m	4m
9kHz – 70kHz	88	81	75
70kHz - 150kHz	88 to 58 (b)	81 to 51 (b)	75 to 45(b)
150kHz – 3.0MHz	58 to 22 (b)	51 to 15 (b)	45 to 9 (b)
3.0MHz – 30MHz	22	15 to 16 (c)	9 to 12 (c)
Notes: a: At the transition frequency, the lower limit applies. b: Decreasing linearly with the logarithm of the frequency. c: Increasing linearly with the logarithm of the frequency.			

4.2 Block Diagram of Test Setup

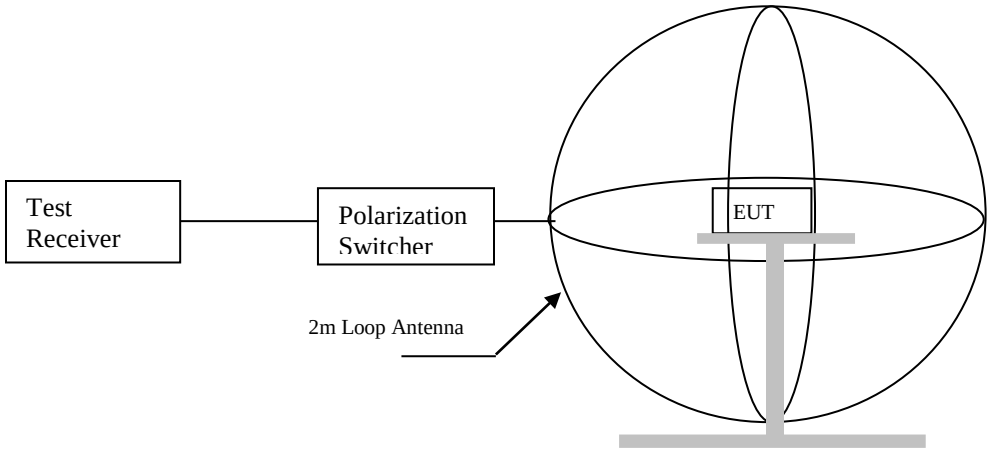

4.3 Test Setup and Test Procedure

Measurement was performed in shielded room, and instruments used were following clause 9.1.1 of EN 55015.

Detailed test procedure and arrangement was following clause 9 of EN 55015.

Frequency range 9kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 200Hz (from 9kHz to 150kHz) and 9kHz (from 150kHz to 30MHz).


4.4 Test Protocol

Temperature : 24 °C


Relative Humidity : 52%

The worst testing data is listed in the report as representative.


X direction

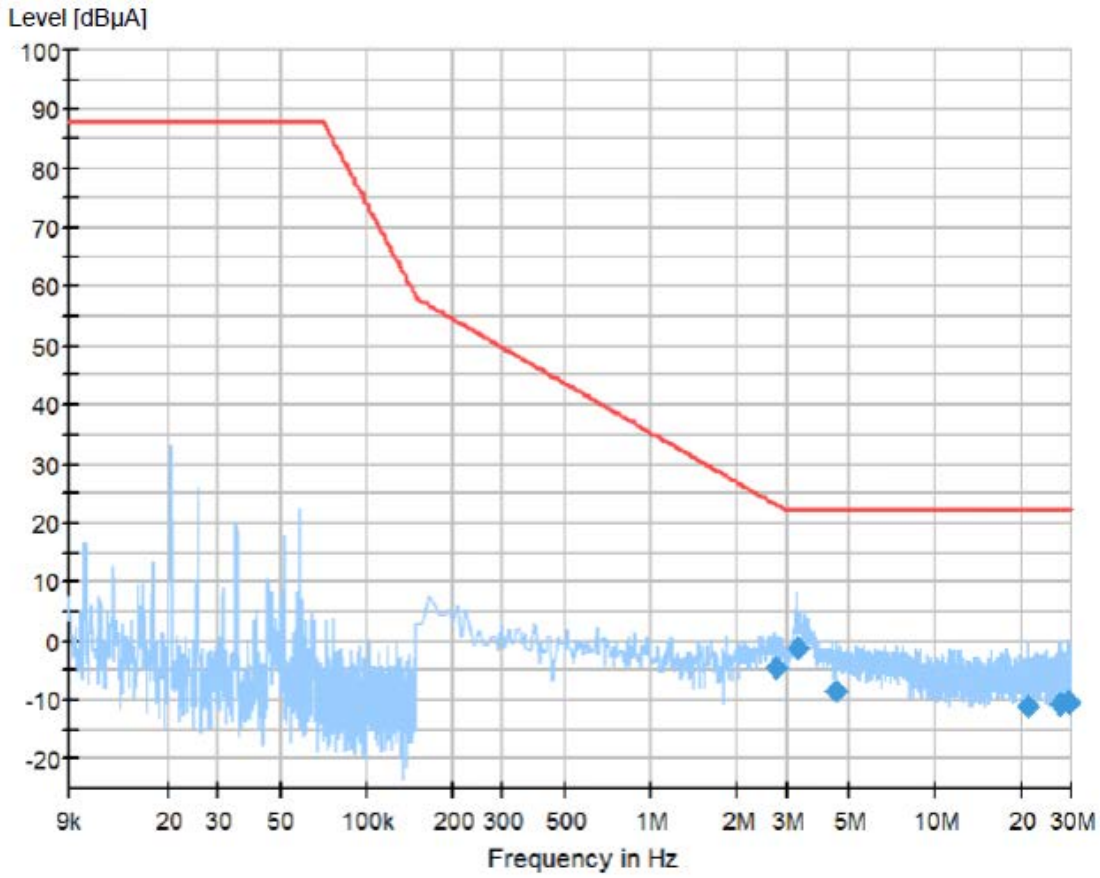

Y direction

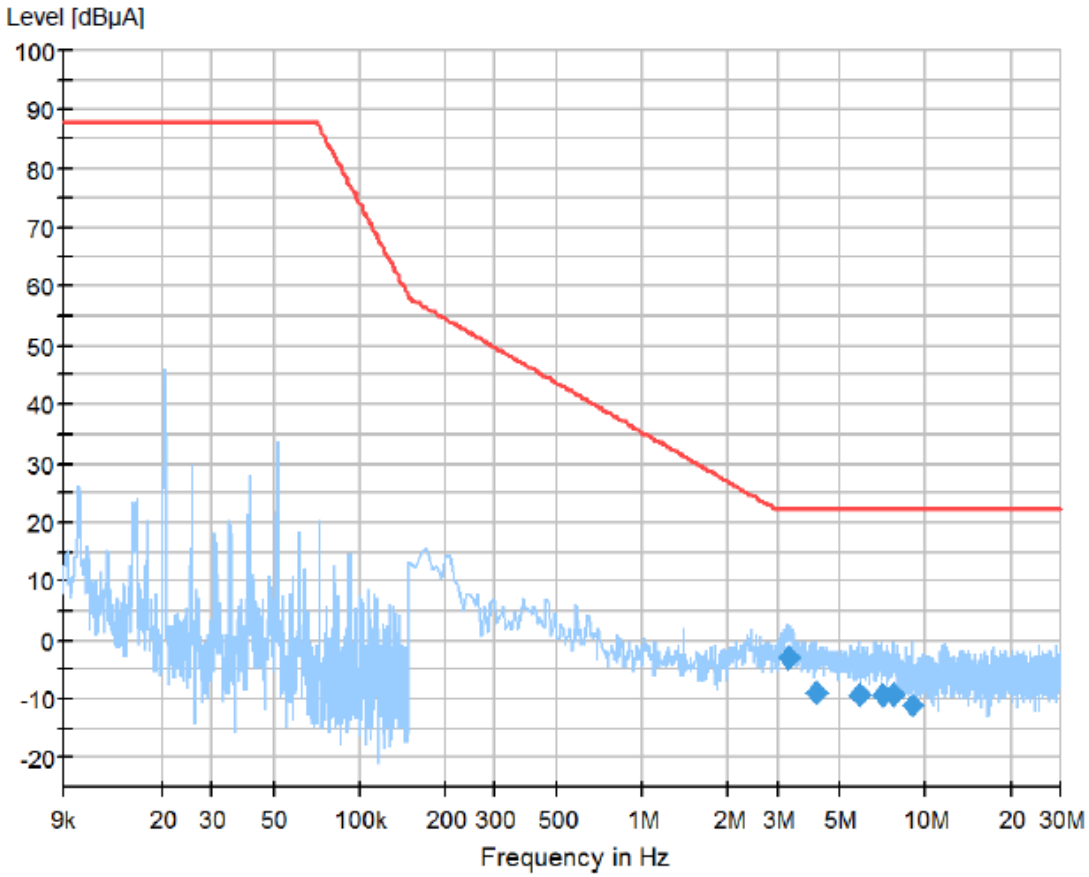
Level [dBµA]
100
90
80
70
60
50
40
30
20
10
0
-10
-20
9k
20
30
50
100k
200
300
500
1M
2M
3M
5M
10M
20
30M
Frequency in Hz

Z direction

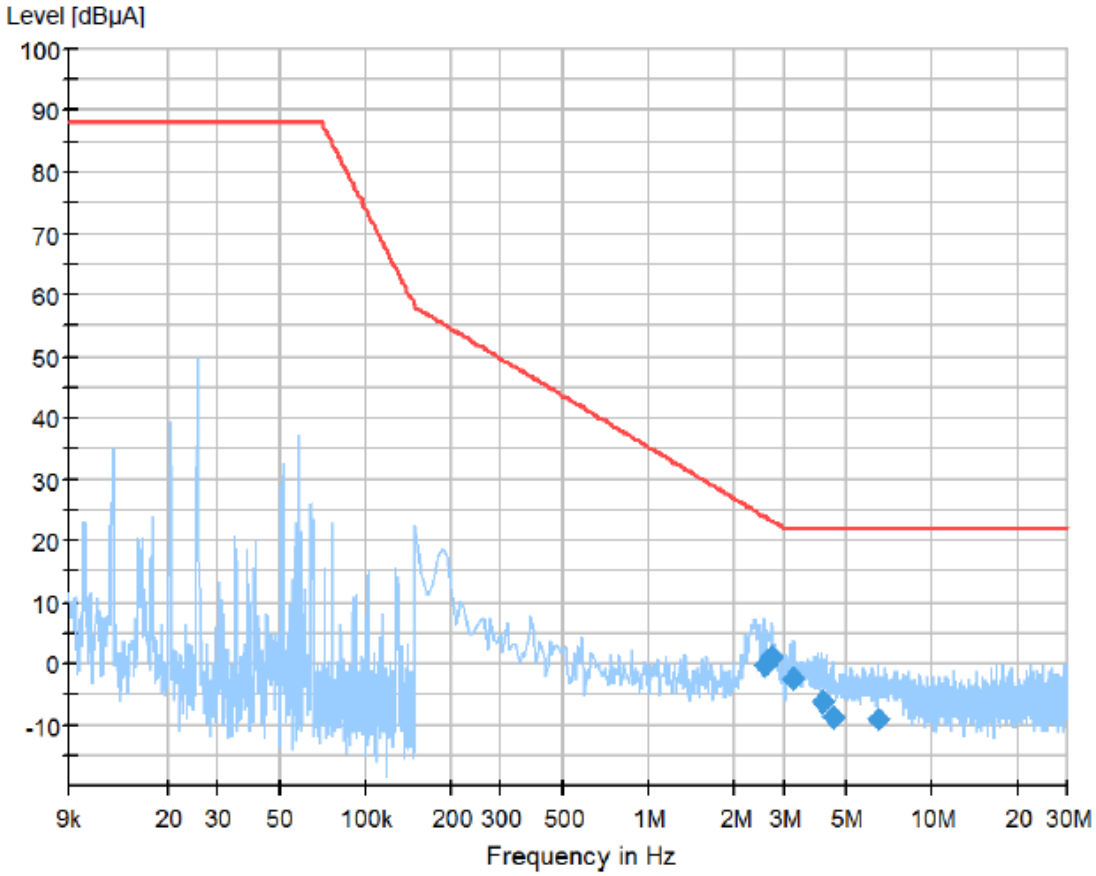

Frequency (MHz)	Quasi-peak (dBµV)			
	Disturbance level			Permitted limi
	X direction	Y direction	Z direction	(dB)
0.009	*	*	*	*
0.050	*	*	*	*
0.100	*	*	*	*
0.240	*	*	*	*
0.550	*	*	*	*
1.000	*	*	*	*
1.400	*	*	*	*
2.000	*	*	*	*
3.500	*	*	*	*
6.000	*	*	*	*
10.000	*	*	*	*
22.000	*	*	*	*
30.000	*	*	*	*
Notes: * means the radiated electromagnetic disturbance level 20dB lower than the relevant limit.				

4.5 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of radiated disturbance: ±2.82dB (0.15MHz-30MHz), ±2.91dB (9kHz - 150kHz).

The measurement uncertainty is given with a confidence of 95%, k=2.

4.6 Additions, Deviations and Exclusions from Standards

None.


5. Insertion Loss

Test result: **NA**

5.1 Insertion loss limit

Frequency range (kHz)	Minimum Values (dB)
150 to 160	28
160 to 1400	28 to 20*
1400 to 1605	20
Note: *means decreasing linearly with the logarithm of frequency.	

5.2 Block diagram of test set up

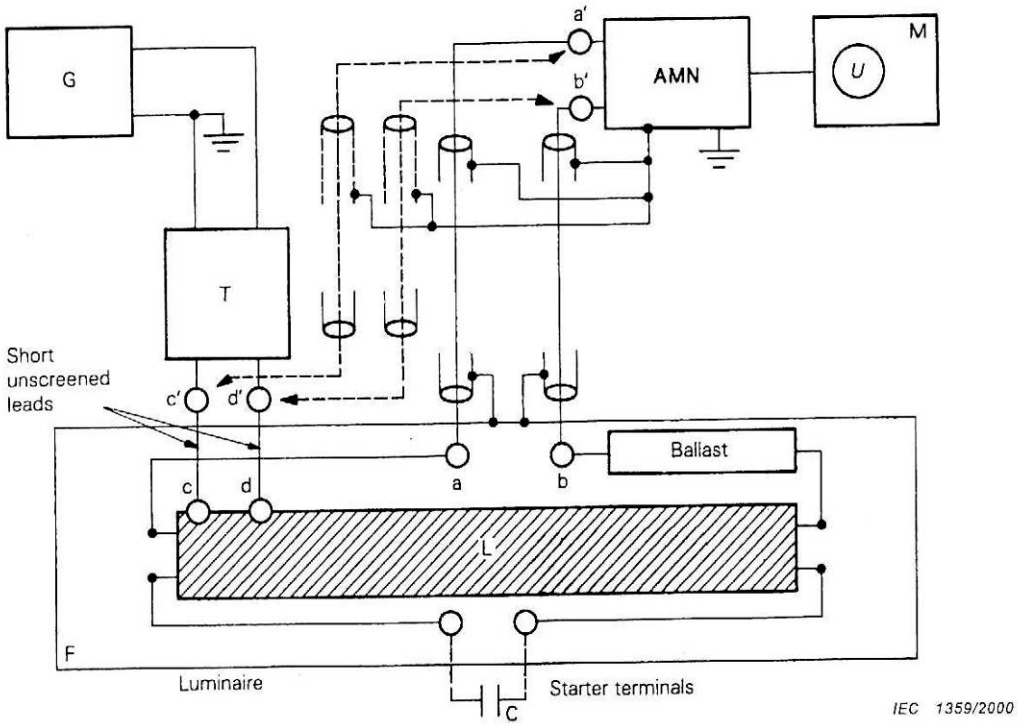


Key

G	=	r.f. generator
T	=	balance-to-unbalance transformer
AMN	=	50 Ω/50 µH + 5 Ω (or 50 Ω/50 µH) artificial mains network as specified in CISPR 16-1
M	=	r.f. millivoltmeter or measuring receiver
L	=	dummy lamp
F	=	luminaire
C	=	capacitor
a – b	=	mains terminals
a' – b'	=	input terminals of the measuring network AMN
c – d	=	r.f. terminals of dummy lamp L
c' – d'	=	output terminals of T
a – a' and b – b'	=	connections by coaxial cables (Z_0 = 75 Ω), with the respective ends of the screens connected to the reference earth of AMN and F not exceeding 50 cm in length
c – c' and d – d'	=	connections of the transformer to the dummy lamp shall be made with unscreened leads not exceeding 100 mm in length

NOTE When measuring U-type lamp luminaires, the same circuit arrangement is used, but the linear dummy lamp should be replaced by the U-type dummy lamp.


Figure 1 – Insertion loss measurement on linear and U-type fluorescent lamp luminaires

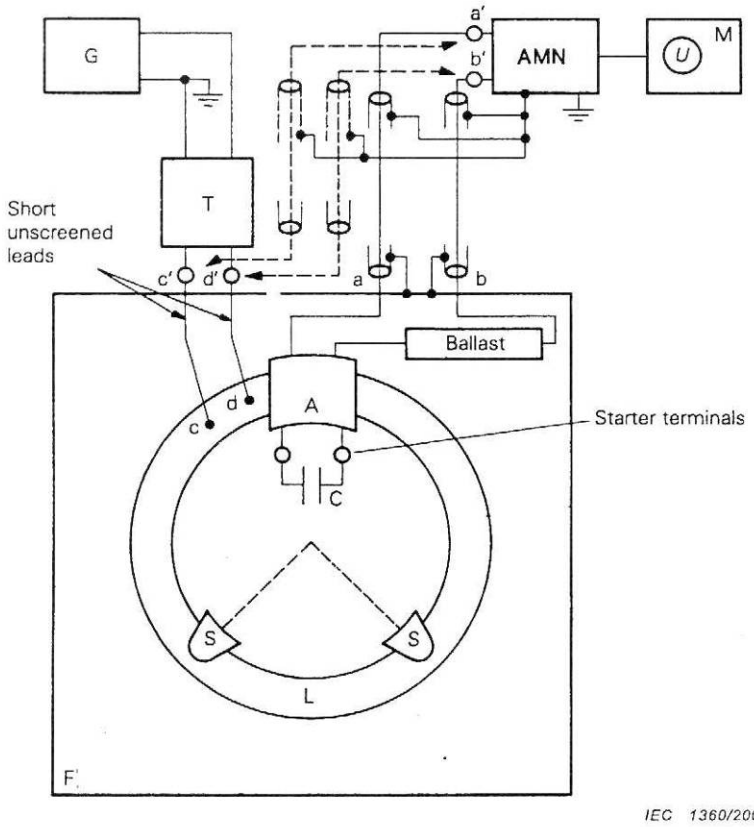

Key

G	=	r.f. generator
T	=	balance-to-unbalance transformer
AMN	=	50 Ω/50 µH + 5 Ω (or 50 Ω/50 µH) artificial mains network as specified in CISPR 16-1
M	=	r.f. millivoltmeter or measuring receiver
L	=	dummy lamp
F	=	luminaire
C	=	capacitor
A	=	lampholder
S	=	supports of insulating material
a – b	=	mains terminals
a' – b'	=	input terminals of the measuring network AMN
c – d	=	r.f. terminals of dummy lamp L
c' – d'	=	output terminals of T
a – a' and b – b'	=	connections by coaxial cables (Z_0 = 75 Ω), with the respective ends of the screens connected to the reference earth of AMN and F, not exceeding 50 cm in length
c – c' and d – d'	=	connections of the transformer to the dummy lamp shall be made with unscreened leads not exceeding 100 mm in length

Figure 2 – Insertion loss measurement on circular fluorescent lamp luminaires

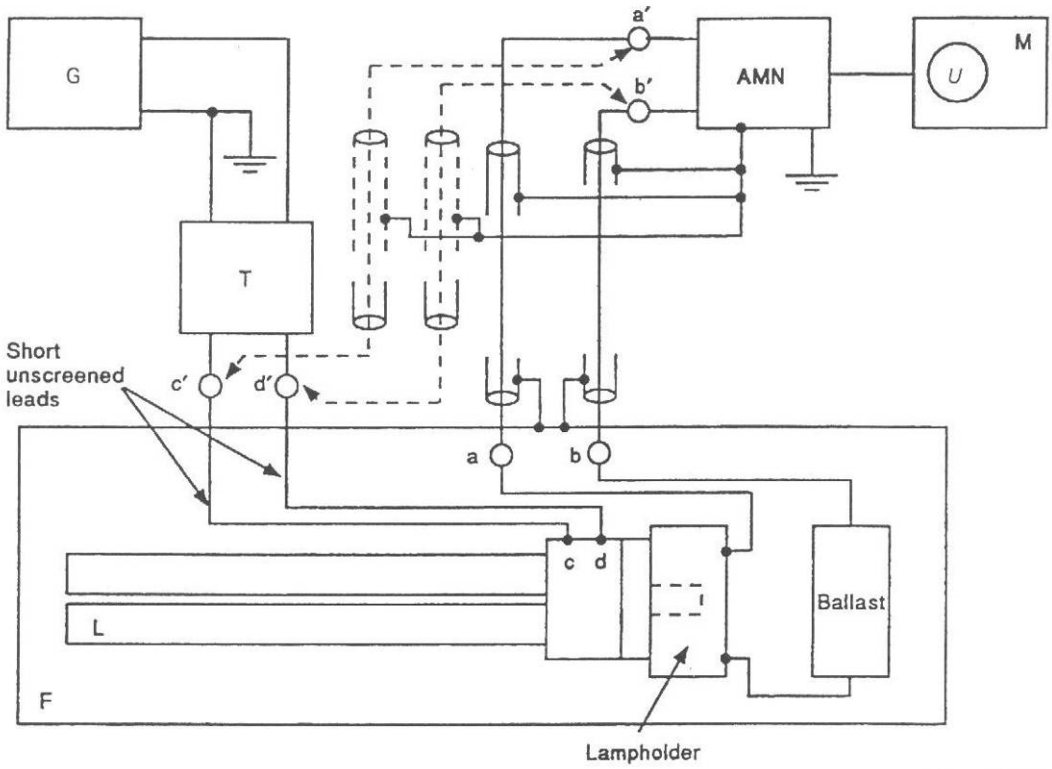

Key

G	=	r.f. generator
T	=	balance-to-unbalance transformer
AMN	=	50 Ω/50 μH + 5 Ω (or 50 Ω/50 μH) artificial mains network as specified in CISPR 16-1
M	=	r.f. millivoltmeter or measuring receiver
L	=	dummy lamp
F	=	luminaire
a – b	=	mains terminals
a′ – b′	=	input terminals of the measuring network AMN
c – d	=	r.f. terminals of dummy lamp L
c′ – d′	=	output terminals of T
a – a′ and b – b′	=	connections by coaxial cables (Z_0 = 75 Ω), with the respective ends of the screens connected to the reference earth of AMN and F, not exceeding 50 cm in length
c – c′ and d – d′	=	connections of the transformer to the dummy lamp shall be made with unscreened leads not exceeding 100 mm in length

Figure 3 – Insertion loss measurement on luminaires for single-capped fluorescent lamps with integrated starter

5.3 Test Procedure

Detailed test procedure and arrangement was following clause 7.2 and clause 7.4 of EN 55015.

5.4 Test Protocol

Temperature	:	24 °C
Relative Humidity	:	52 %

5.5 Additions, Deviations and Exclusions from Standards

None.

6. Radiated emission/Conducted RF emission

Test result: **PASS**

6.1 Limit

☐ 6.1.1 Radiated emission limit from frequency range 30MHz – 300MHz

Frequency (MHz)	Permitted limit in dBμV/m (Quasi-peak) of Measurement Distance 3m	Permitted limit in dBμV/m (Quasi-peak) of Measurement Distance 10m
30-230	40	30
230-300	47	37

Notes:
1. For the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades.
2. The gray rows are selected items.


☒ 6.1.2 Common mode terminal voltage limits 30MHz – 300MHz

Frequency (MHz)	Quasi-peak limits dB(μV)
30-100	64 to 54*
100-200	54
200-300	54 to 51

Notes:
1. At the transition frequency, the lower limit applies.
2. The limit decreases linearly with the logarithm of the frequency.


6.2 Block diagram and test set up

☐For radiated method

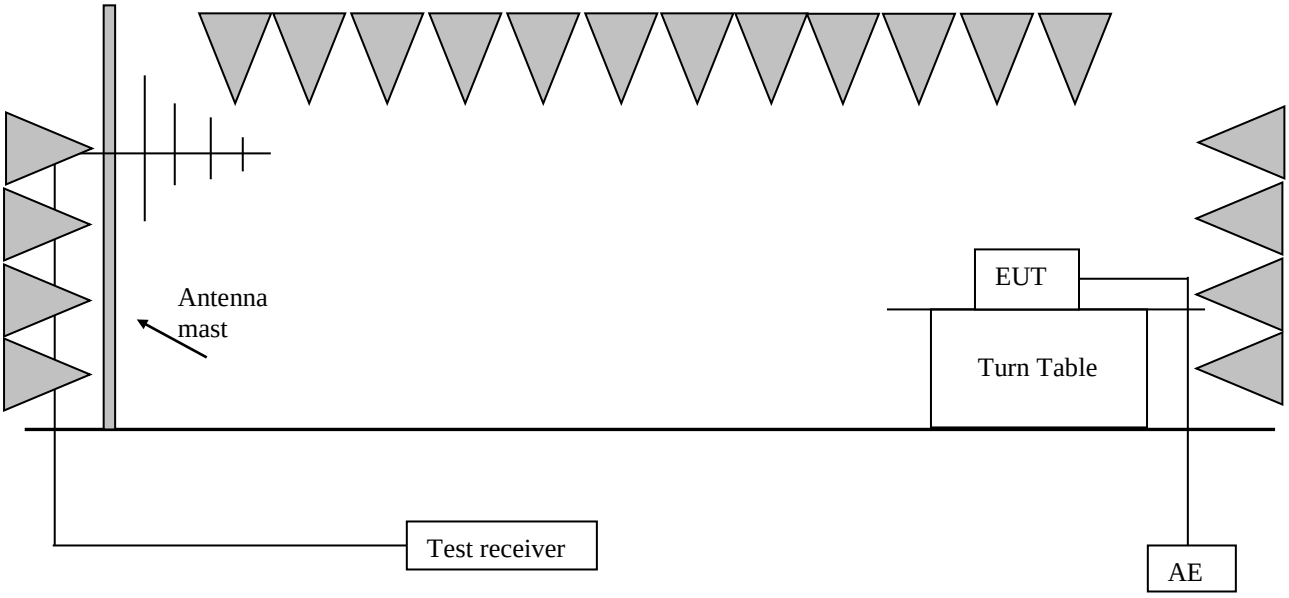

The measurement was applied in a semi-anechoic chamber.
Measurement was performed according to clause 10 of CISPR 22.
Setting of EUT is according to clause 9.2 & Annex C of EN 55015.
The bandwidth setting on test receiver was 120kHz.
The frequency range from 30MHz to 300MHz was checked.

☒For conducted method

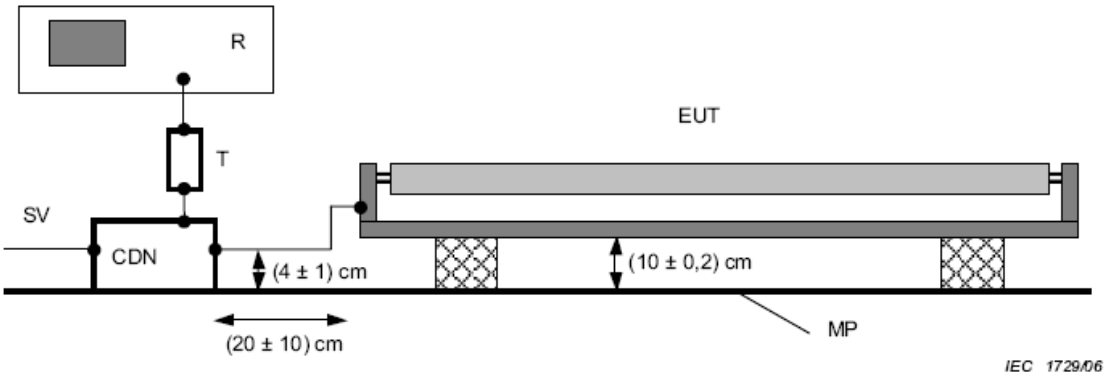

Components

R	Measuring receiver	CDN	Coupling-decoupling network
SV	Supply voltage	EUT	Equipment under test
MP	Earthed metal plate	T	6 dB, 50 Ω attenuator

Measurement and setting of EUT were performed according to Annex B of EN 55015.
The frequency range from 30MHz to 300MHz was checked.

6.3 Test Protocol

Test is performed while employing:


☐ Radiated method (EN 55015 Annex C)

☒ Conducted method (EN 55015 Annex B)

Temperature : 24°C


Relative humidity : 52%

LLX-Panel-60120-80W-CCT

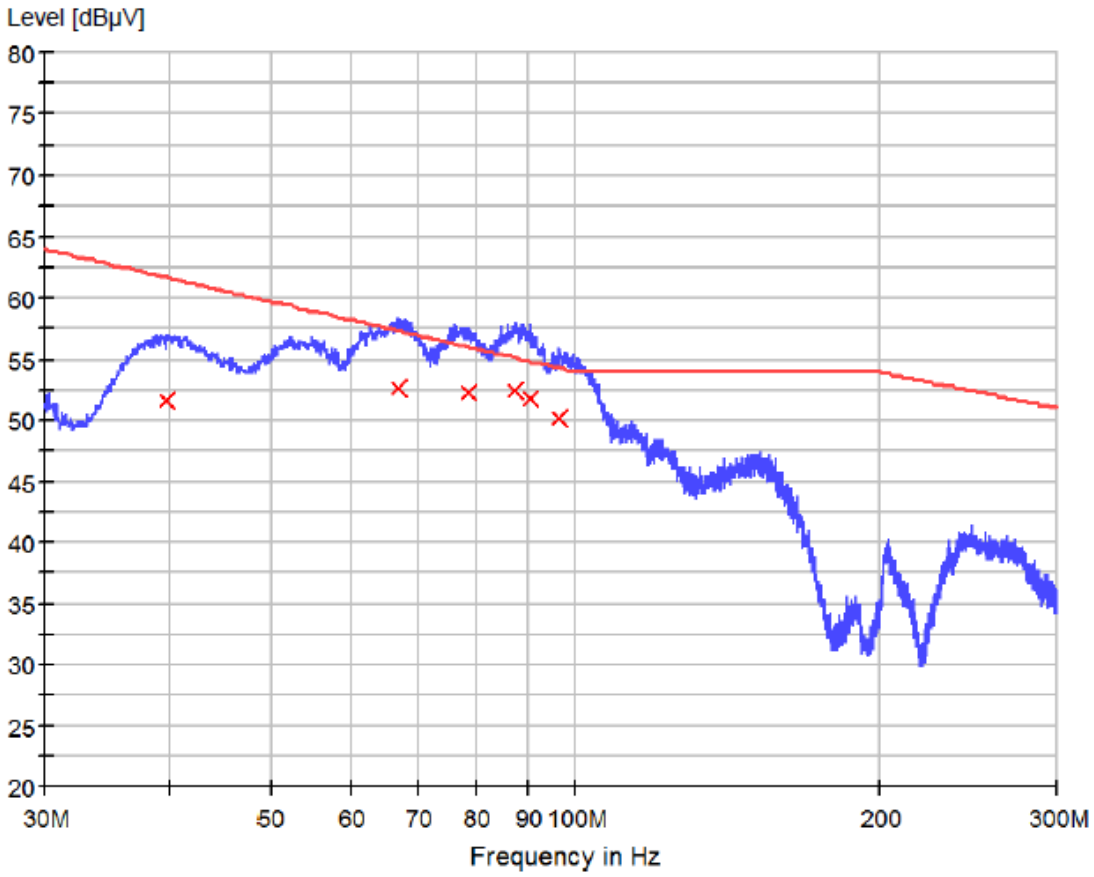

Trace	Frequency (MHz)	Level (dBµV)	Limit (dBµV)	Delta Limit (dB)
1 QP	39.600	51.5	61.7	10.2
1 QP	66.960	52.7	57.3	4.6
1 QP	78.240	52.2	56.0	3.8
1 QP	87.240	52.5	55.1	2.6
1 QP	90.420	51.8	54.8	3.0
1 QP	96.360	50.2	54.3	4.2

LLX-Panel-60120-60W-CCT

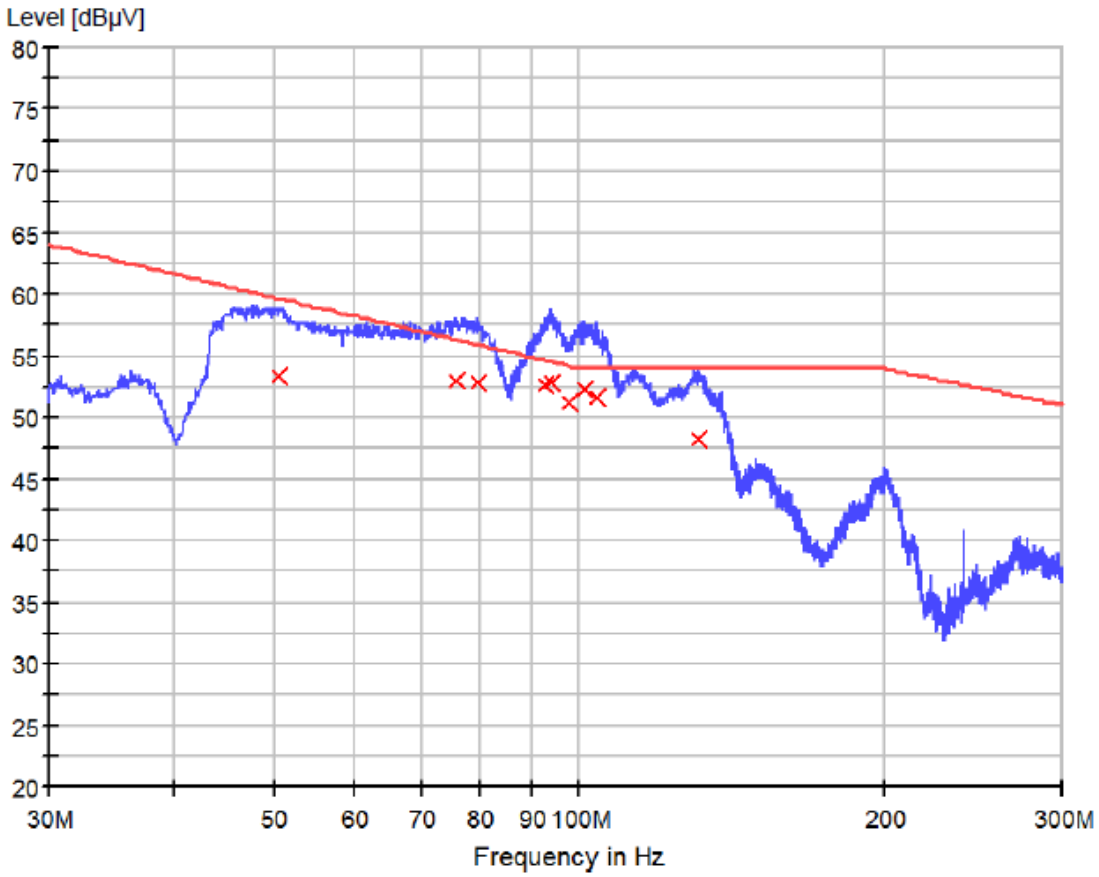

Trace	Frequency (MHz)	Level (dBµV)	Limit (dBµV)	Delta Limit (dB)
1 QP	50.640	53.3	59.7	6.3
1 QP	75.780	52.9	56.3	3.4
1 QP	79.560	52.8	55.9	3.1
1 QP	92.400	52.7	54.7	2.0
1 QP	93.720	52.9	54.5	1.7
1 QP	97.620	51.2	54.2	3.0
1 QP	101.340	52.4	54.0	1.6
1 QP	104.040	51.6	54.0	2.4
1 QP	130.980	48.2	54.0	5.8

6.4 Measurement uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of radiated method/conducted method is: ± 4.90/± 3.96dB.

The measurement uncertainty is given with a confidence of 95%, k=2.


6.5 Additions, Deviations and Exclusions from Standards

None.

7. Harmonics

Test result: PASS

7.1 Block Diagram of Test Setup



7.2 Test Setup and Test Procedure

Harmonics of the fundamental current were measured up to 40 order harmonics using a digital power meter with an analogue output and frequency analyser which was integrated in the harmonic & flicker test system. The measurements were carried out under steady conditions.

7.3 Test Protocol

Temperature	:	24°C
Relative Humidity	:	52%

☒ Measuring instrumentations according to IEC 61000-4-7: 2002+A1:2008.

Harmonic currents measurement result for LLX-Panel-60120-80W-CCT
Class C

V_RMS (Volts)	: 230.0	Frequency (Hz)	: 50.0
I_Peak (Amps)	: 0.574	I_RMS (Amps)	: 0.358
I_Fund (Amps)	: 0.356	Crest Factor	: 1.619
Power (Watts)	: 80.4	Power Factor	: 0.977

Harm#	Harms (avg)	100% Limit	%of Limit	Harms (max)	150% Limit	%of Limit	Status
2	0.001	0.004	N/A	0.001	0.005	N/A	Pass
3	0.018	0.052	34.0	0.019	0.078	24.5	Pass
5	0.005	0.018	N/A	0.008	0.027	N/A	Pass
7	0.001	0.012	N/A	0.004	0.019	N/A	Pass
9	0.000	0.009	N/A	0.004	0.013	N/A	Pass
11	0.001	0.005	N/A	0.004	0.008	N/A	Pass
13	0.001	0.005	N/A	0.004	0.008	N/A	Pass
15	0.000	0.005	N/A	0.003	0.008	N/A	Pass
17	0.001	0.005	N/A	0.001	0.008	N/A	Pass
19	0.000	0.005	N/A	0.000	0.008	N/A	Pass
21	0.001	0.005	N/A	0.001	0.008	N/A	Pass
23	0.000	0.005	N/A	0.001	0.008	N/A	Pass
25	0.001	0.005	N/A	0.001	0.008	N/A	Pass
27	0.001	0.005	N/A	0.001	0.008	N/A	Pass
29	0.000	0.005	N/A	0.000	0.008	N/A	Pass
31	0.001	0.005	N/A	0.001	0.008	N/A	Pass
33	0.000	0.005	N/A	0.000	0.008	N/A	Pass
35	0.001	0.005	N/A	0.001	0.008	N/A	Pass
37	0.001	0.005	N/A	0.001	0.008	N/A	Pass
39	0.000	0.005	N/A	0.000	0.008	N/A	Pass

LLX-Panel-60120-60W-CCT
Class C

V_RMS (Volts)	: 230.0	Frequency (Hz)	: 50.0
I_Peak (Amps)	: 0.408	I_RMS (Amps)	: 0.250
I_Fund (Amps)	: 0.248	Crest Factor	: 1.632
Power (Watts)	: 56.4	Power Factor	: 0.981

Harm#	Harms (avg)	100% Limit	%of Limit	Harms (max)	150% Limit	%of Limit	Status
2	0.001	0.003	N/A	0.001	0.004	N/A	Pass
3	0.017	0.068	25	0.020	0.102	20	Pass
5	0.001	0.014	N/A	0.005	0.021	N/A	Pass
7	0.004	0.010	N/A	0.004	0.015	N/A	Pass
9	0.001	0.007	N/A	0.003	0.011	N/A	Pass
11	0.001	0.004	N/A	0.002	0.006	N/A	Pass
13	0.001	0.004	N/A	0.001	0.006	N/A	Pass
15	0.001	0.004	N/A	0.001	0.006	N/A	Pass
17	0.001	0.004	N/A	0.001	0.006	N/A	Pass
19	0.000	0.004	N/A	0.000	0.006	N/A	Pass
21	0.001	0.004	N/A	0.001	0.006	N/A	Pass
23	0.001	0.004	N/A	0.001	0.006	N/A	Pass
25	0.001	0.004	N/A	0.001	0.006	N/A	Pass
27	0.001	0.004	N/A	0.001	0.006	N/A	Pass
29	0.000	0.004	N/A	0.000	0.006	N/A	Pass
31	0.001	0.004	N/A	0.001	0.006	N/A	Pass
33	0.000	0.004	N/A	0.000	0.006	N/A	Pass
35	0.001	0.004	N/A	0.001	0.006	N/A	Pass
37	0.001	0.004	N/A	0.001	0.006	N/A	Pass
39	0.000	0.004	N/A	0.000	0.006	N/A	Pass

.4 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.


Measurement uncertainty of harmonic test is: ± 3.03%

The measurement uncertainty is given with a confidence of 95%, k=2.

8. Voltage Fluctuations-Flicker

Test result: **PASS**

8.1 Block Diagram of Test Setup



8.2 Test Setup and Test Procedure

8.2.1 Definition

Flicker: impression of unsteadiness of visual sensation induced by a light stimulus whose luminance or spectral distribution fluctuates with time.

Pst: Short-term flicker severity.

Plt: long-term flicker severity.

dc: maximum steady state voltage change during an observation period.

dmax: maximum absolute voltage change during an observation period.

d(t): time function of the relative r.m.s. voltage change evaluated as a single value for each successive half period between zero-crossings of the source voltage, except during time interval in which the voltage is a steady-state condition for at least 1s.

8.2.2 Test condition

The EUT was set to produce the most unfavorable sequence of voltage changes.

8.3 Test Protocol

The tested object operated under the operating condition specified in EN 61000-3-3
The following limits apply

- the value of Pst shall not be greater than 1,0.
- the value of Plt shall not be greater than 0,65.
- Tmax, the accumulated time value of d(t) with a deviation exceeding 3,3 % during a single voltage change at the EUT terminals, shall not exceed 500 ms.
- the maximum relative steady-state voltage change, dc, shall not exceed 3,3 %.
- the maximum relative voltage change dmax, shall not exceed:

☐ 4% without additional conditions.

☐ 6 % for equipment which is:
– switched manually, or
– switched automatically more frequently than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption.

☐ 7 % for equipment which is:
– attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as lawn mowers, portable tools such as electric drills), or
– switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.

☐ for manual switch, dmax is measured in accordance with Annex B of standard, average dmax is calculated from 24 times measurement.

☒According to EN 61000-3-3 clause 6.1 & A.2, the EUT is either unlikely to produce significant voltage fluctuations/flicker or no limit and test were required by technical analysis and sample evaluation on the product.

Temperature : °C

Relative Humidity : %

8.4 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.
Measurement uncertainty of voltage fluctuation and flicker is: ± 11.77%.
The measurement uncertainty is given with a confidence of 95%, k=2.

Immunity Test

Performance criteria

The performance criteria are based on the general criteria of the standard and derived from the product specification

Performance criterion A:
During the test, no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.

Performance criterion B:
During the test the luminous intensity may change to any value. After the test, the luminous intensity shall be restored to its initial value within 1 min. Regulating controls need not function during the test, but after the test, the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.

Performance criterion C:
During and after the test, any change of the luminous intensity is allowed and the lamp(s) may be extinguished. After the test, within 30 min, all functions shall return to normal, if necessary by temporary interruption of the mains supply and/or operating the regulating control.
Additional requirement for lighting equipment incorporating a starting device: After the test, the lighting equipment is switched off. After half an hour it is switched on again. The lighting equipment shall start and operate as intended.

Basic EMC standard for immunity test
IEC 61000-4-2:2008: Electromagnetic Compatibility (EMC) – Part 4- 2: testing and measurement techniques – electrostatic discharge immunity test

IEC 61000-4-3: 2006/+A1:2007: Electromagnetic Compatibility (EMC) – Part 4- 3: testing and measurement techniques – radiated, radio frequency, electromagnetic field immunity test

IEC 61000-4-4:2004: Electromagnetic Compatibility (EMC) – Part 4- 4: testing and measurement techniques – electric fast transient/burst immunity test

IEC 61000-4-5:2005: Electromagnetic Compatibility (EMC) – Part 4- 5: testing and measurement techniques – section 5: surge immunity test

IEC 61000-4-6:2008: Electromagnetic Compatibility (EMC) – Part 4- 6: testing and measurement techniques – section 6: immunity to conducted disturbance, induced by radio frequency field

IEC 61000-4-8:1993/+A1:2000: Electromagnetic compatibility (EMC) — Part 4-8: Testing and measurement techniques —Power frequency magnetic field immunity test.

IEC 61000-4-11:2004: Electromagnetic Compatibility (EMC) – Part 4- 11: testing and measurement techniques –voltage dips, short interruption and voltage variations immunity test

Note: there are no magnetic sensitive components included in this EUT and magnetic field immunity test according to EN 61000-4-8 is therefore not required.

9. Electrostatic Discharge (ESD)

Test result: **PASS**

9.1 Severity Level and Performance Criterion

9.1.1 Test level


1a – Contact discharge		1b – Air discharge	
Level	Test voltage kV	Level	Test voltage kV
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15
X	Special	X	Special
Notes: 1."X" is an open level. The level has to be specified in the dedicated equipment specification. If higher voltages than those shown are specified, special test equipment may be needed. 2. The gray rows were the selected test level.			

9.1.2 Performance Criterion

Performance criterion: **B (**For emergency luminaires designed to operate in high-risk task areas, after the test, the luminous intensity shall be restored to its initial value within 0.5s.)

9.2 Block Diagram of Test Setup


☒ For table-top equipment

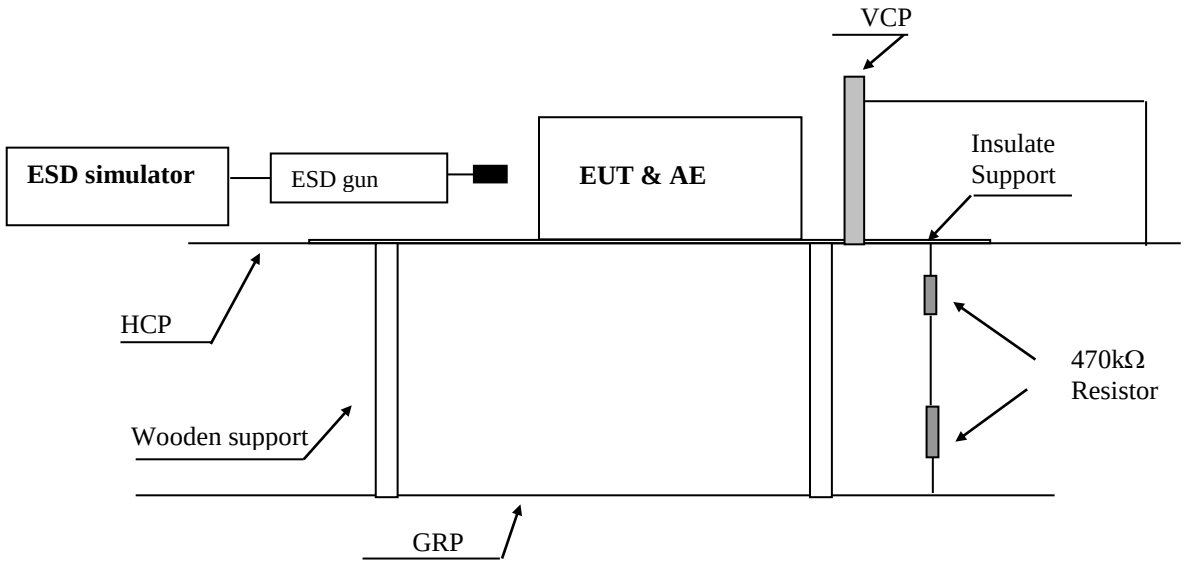

Note: HCP means Horizontal Coupling Plane

VCP means Vertical Coupling Plane
GRP means Ground Reference Plane
Wooden support is a 0.8m height table

☐ For floor standing equipment

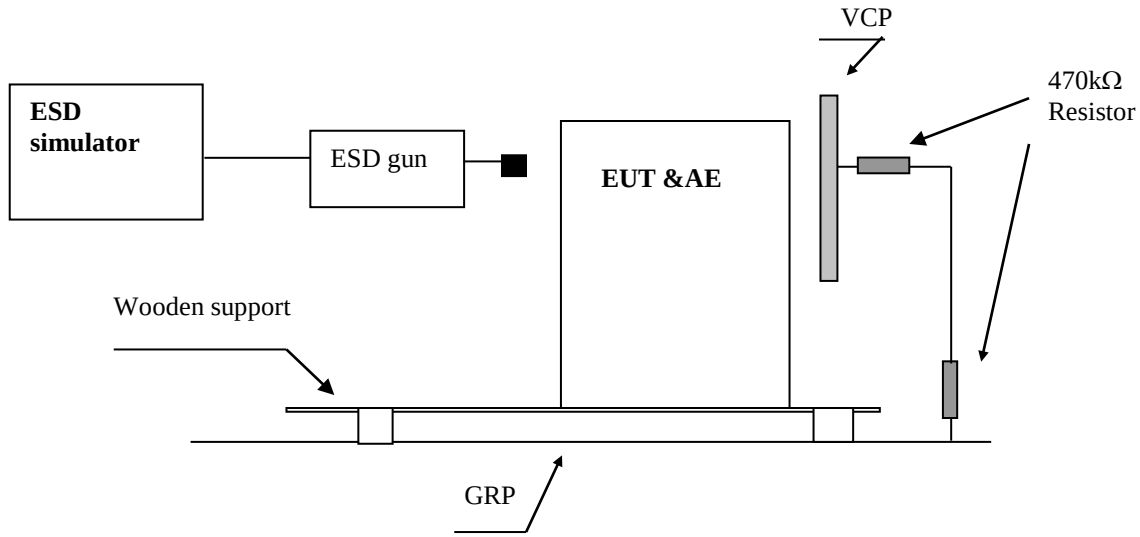

Note: VCP means Vertical Coupling Plane
GRP means Ground Reference Plane
Wooden support is a 0.1m height rack

9.3 Test Setup and Test Procedure

Measurement was performed in shielded room.
Measurement and setting of EUT was applied according to clause 7 of IEC 61000-4-2.
The test method and equipment was specified by IEC 61000-4-2 with the modifications by clause 5.2 of EN IEC 61547.

9.4 Test Protocol

Temperature : 23°C
Relative Humidity: 52%
Air Pressure: 100.5kPa

Direct discharges were applied at the following selected points:

Test point #	Test level [kV]	Air/ Contact	Polarity (+/-)	Result	Comment
A	2/4	Contact	+/-	Pass	All touchable screws of enclosure
B	2/4	Contact	+/-	Pass	Accessible metal parts of the EUT
C	2/4/8	Air	+/-	Pass	Air gap of the switch, button

D	2/4/8	Air	+/-	Pass	The air in-taking opening
E	2/4/8	Air	+/-	Pass	Slots around the EUT

Indirect contact discharges were applied to the VCP and the HCP at the following selected points:

☒ For table top equipment

Point	Description	Point	Result
HCP f	0,1m from the front of the EUT	Edge of centre, corner on HCP	Pass
HCP b	0,1m from the back of the EUT	Edge of centre, corner on HCP	Pass
HCP r	0,1m from the right side of the EUT	Edge of centre, corner on HCP	Pass
HCP l	0,1m from the left side of the EUT	Edge of centre, corner on HCP	Pass
VCP f	0,1m from the front of the EUT	Edge of centre, corner on VCP	Pass
VCP b	0,1m from the back of the EUT	Edge of centre, corner on VCP	Pass
VCP r	0,1m from the right of the EUT	Edge of centre, corner on VCP	Pass
VCP l	0,1m from the left of the EUT	Edge of centre, corner on VCP	Pass

☐ For floor standing equipment

Point	Description	Point	Result
VCP f	0,1m from the front of the EUT	Edge of centre, corner on VCP	-
VCP b	0,1m from the back of the EUT	Edge of centre, corner on VCP	-
VCP r	0,1m from the right of the EUT	Edge of centre, corner on VCP	-
VCP l	0,1m from the left of the EUT	Edge of centre, corner on VCP	-

Observation: All the functions were operated as normal during and after test.
Conclusion: The EUT met the requirements of the standard.

9.5 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.
Measurement uncertainty of ESD test is: ± 6.65%
The measurement uncertainty is given with a confidence of 95%, k=2.

9.6 Additions, Deviations and Exclusions from Standards

None.

10. Electromagnetic field susceptibility

Test result: **PASS**

10.1 Severity Level and Performance Criterion

10.1.1 Test level


Level	Test field strength V/m
1	1
2	3
3	10
X	Special

Notes:
1. X is an open test level. This level may be given in the product specification.
2. The gray row is the selected test level.

10.1.2 Performance Criterion

Performance criterion: **A**

10.2 Block diagram of test setup

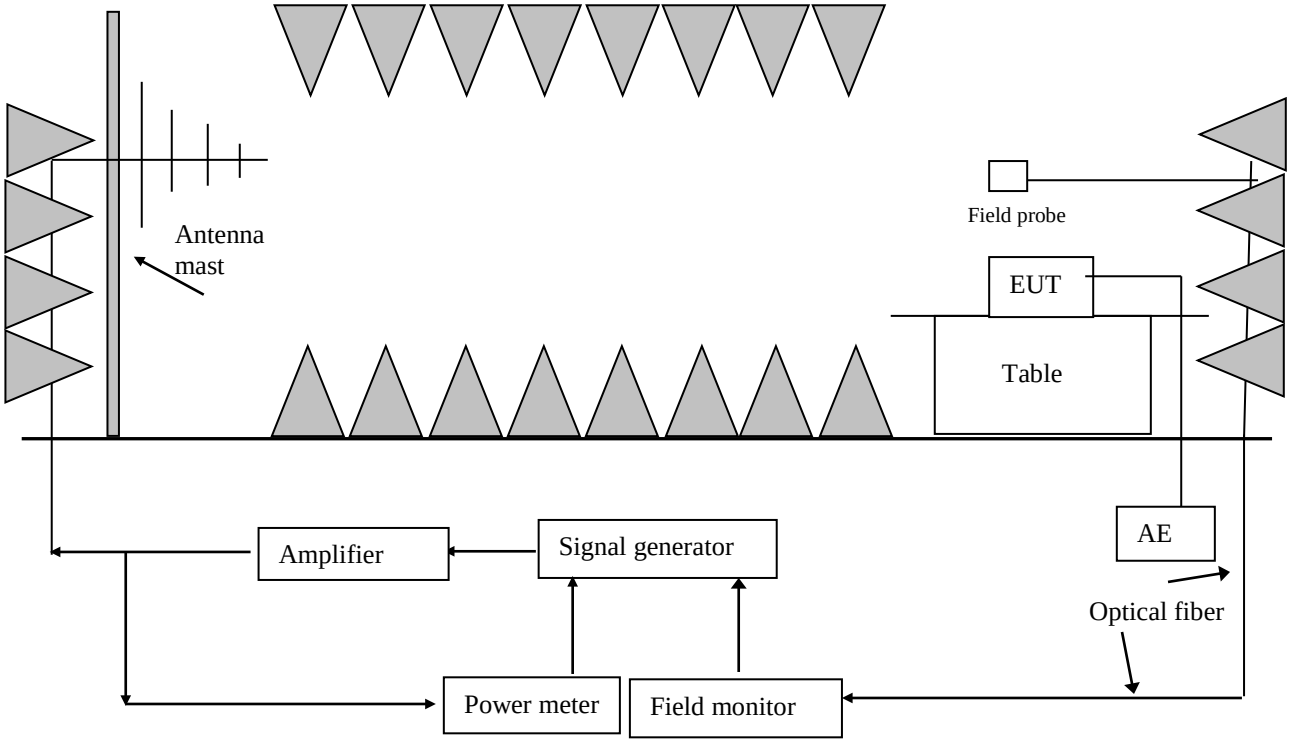

10.3 Test Setup and Test Procedure

Measurement was performed in full-anechoic chamber.
Measurement and setting of EUT was applied according to clause 7 of IEC 61000-4-3.
The test method and equipment was specified by IEC 61000-4-3 with additions and modifications by clause 5.3 of EN IEC 61547.

10.4 Test Protocol

Temperature : 24°C
Relative Humidity: 48%

Test no.:	Frequency (MHz)	Polarization	Test level V/m	Modulation	Exposed location	Result	Comment
1	80-1000	H & V	3	1kHz, 80%, SW, AM, 1% step size	All sides	Pass	-

Observation: All the functions were operated as normal during and after test.
Conclusion: The EUT met the requirements of standard.

10.5 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.
Measurement uncertainty of radiated susceptibility test is: ± 2.38dB
The measurement uncertainty is given with a confidence of 95%, k=2.

10.6 Additions, deviations and exclusions from standards

None.

11. Electric Fast Transient/Burst Immunity Test

Test result: **PASS**

11.1 Severity Level and Performance Criterion

11.1.1 Test level

Open circuit output test voltage (±10%) and repetition rate of the impulses (±20%)				
Level	On power supply ports PE		On I/O (input & output) signal, data and control ports	
	Voltage peak kV	Repetition rate kHz	Voltage peak kV	Repetition rate kHz
1	0.5	5 or 100	0.25	5 or 100
2	1	5 or 100	0.5	5 or 100
3	2	5 or 100	1	5 or 100
4	4	5 or 100	2	5 or 100
X	Special	Special	Special	Special
Notes : 1. “X” is an open level. The level has to be specified in the dedicated equipment specification. 2. The gray rows were the selected test level.				


11.1.2 Performance Criterion

Performance criterion **B (**For emergency luminaires designed to operate in high-risk task areas, after the test, the luminous intensity shall be restored to its initial value within 0.5s.)


11.2 Block Diagram of Test Setup

11.2.1 Block Diagram for input a.c./d.c. power line

☒ For table-top equipment

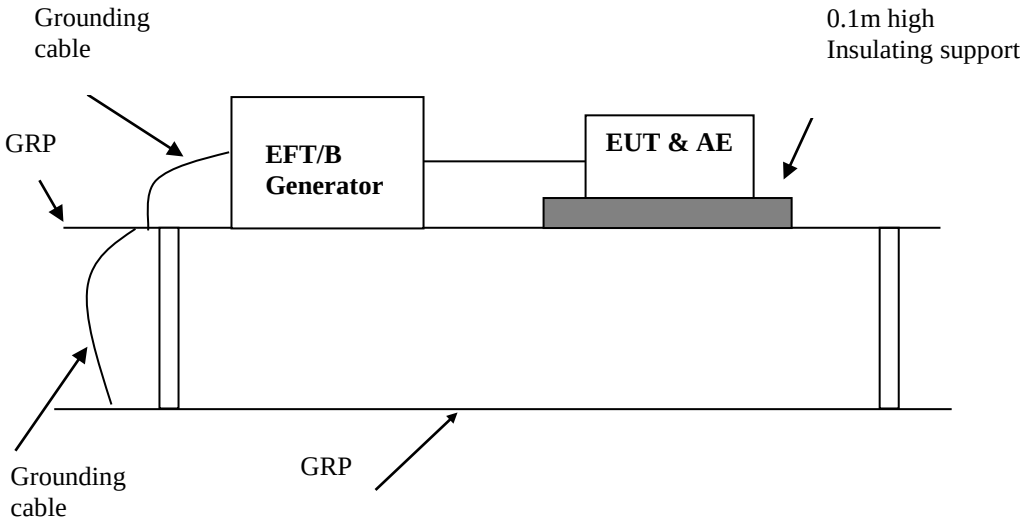


☐ For floor standing equipment

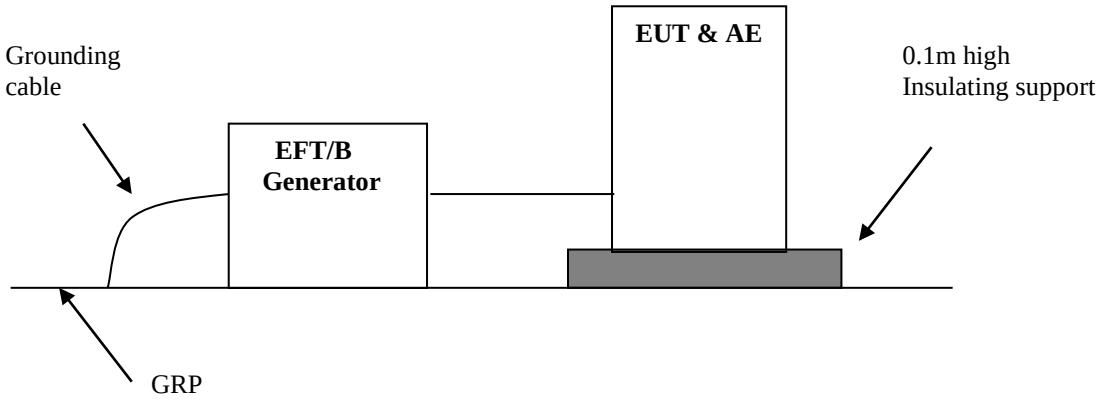


11.2.2 Block Diagram for output a.c./d.c. power line or signal/control lines

☐ For table-top equipment

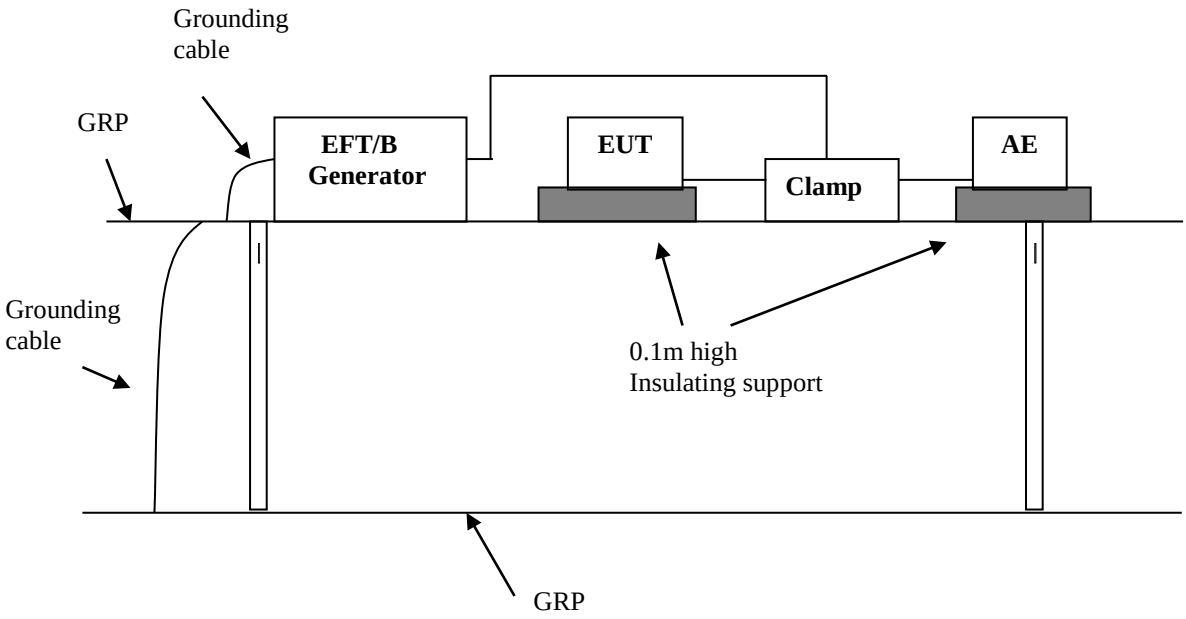

☐ For floor standing equipment

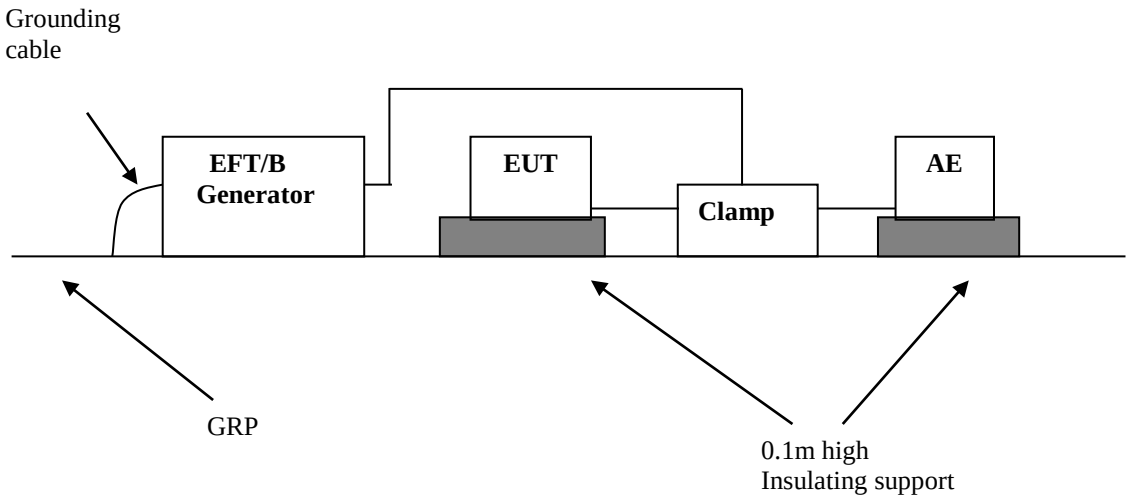

11.3 Test Setup and Test Procedure

Measurement was performed in shielded room.

Measurement and setting of EUT was applied according to clause 7 of IEC 61000-4-4.

The test method and equipment was specified by IEC 61000-4-4 with additions and modifications by clause 5.5 of EN IEC 61547.

11.4 Test Protocol

Temperature : 24°C
Relative Humidity: 48%

Test No.	Level [kV]	Polarity +/-	Repetition rate kHz	Line for test	Pass/ Fail
1	0.5	+/-	5	Signal lines and control lines	Pass
2	0.5	+/-	5	d.c. power ports	NA
3	1	+/-	5	a.c. power ports	Pass
Notes: “NA” means not applicable.					

Observation: All the functions were operated as normal during and after test.
Conclusion: The EUT met the requirements of the standard.

11.5 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.
Measurement uncertainty of EFT test at main terminal is: ± 18.33%
Measurement uncertainty of EFT test at signal/telecom terminal is: ± 18.36%
The measurement uncertainty is given with a confidence of 95%, k=2.

11.6 Additions, Deviations and Exclusions from Standards

None.

12. Surge Immunity Test

Test result: **PASS**

12.1 Severity Level and Performance Criterion

12.1.1 Test level

Level	Open-circuit test voltage ±10% kV
1	0.5
2	1.0
3	2.0
4	4.0
X*	Special

Notes:
1."X" is an open class. This level can be specified in the product Specification
2. The gray rows are the selected level.


12.1.2 Performance Criterion

Performance criterion **B:** Luminaires for emergency lighting**. (**For emergency luminaires designed to operate in high-risk task areas, after the test, the luminous intensity shall be restored to its initial value within 0.5s.)

Performance criterion **C:** Others

12.2 Block Diagram of Test Setup

12.2.1 Block Diagram for input a.c. power line

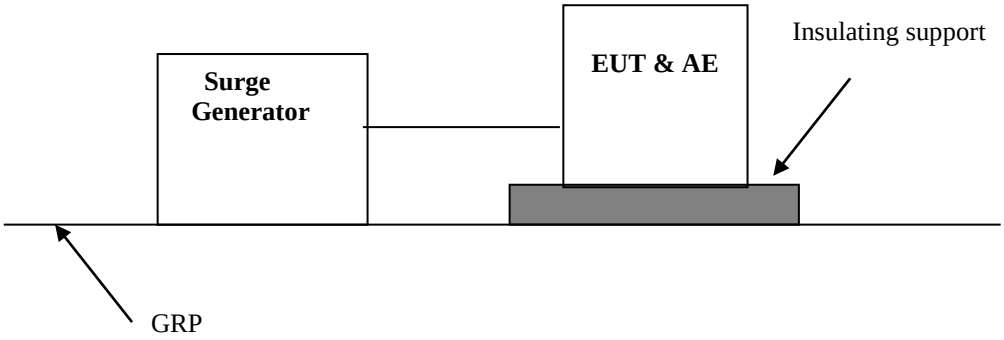

12.3 Test Setup and Test Procedure

Measurement was performed in shielded room.
Measurement and setting of EUT was applied according to clause 7 of IEC 61000-4-5.
The test method and equipment was specified by IEC 61000-4-5 with modifications by clause 5.7 of EN IEC 61547.

12.4 Test Protocol

Temperature : 25°C
Relative Humidity: 51%

Test No.	Level [kV]	Polarity +/-	Angle	Line for test	Pass/ Fail
1	0.5	+	90º	a.c. Mains (line to line)	Pass
2	0.5	-	270º	a.c. Mains (line to line)	Pass
3	1	+	90º	a.c. Mains (line to earth)	NA
4	1	-	270º	a.c. Mains (line to earth)	NA
5	1	+	90º	a.c. Mains (line to line)	Pass
6	1	-	270º	a.c. Mains (line to line)	Pass
7	2	+	90º	a.c. Mains (line to earth)	NA
8	2	-	270º	a.c. Mains (line to earth)	NA
Notes: 1. “NA” means not applicable.					

Observation: During test, the light has some flashing. Once the interference is removed, it recovered its normal mode.

Conclusion: The EUT met the requirements of the standard.

12.5 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of surge test at main terminal is: ±11.57%.

The measurement uncertainty is given with a confidence of 95%, k=2.

12.6 Additions, Deviations and Exclusions from Standards

None.

13. Immunity to Conducted Disturbances, Induced by Radio-frequency Fields

Test result: **PASS**

13.1 Severity Level and Performance Criterion

13.1.1 Test level

Frequency range 150kHz – 80MHz		
Level	Voltage level (e.m.f.) U_0 [dB(uV)]	U_0 (V)
1	120	1
2	130	3
3	140	10
X	Special	Special
Notes: 1. “X” is an open level. 2. The gray row is the selected test level.		


13.1.2 Performance Criterion

Performance criterion **A**

13.2 Block Diagram of Test Setup


13.2.1 Block Diagram for a.c./d.c input power line

☒ Block Diagram for a.c./d.c input power line

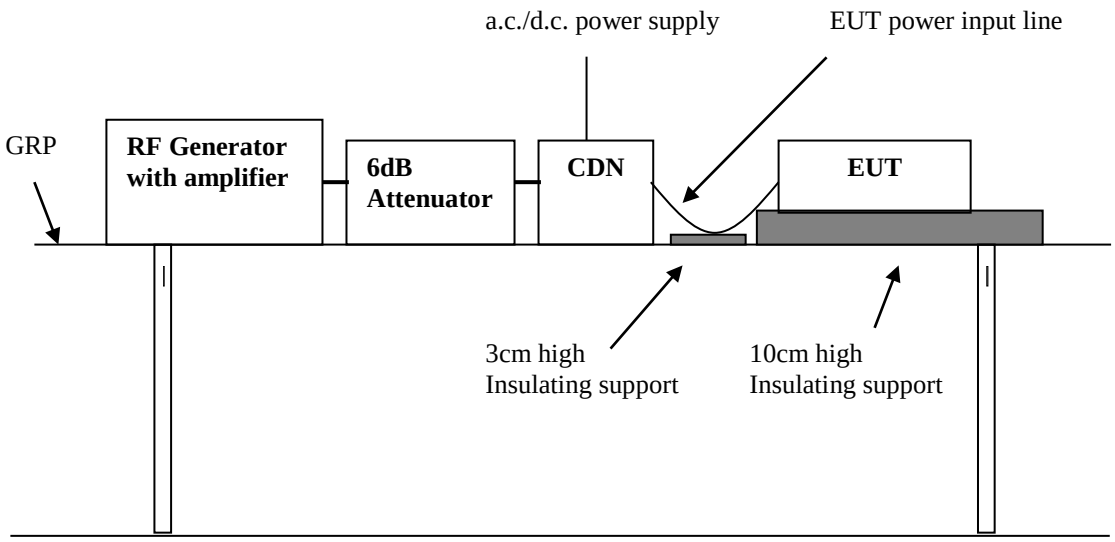


13.2.2 Block Diagram for output a.c./d.c. power line or signal/control lines

☐ Unshielded line

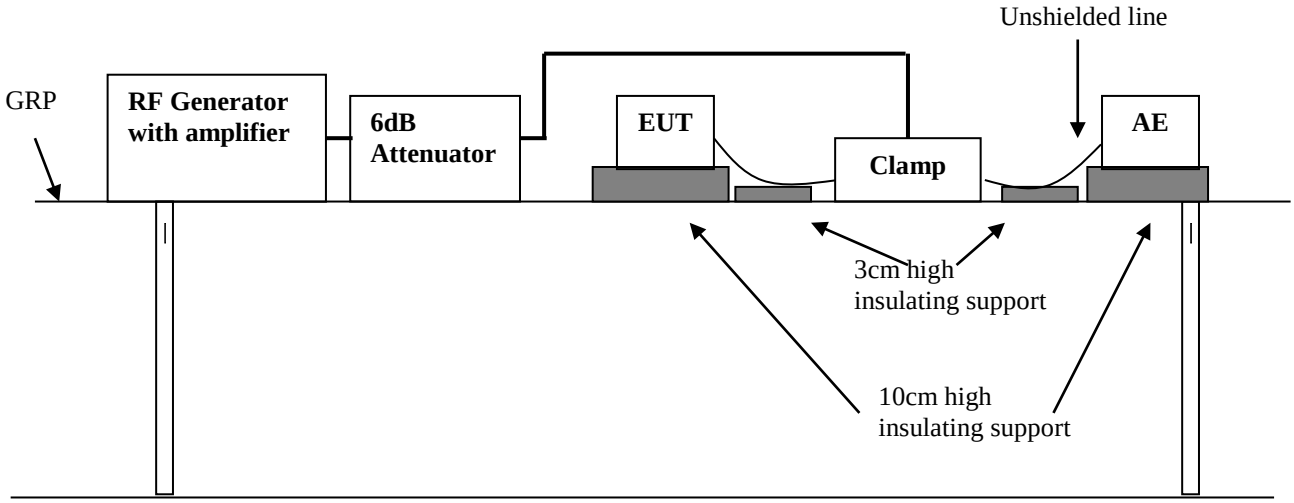

☐ Shielded line

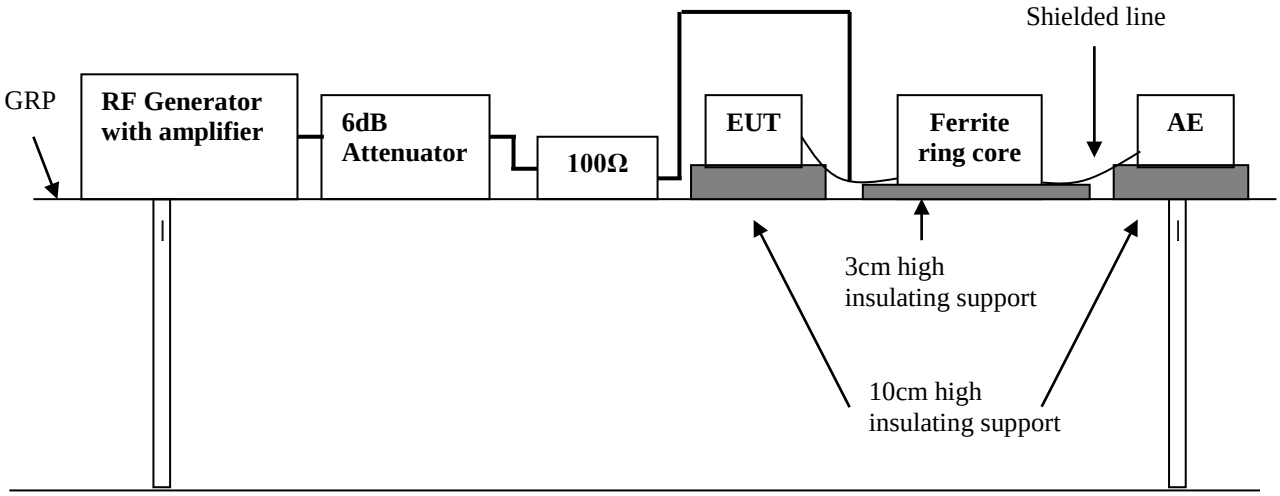

13.3 Test Setup and Test Procedure

Measurement was performed in shielded room.
Measurement and setting of EUT was applied according to clause 7 of IEC 61000-4-6.
The test method and equipment was specified by IEC 61000-4-6 with additions and modifications by clause 5.6 of EN IEC 61547.

13.4 Test Protocol

Temperature : 25°C
Relative Humidity: 51%

Test No.	Frequency (MHz)	Level V (r.m.s.)	Modulation	Injected point	Result
1	0.15~80	3	1kHz, 80%, SW, AM, 1% step size	a.c. Mains	Pass
2	0.15~80	1	1kHz, 80%, SW, AM, 1% step size	d.c. power ports	-
3	0.15~80	1	1kHz, 80%, SW, AM, 1% step size	signal lines and control lines	-
Note: "NA" means not applicable.					

Observation: All the functions were operated as normal during and after test.
Conclusion: The EUT met the requirements of the standard.

13.5 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.
Measurement uncertainty of injected current test at main terminal is ± 2.59dB.
Measurement uncertainty of injected current test at unshielded signal terminal is ± 3.01dB.
Measurement uncertainty of injected current test at shielded signal terminal is under consideration.
The measurement uncertainty is given with a confidence of 95%, k=2.

13.6 Additions, Deviations and Exclusions from Standards

None.

14. Voltage Dips, Short Interruptions and Voltage Variations Immunity Test

Test result: **PASS**

☐ As luminaire for emergency lighting, these tests do not apply as they are covered by the test in IEC 60598-2-22.

14.1 Severity Level and Performance Criterion

14.1.1 Test level

Test level % U_T	Voltage dip and short interruptions % U_T	Duration (in period)
0	100	0.5*
		250
40	60	25
		10
70	30	0.5
		10
		X **

Notes:

1.“*” for 0.5 period, the test shall be made in positive and negative polarity, i.e. starting at 0° and 180°, respectively.

2. “**” means “x” is an open duration. This duration can be given in the product specification. Utilities in Europe have measured dips and short interruptions of duration between ½ a period and 3000 periods, but duration less than 50 periods are most common.

3. If the EUT is tested for voltage dips of 100%, it is generally unnecessary to test for other levels for the same durations. However, for some cases (safeguard systems or electro-mechanical devices) it is not true. The product specification or product committee shall give an indication of the applicability of this note.


4. The gray rows are selected test level.

14.1.2 Performance Criterion

Performance criterion C at the test level 70%.

Performance criterion B at the test level 0%. (For ballasts where the lamp is not able to restart within 1 min, due to the physical constrains of the lamp performance criterion C applies. For luminaires where the lamp is not able to restart within 1 min, due to the physical constraints of the lamp, performance criterion C applies.)

14.2 Block diagram of test setup

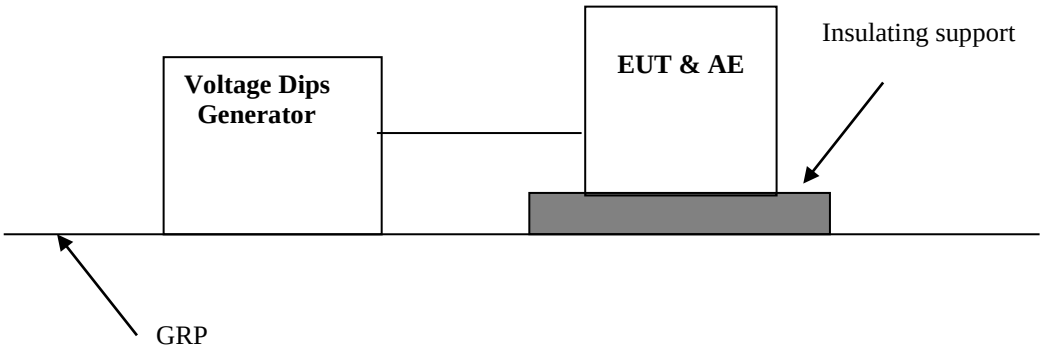

14.3 Test Setup and Test Procedure

Measurement was performed in shielded room.
Measurement and setting of EUT was applied according to clause 7 of IEC 61000-4-11.
The test method and equipment was specified by IEC 61000-4-11 with additions and modifications by clause 5.8 of EN IEC 61547.

14.4 Test Protocol

Temperature : 25 °C
Relative Humidity: 51 %

Test no.	Test level % U_T	Voltage dip and short interruptions % U_T	Duration (in periods)	Result	Comment
1	70	30%	10 cycles	Pass	-
2	0	100% pos half cycle	0,5 cycle	Pass	-
3	0	100% neg half cycle	0,5 cycle	Pass	-

Observation: At test level of 70%, the EUT worked unsteadily. Once the interference is removed, it recovered its normal mode at once.

Conclusion: The EUT met the requirements of the standard.

14.5 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.
Measurement uncertainty of voltage dips and interruption test is: ±11.57%.
The measurement uncertainty is given with a confidence of 95%, k=2.


14.6 Additions, deviations and exclusions from standards

None.


Appendix I: Photograph




Overview for LLX-Panel-6060 series

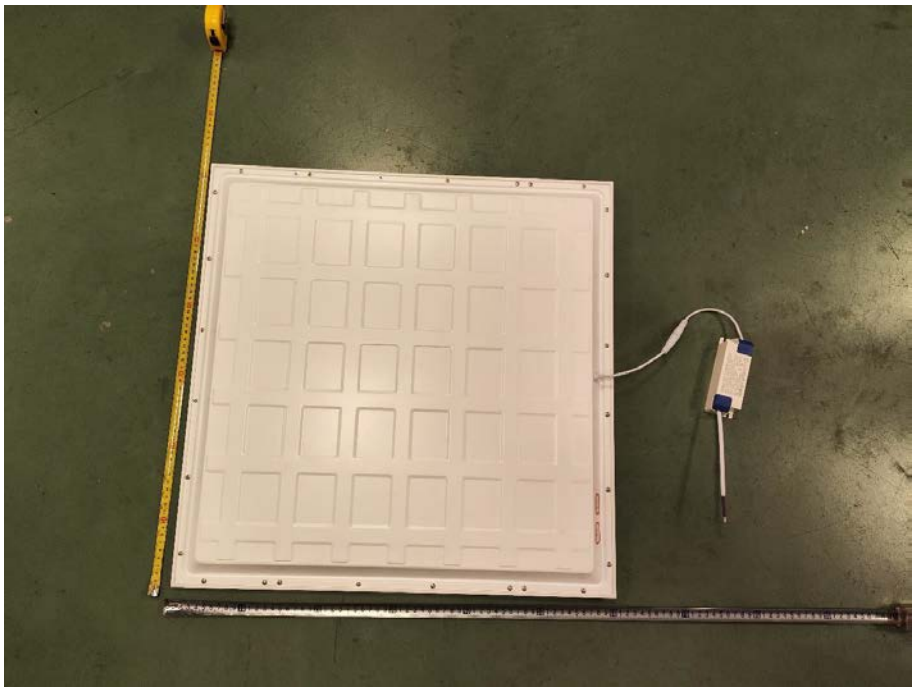

Back view for LLX-Panel-6060 series

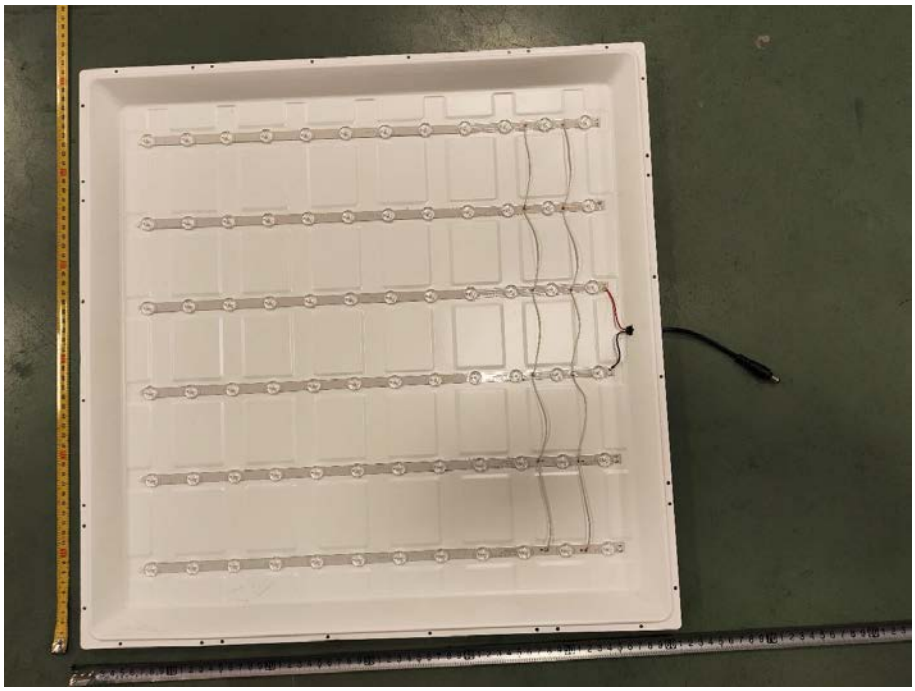

Inside view

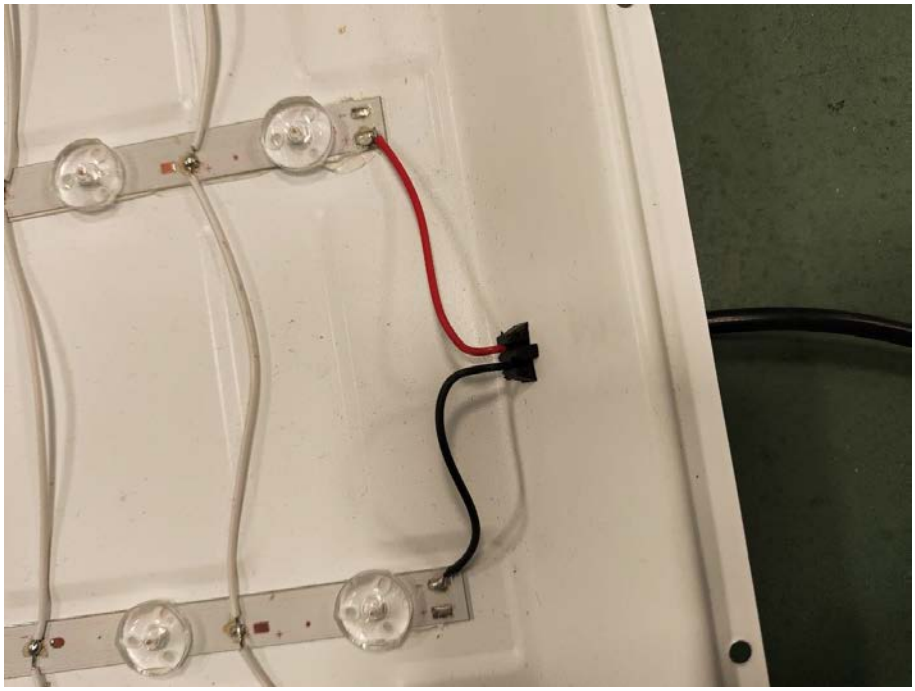

Cord anchorage




Lamp LED module



Suspension kit




Suspension kit for all

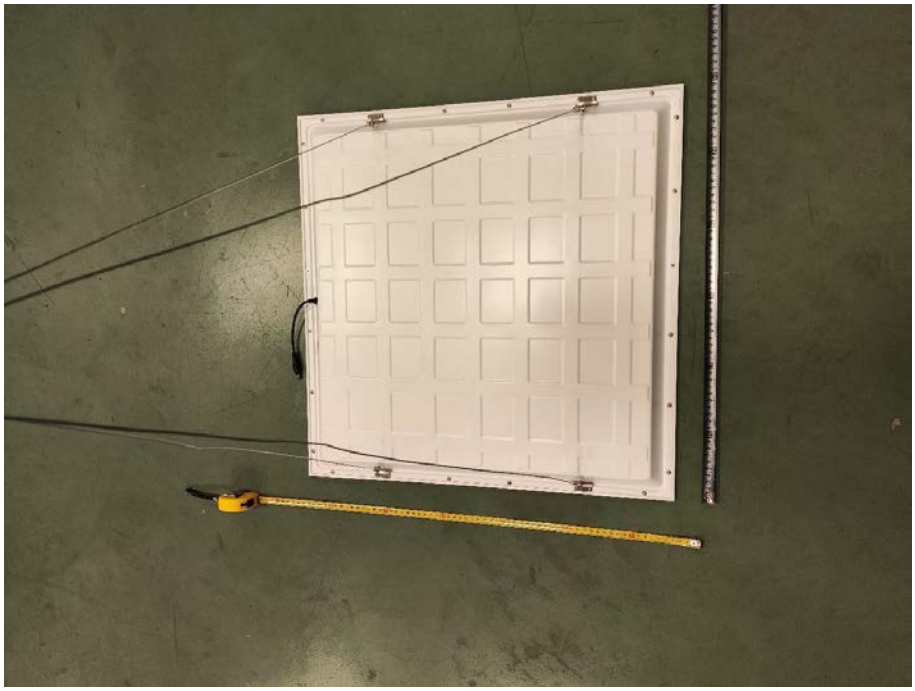


Suspension kit for type model (all other models are the same)




Recessed mount clips for type model (all other models are the same)

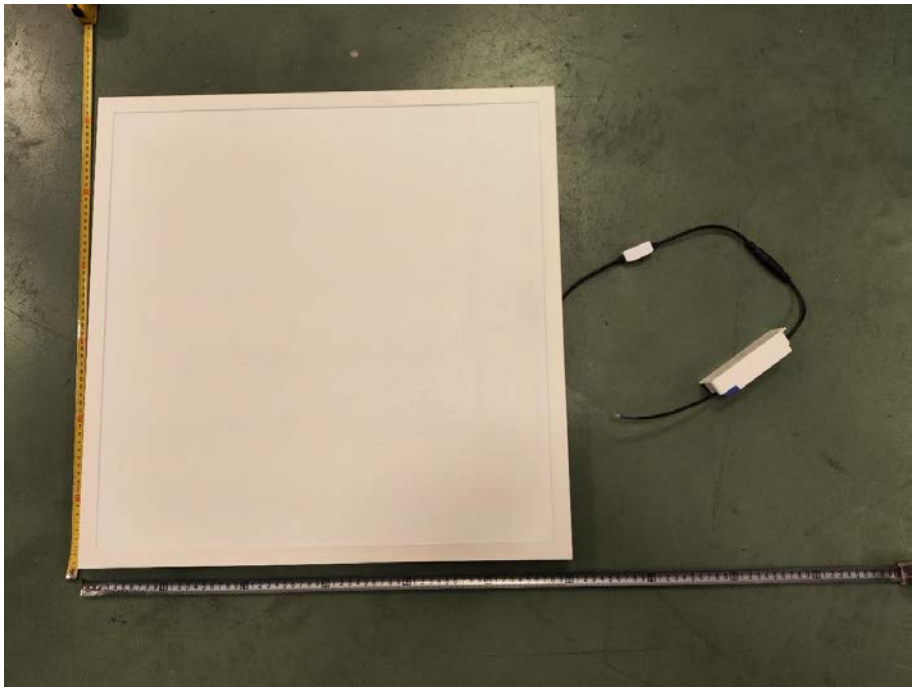


Overview With CCT switch for type model (all other models are the same)

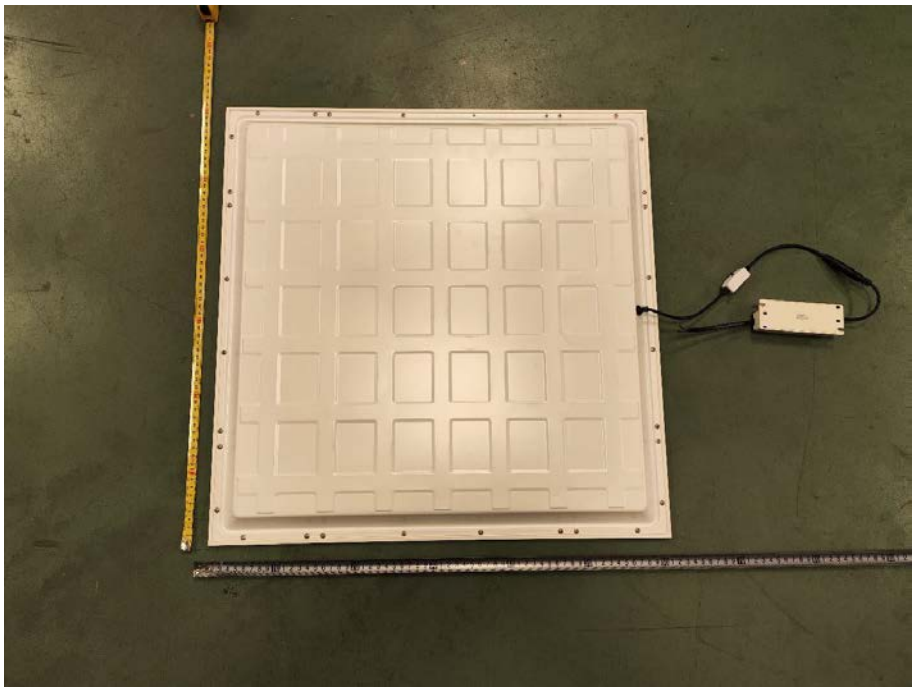

Back view With CCT switch for type model (all other models are the same)

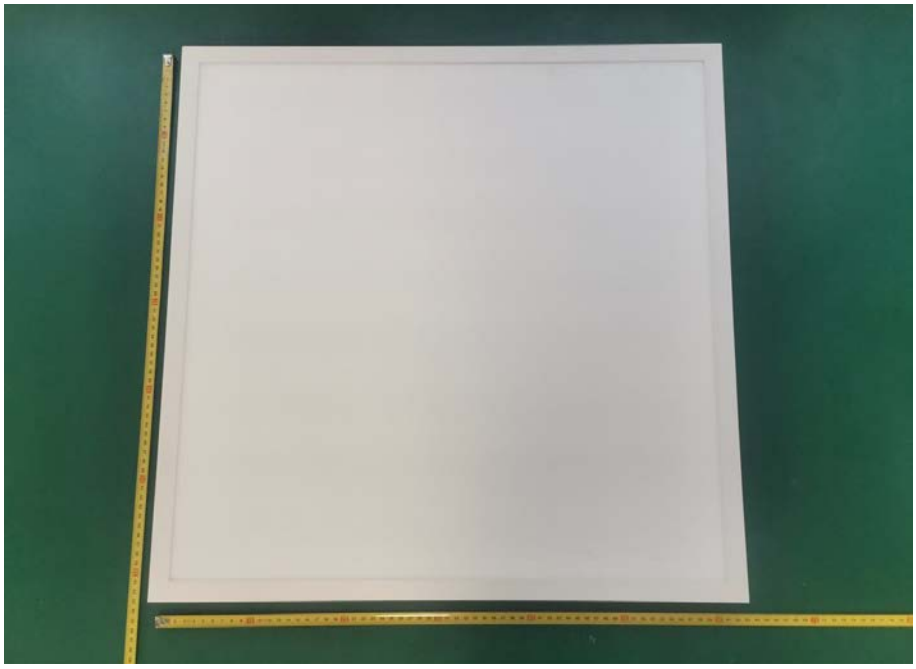


Overview for LLX-Panel-6262 series

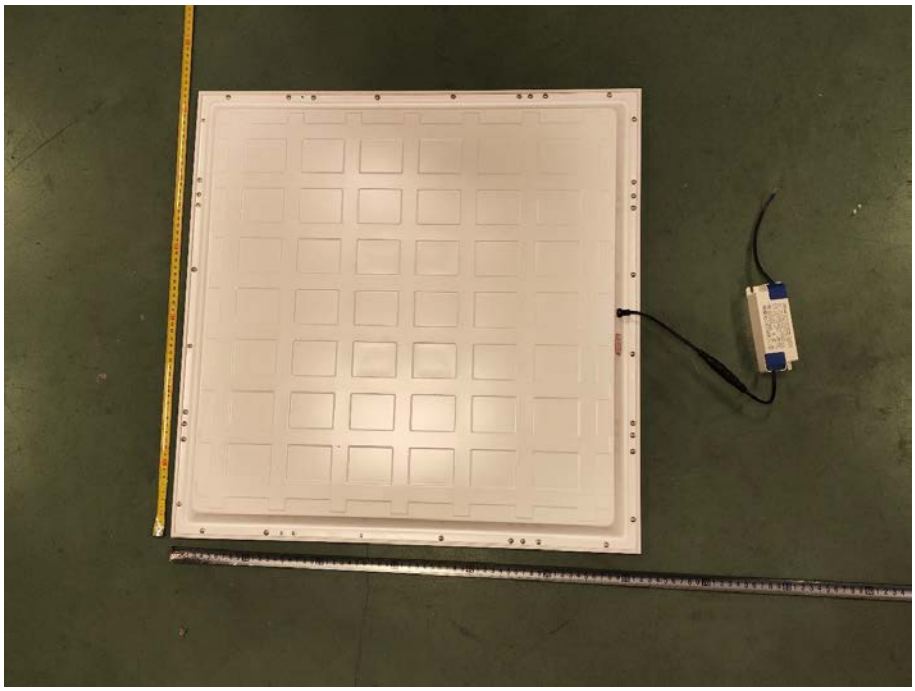

Back view for LLX-Panel-6262 series




Overview for LLX-Panel-60120 series

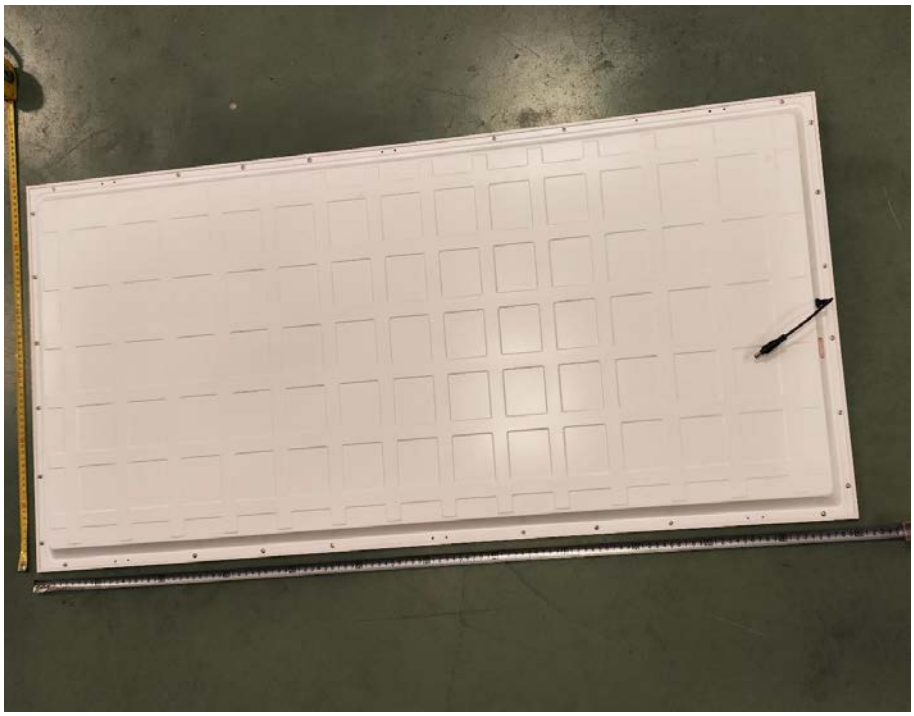

Back view for LLX-Panel-60120 series




Overview for LLX-Panel-30120 series

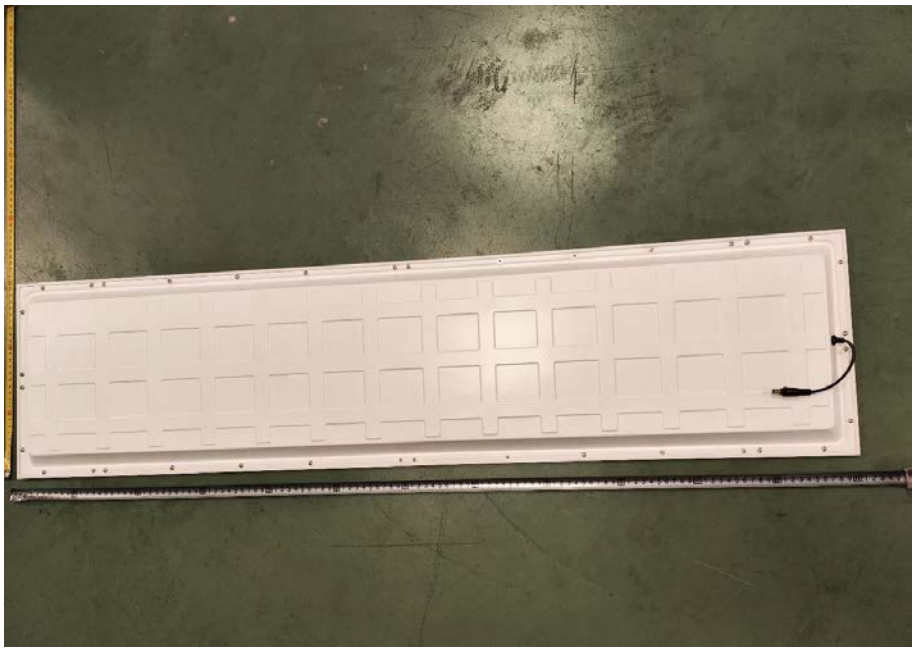


Back view for LLX-Panel-30120 series




Overview for LLX-Panel-3060 series

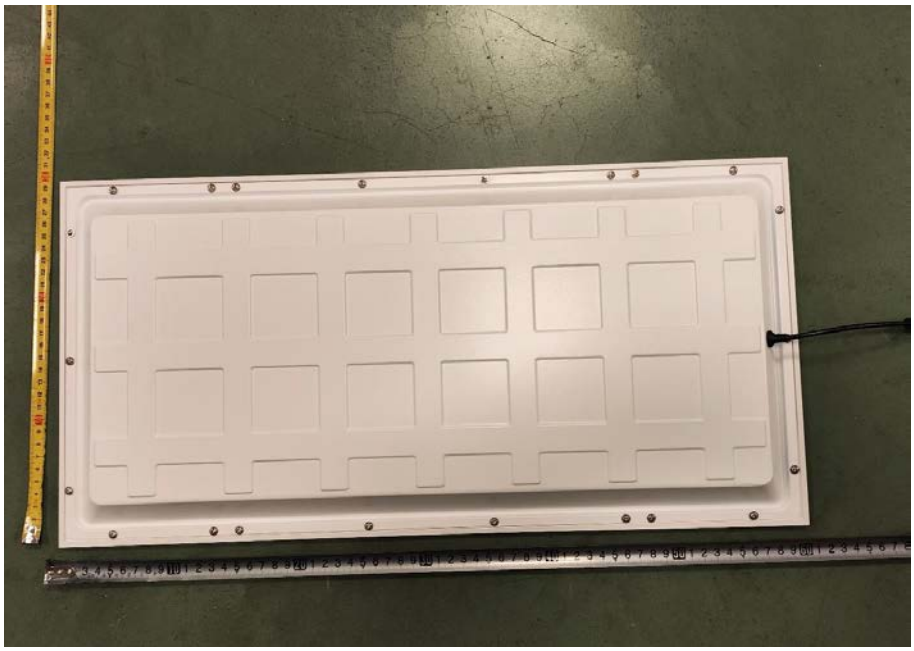

Back view for LLX-Panel-3060 series

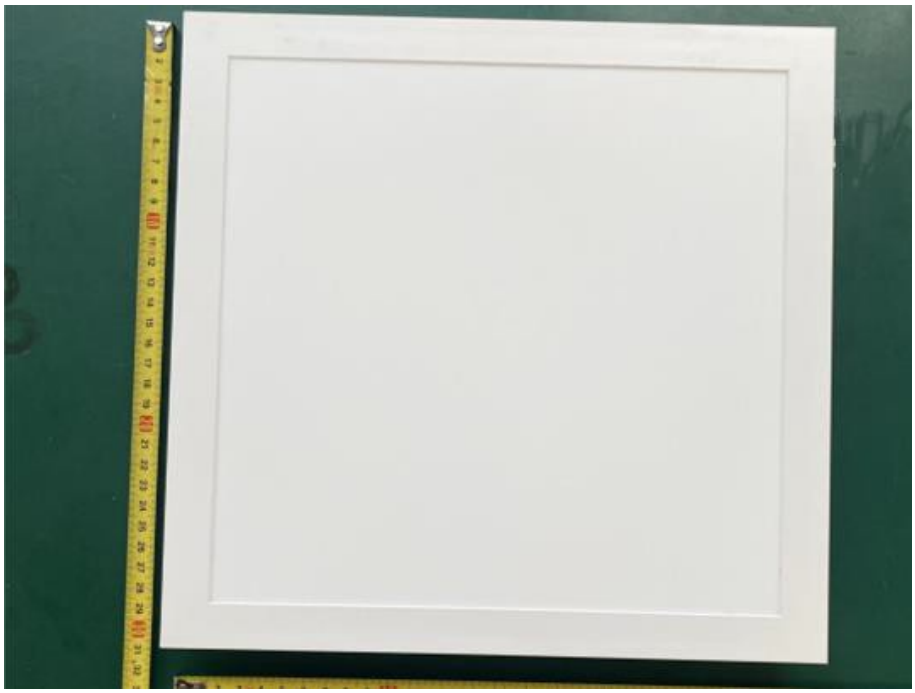

Overview for LLX-Panel-3030 series

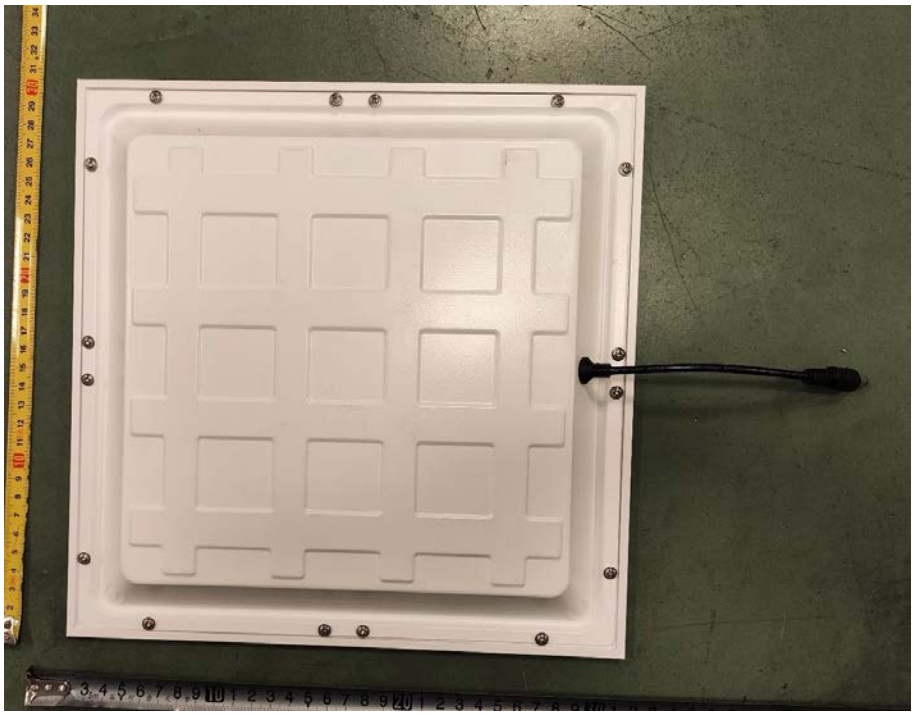

Back view for LLX-Panel-3030 series



CCT Switch and connector for all



LED Driver LF-GIF040YS1050H



LED Driver LF-GIF060YS1500H