LED Down Wall Light Series

LONGLUX



High Performance LED Light

High Performance LED Light


LONGLUX



Features

- Motion sensor and photocell for choice
- Emergency Battery back up unit
- High transmittance PC lens
- Authorised ETL,UL&DLC certificate
- Paniting Finish:Black/Bronze/Customized
- 5 years warranty
- Material:AL+PC
- Suitable Locations:Wet
- Life Time(H):50000H

Dimension

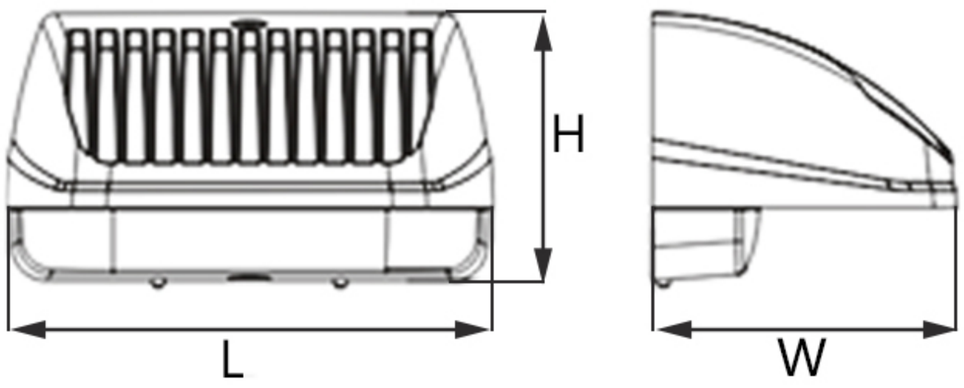



Specification Sheet

Model	Luminous Flux@ 5000K,120°(LM)	Size (MM)	Power (W)	Voltage (V)	Input Frequency(Hz)	CCT(K)	CRI	Super bright chip	Driver	Beam angle
LLX-DWL-15	1350	209*134*122	15	110-277	50/60	4000-5700	70	Cree	Meanwell MOSO Philips Inventronics LONGLUX	110°
LLX-DWL-20	1800	209*134*122	20							
LLX-DWL-24	2160	209*134*122	24							
LLX-DWL-30	2700	257*140*160	30							
LLX-DWL-42	3800	257*140*160	42							
LLX-DWL-60	5700	320*190*253	60							
LLX-DWL-80	7600	320*190*253	80							
LLX-DWL-100	10000	400*205*268	100							
LLX-DWL-120	12000	400*205*268	120							

SUGGESTED METHOD OF INSTALLATION

ALWAYS SWTICH OFF THE MAINS SUPPLY BEFORE INSTALLATION.

STEP 1: Take off mounting plate A from the fitting.(Fig. Ⅰ)


STEP 2: Mount the mounting plate A to the Junction box in the wall. (Fig. Ⅱ)

Place adhesive gasket first if necessary..

STEP 3: Hold the fitting, connect the wires and push the wires back to the junction box in the wall.

Seat the fitting on the mounting plate A and swing down into the place.(Fig Ⅲ)

STEP 4: Tighten the screws to make the fitting secured, apply silicone glue around the fitting where it touch the wall, for better sealing.(Fig. Ⅳ)

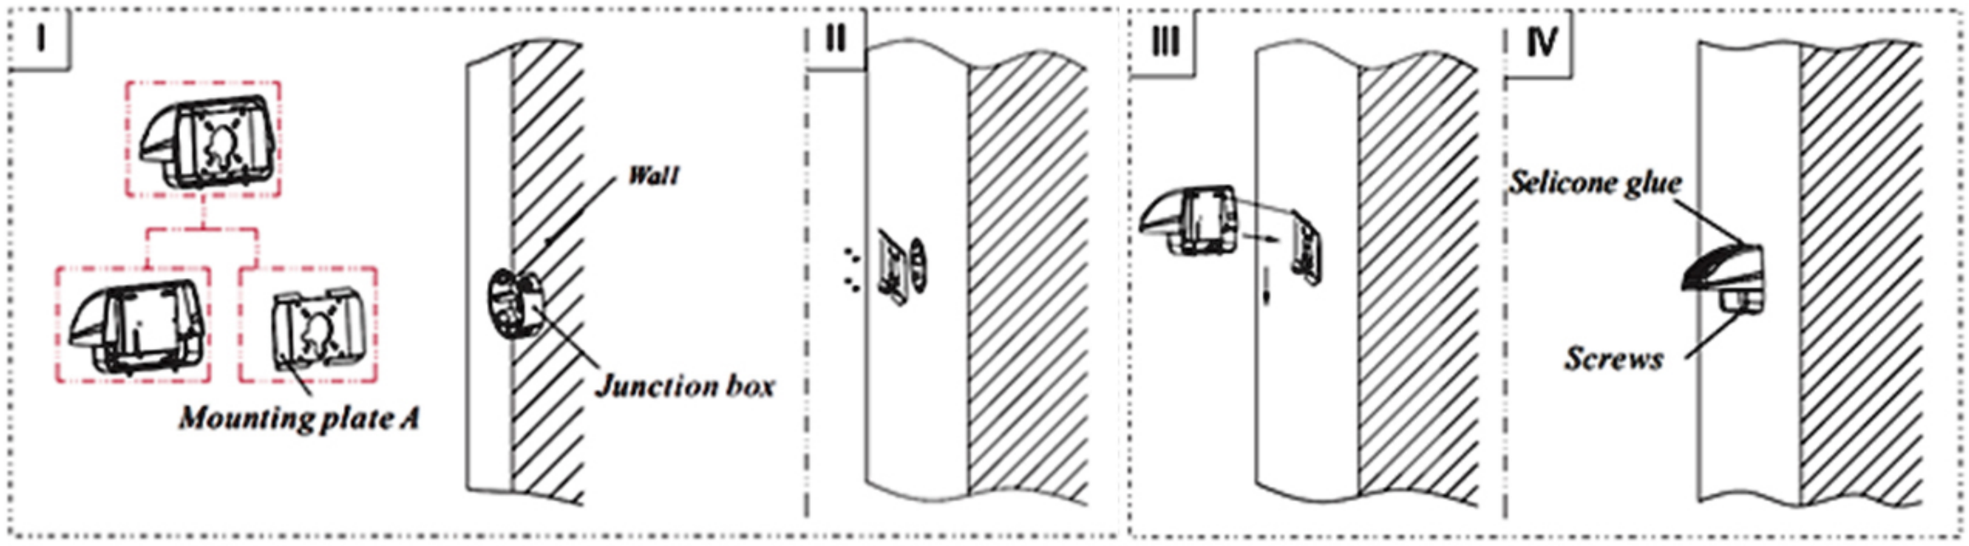

IMPORTANT SAFETY INFORMATION:

- ➤ Input Voltage:AC 100-277V,50/60Hz.
- ➤ Working Temperature: -25℃~ 40℃.
- ➤ This fitting must be wired in accordance with the National Electrical Code and applicable local codes and ordinances.
- ➤ Istallation and servicing this fitting should be performed by qualified electrician only.
- ➤ Before installation or maintenance, turn off electric power and allow the fitting to be cool.
- ➤ Proper grounding is required to insure personal safety. Carefully observe grounding procedure under installation section.
- ➤ Ensure all electrical connections are secure & that there are no loose strands.
- ➤ Install the fitting in a well-ventilated environment, keep away from corrosive/explosive materials, flammable gas or electric dust.
- ➤ Violent shaking or impact should be avoided when the fitting is working.
- ➤ To weather proof your outdoor installation, be sure to seal all holes, conduit plugs with silicone caulking.

WIRING INSTRUCTION OF MAIN CABLE:




black(or brown)line —— connect live wire
white(or blue)line —— connect neutral wire
green(or yellow-green)line —— connect earth wire

⚠ WARNING:

The product must be grounded and installed in accordance with the National Electrical Code and all local codes
Failure to do so may increase the RISH OF PERSONAL INJURY, PROPERTY DAMAGE, FIRE AND DEATH

PACKAGING DATA

1PCS/CTN

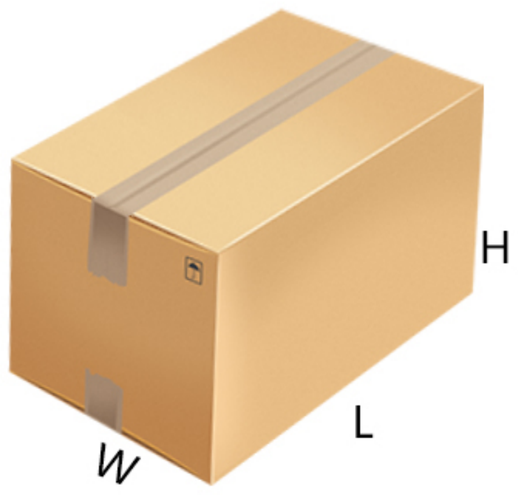

Model No.	Power (W)	Q ty/Ctn	Carton Dim (L*W*H)(MM)	N.W. (Kg/Ctn)	G.W. (Kg/Ctn)
LLX-DWL-15	15	1	237*167*160	1.65	2.1
LLX-DWL-20	20	1	237*167*160	1.65	2.1
LLX-DWL-24	24	1	237*167*160	1.65	2.1
LLX-DWL-30	30	1	295*185*210	2.5	2.7
LLX-DWL-42	42	1	295*185*210	2.5	2.7
LLX-DWL-60	60	1	380*245*315	5.3	6.1
LLX-DWL-80	80	1	380*245*318	5.3	6.1
LLX-DWL-100	100	1	455*260*330	7.0	8
LLX-DWL-120	120	1	455*260*330	7.0	8

Applications:

Parks,courtyards,Public buildings,Shopping malls,Historic Areas etc.





AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period. LONGLUX shall charge against defeats byabnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com