LED Emergency Light

LONGLUX



Features


- Aluminum oxide material, thickened material, durable, quality assurance
- Fault self-check, intelligent automatic fault detection function, stable and reliable performance
- LED light source, optical transmittance cover, large irradiation area, strong penetration and long service life
- Flame retardant plastic, no rust design, strong corrosion resistance
- The direction of the lamp can be adjusted from multiple angles
- Full power capacity, high battery energy density, long endurance lighting time

Product Description



Specification Sheet

Model No:	LLX-LED emergency lamp-1001
Input voltage:	AC85-220V
Product power:	3W
Emergency time:	3 hours
Charging time:	24 hours
Light source:	2*12 high brightness LED
Installation:	wall-mounted
Battery type:	Nickel-cadmium battery/lithium battery
IP:	IP30
Product size:	300*140*80mm

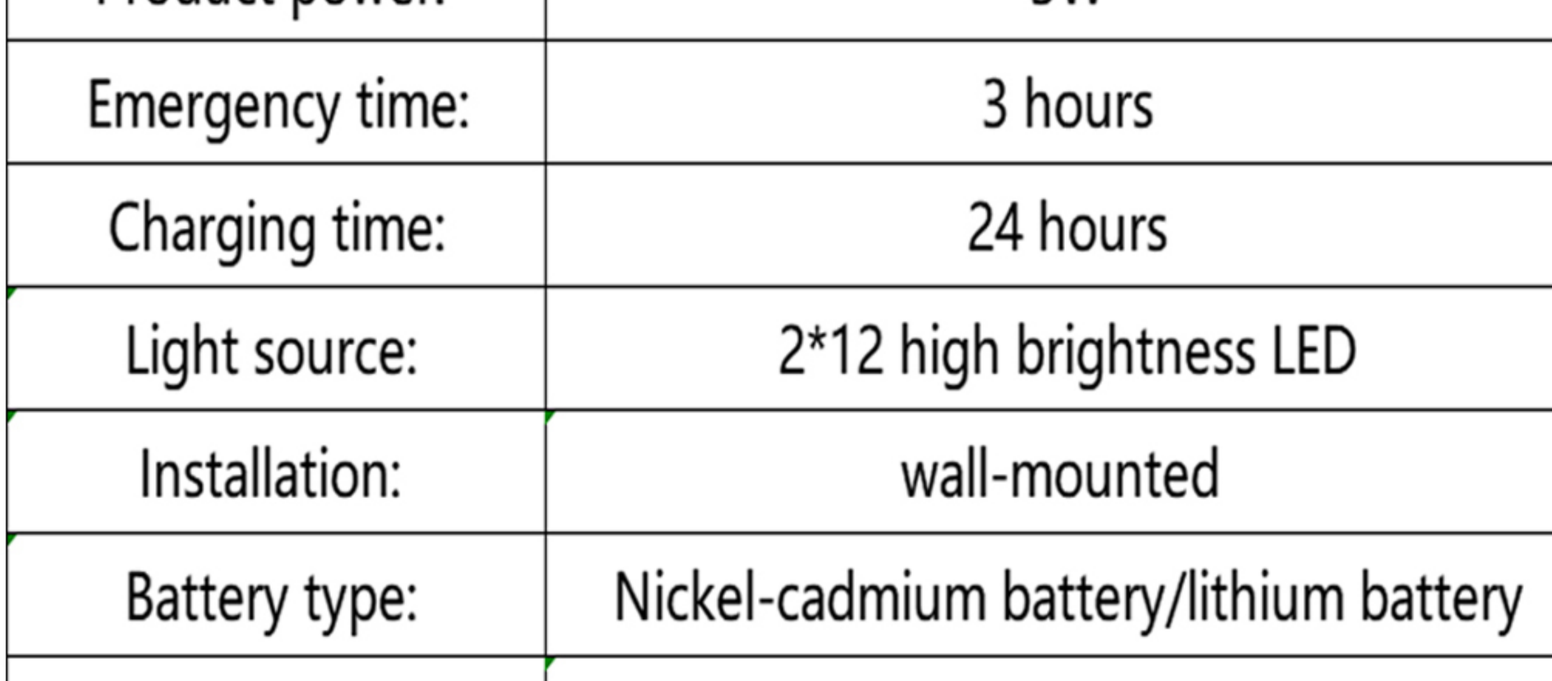

PACKAGING DATA




Model No:	LLX-LED emergency lamp-1001
Packing Quantity:	10 PCS/CTN
Box size:	51*32*32cm
Net weight:	8.5kg
Gross weight:	10.5kg

Applications:

Can be used in factories, hotels, parking lots, supermarkets, shopping malls, schools, commercial buildings, stations, entertainment places, public buildings, etc



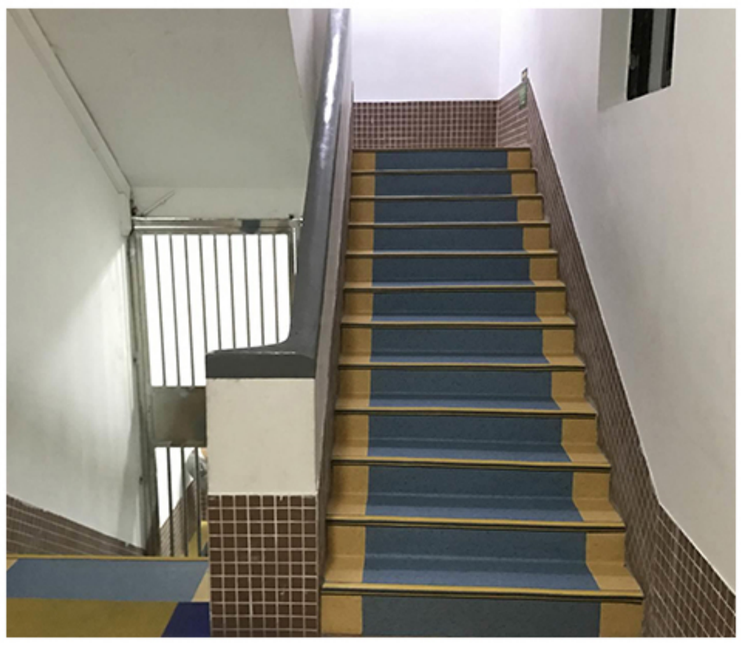



AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period.LONGLUX shall charge against defeats by abnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com