IP69K Series

LONGLUX



IP69K Lighting fixture

IP69K Lighting fixture

LONGLUX


Features




- Use fire-resistant and flame-retardant materials that can with stand high temperatures for a long time and are not easily oxidized
- Highlight LED CHIP, high visibility, high brightness
- Quick installation
- P.F. ≥0.9
- Beam angle: 120°
- Life time: 50,000hrs
- Warranty years: 5years

Product Description



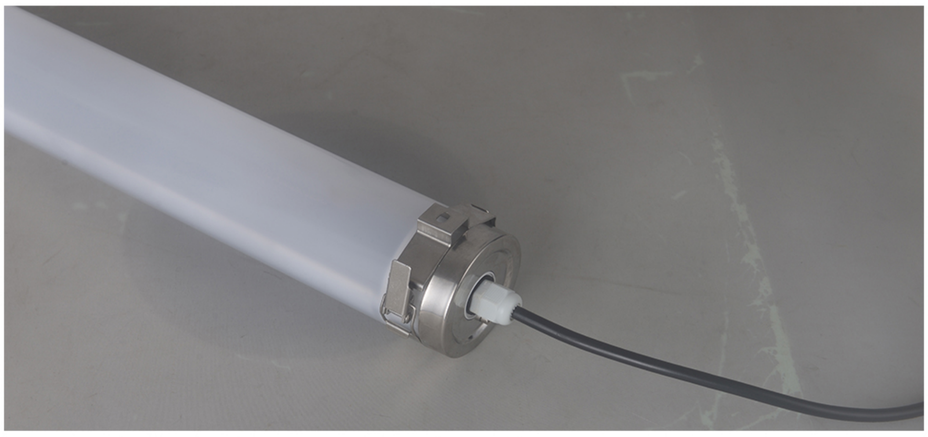

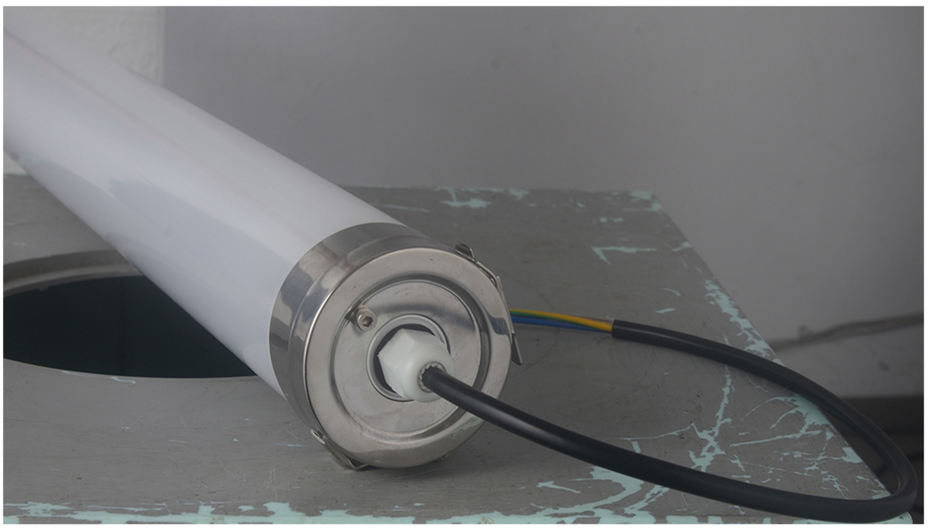


Specification Sheet

Model	LLX-TriProof-IP69K	LLX-TriProof-IP69K
Input Voltage	AC220-240V 50/60Hz	AC220-240V 50/60Hz
Power	40W	58W
LED type	Bridgelux SMD2835	Bridgelux SMD2835
Light effect	120LM/W	120LM/W
Luminious	4800LM	6960LM
Color Temp	3000-6500K	3000-6500K
CRI	80	80
IP rating	IP69K	IP69K
Product size	1181*78*78mm	1482*78*78mm
Material	PC body/Metal cap	

PACKAGING DATA


1PCS/CTN

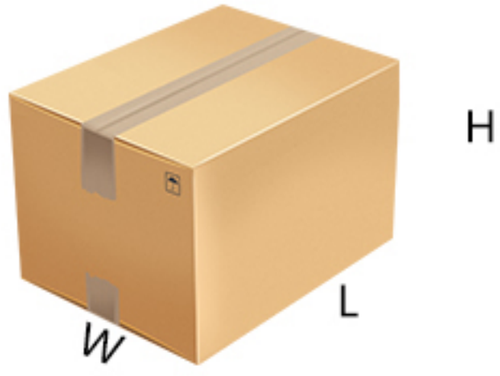

Model	Product size
LLX-TriProof-IP69K	1181*78*78mm
LLX-TriProof-IP69K	1482*78*78mm

Applications:

Lighting for applications that require frequent cleaning and rinsing, such as brewing systems, medical systems, car wash plants, and food and beverage factories. etc.

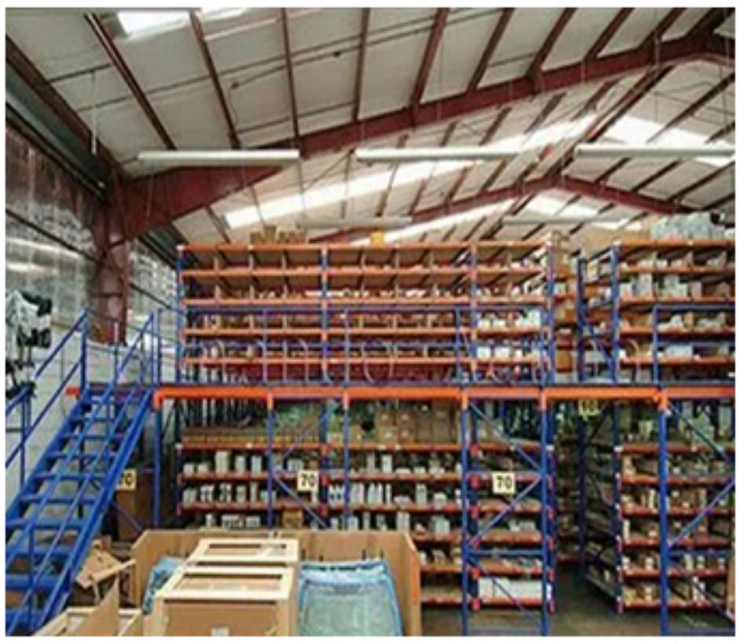
AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period. LONGLUX shall charge against defeats byabnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com