LONGLUX




Features



- Small stature,big energy.
- Acrylic material, transparent texture, double-sided transparent, beautiful and durable.
- Long emergency lighting time, emergency lighting time after electric storage 180 minutes
- Elevator corridor and other small environment emergency lighting good helper.
- Green energy saving,longer life and lower energy consumption.

Product Description



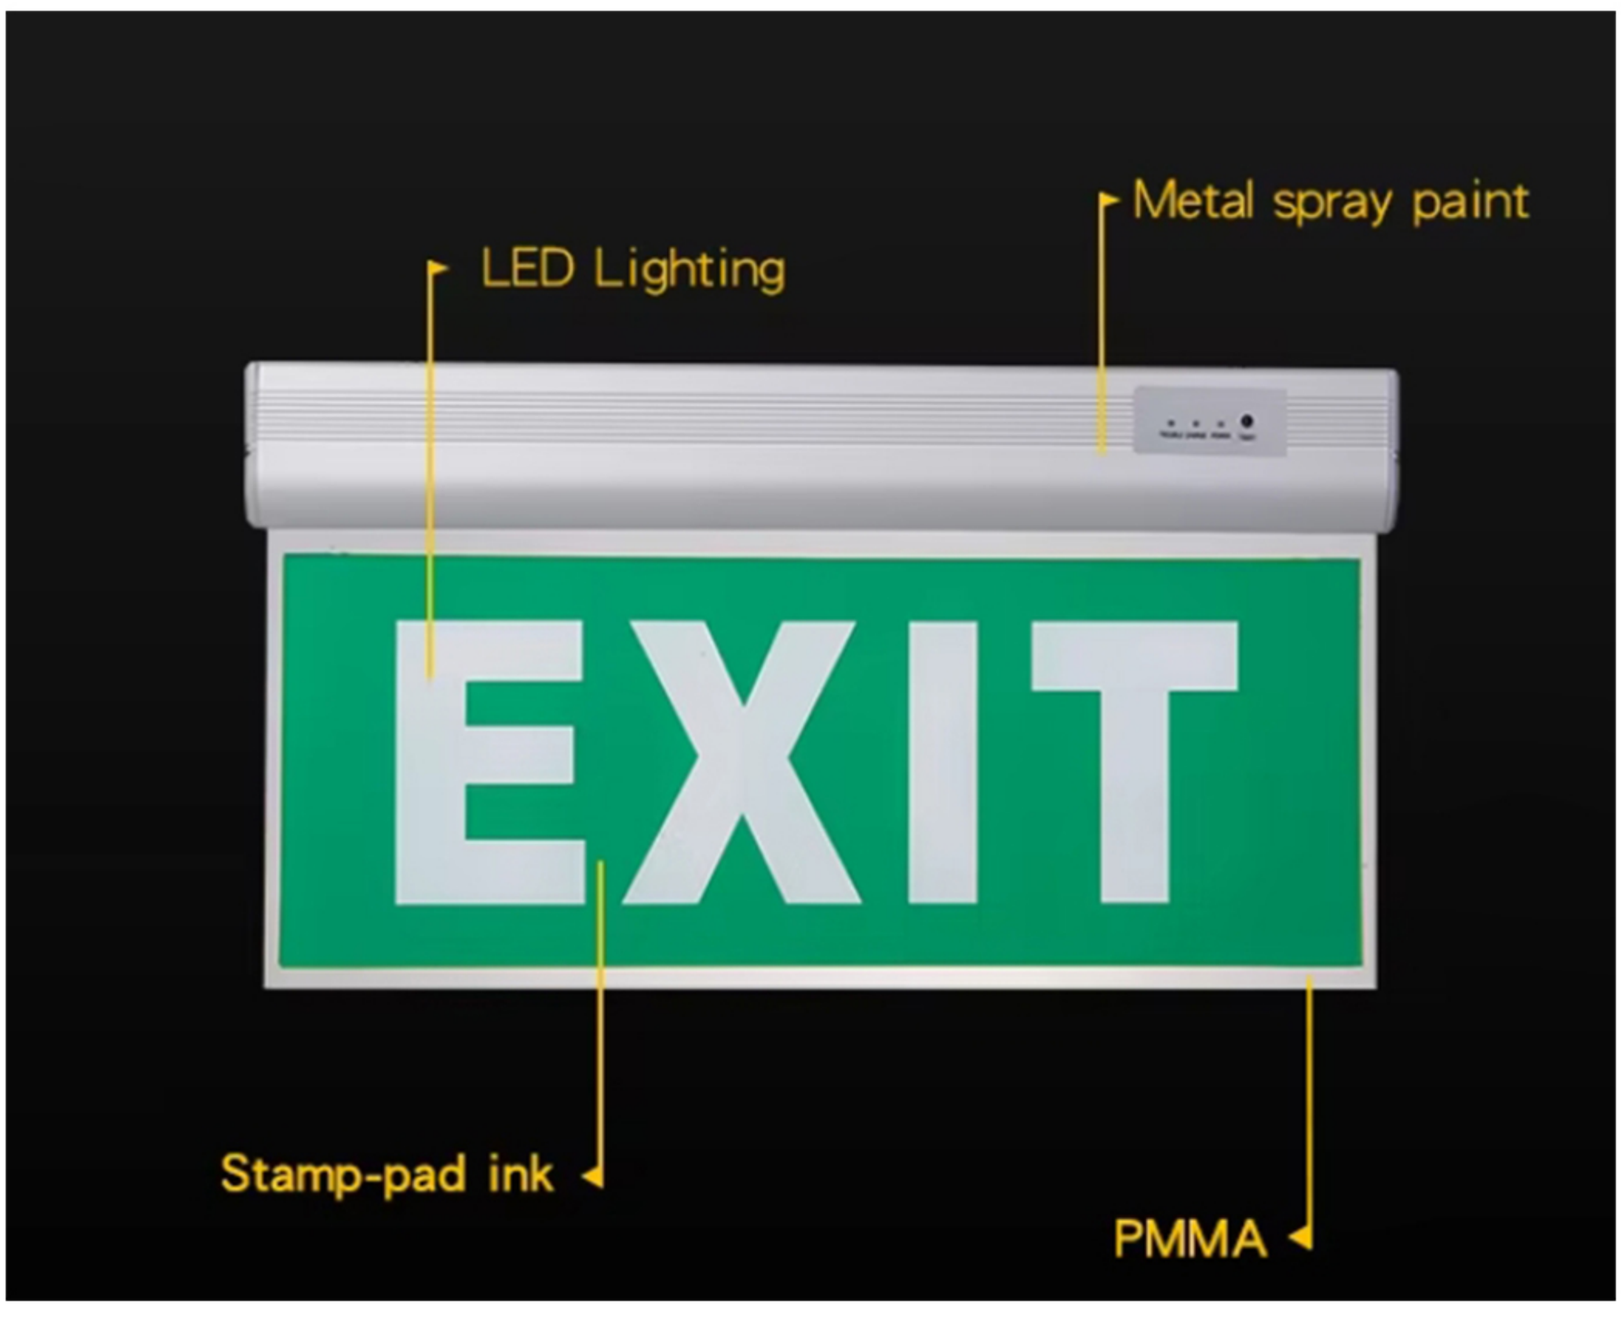

Specification Sheet

Model No.	LLX-LED Emergency Light-Exit A
Rated voltage	110-220V
Rated frequency	50/60Hz
Supply wattage Example	3W
Light source type	F5 Green Light * 12pcs
Battery type	3v 1800mA
Emergency time	≥ 180mins
Product dimension	370*200mm
Installation method	wall mounted / hoisting

PACKAGING DATA




Model No.	LLX-LED Emergency Light-Exit A
Product dimension	370*200mm

Applications:

Can be used in factories, hotels, parking lots, supermarkets, shopping malls, schools, commercial buildings, stations, entertainment places, public buildings, etc



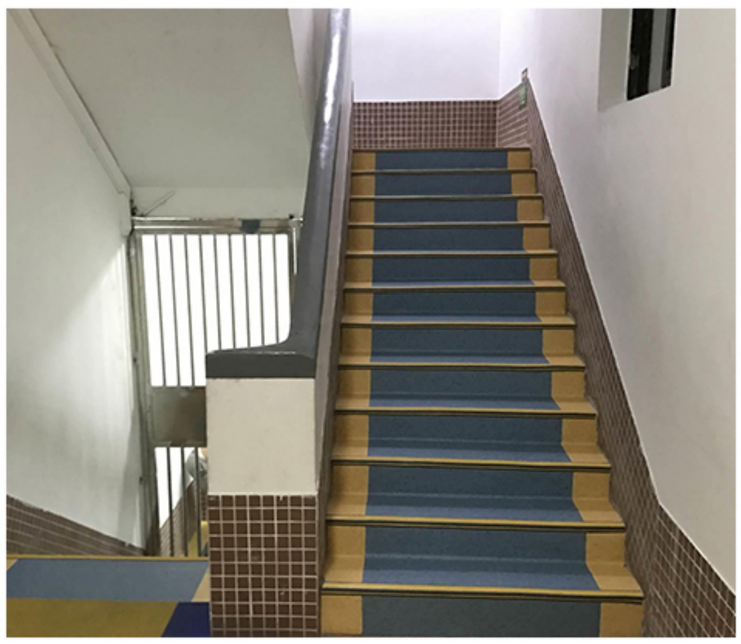



AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period.LONGLUX shall charge against defeats by abnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com