FLOOD LIGHT

LONGLUX



CB

Intertek

IEC

CE

CORROSION RESISTANT

IK07

STAINLESS STEEL RUST STAINLESS STEEL

STAINLESS STEEL 316

304

IP66



Features

- Integrated cooling design, elegant, efficient.
- Aluminum body,excellent heat treatment, high intensity IK07 tempered glass, its luminous efficiency un to 95%.
- Inclined 360 rotation bracket easier installation.
- Professional outdoor painting. stainless steel components, giving excellent performance in anti-corrosion and anti-rusting, widely used in different environment.
- Using ventilation plug release the air inside of the lamp.ensure excellent waterproof performance as well to discharge any moisture arise inside of the light.

Product Characteristics





IK07 TOUGHENED GLASS COVER:

High strength hardness cover，explosion-proof and high temperature resistance, bold breakthrough in glass strengthening

ALUMINUM HOUSING:

Die cast aluminum paint lamp body, rust proof, corrosion-resistant and heat dissipation quickly





HIGHLIGHTING LED CHIP:

Adopt 2835 chip, light color is even and bright, long service life

IP65 HIGH STRENGTH WATERPROOF:

High standard waterproof grade, not afraid of rainy days





HIGH POWER FACTOR:

PF 0.9, reduce the harm of harmonic wave and improve the voltage quality by using in large area



CONSTANT CURRENT DRIVE:

stable and flicker free

Product Photograph








Specification Sheet


Model No.	LLX-Flood Light -A50W	LLX-Flood Light -A 100W	LLX-Flood Light -A150W	LLX-Flood Light -A 200W
Wattage	50W	100W	150W	200W
Size(mm)	24*21*5.7	28.5*25.5*6.5	34.5*31*8	38*35*9.5
Weight (g)	330	530	1050	1300
PF	≥0.5 / >0.9	≥0.5 / >0.9	≥0.5 / >0.9	≥0.5 / >0.9
CCT(k)	3000 / 4000 / 6000	3000 / 4000 / 6000	3000 / 4000 / 6000	3000 / 4000 / 6000
CRI	70	70	70	70
IP	66	66	66	66


INSTALLATION

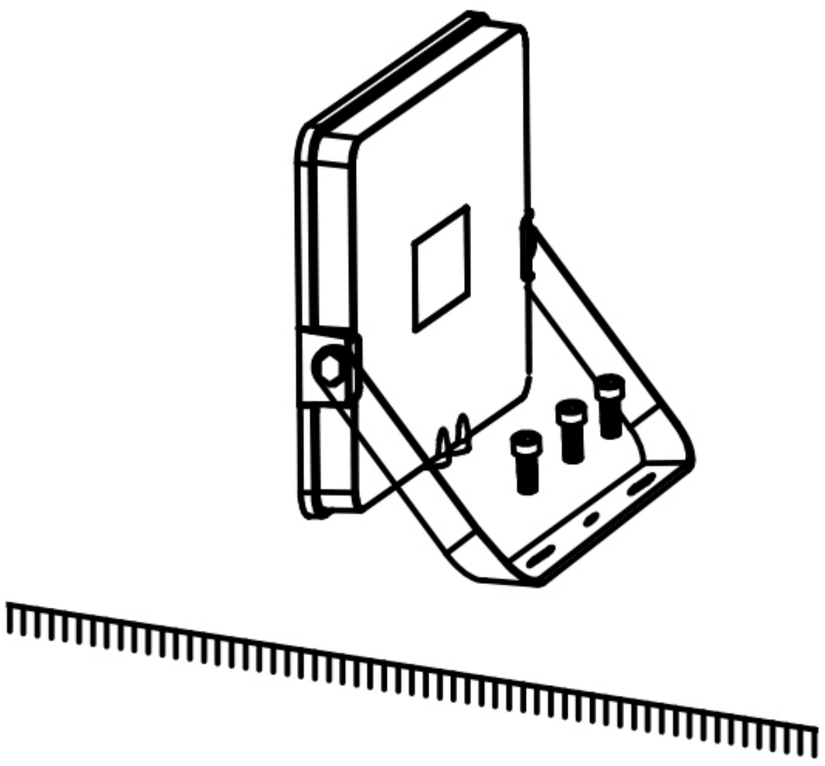

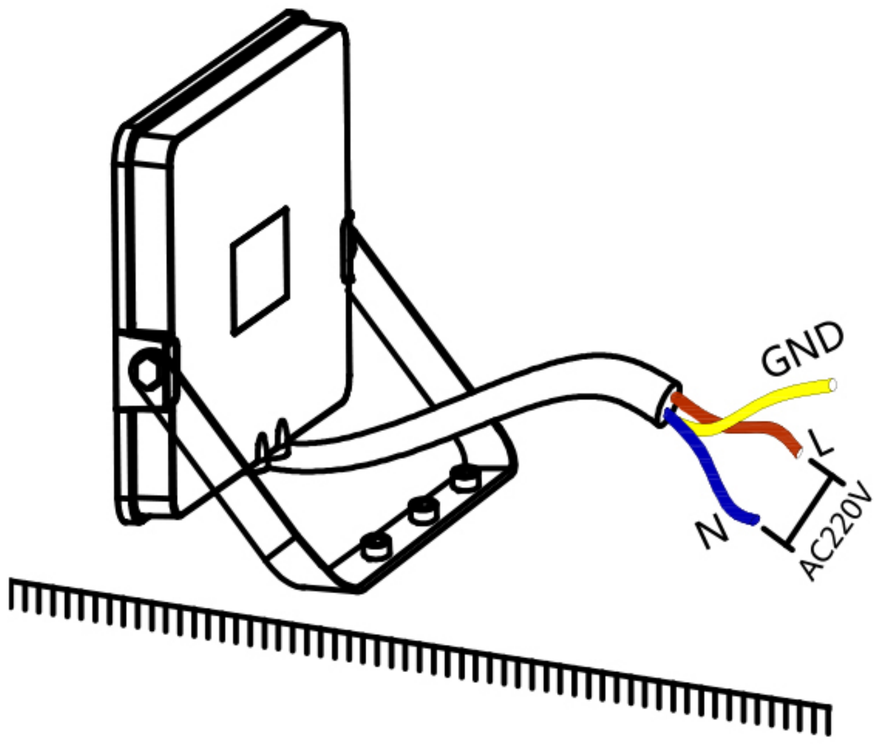

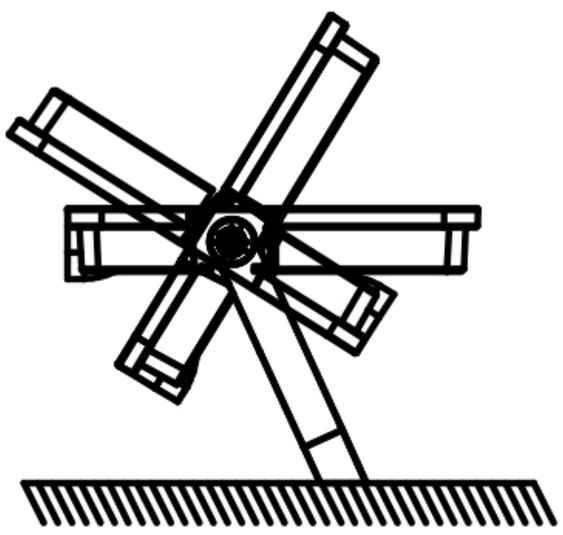

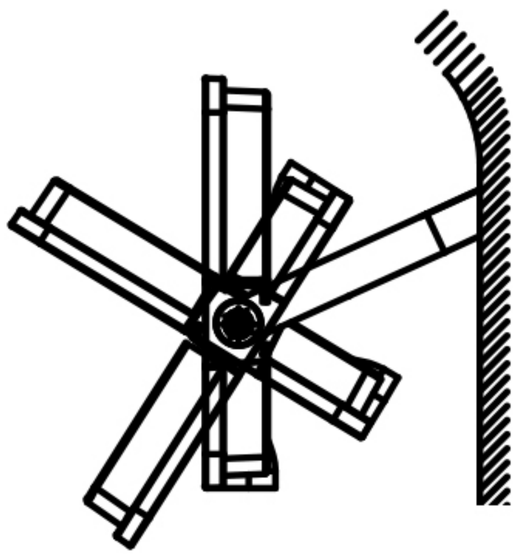

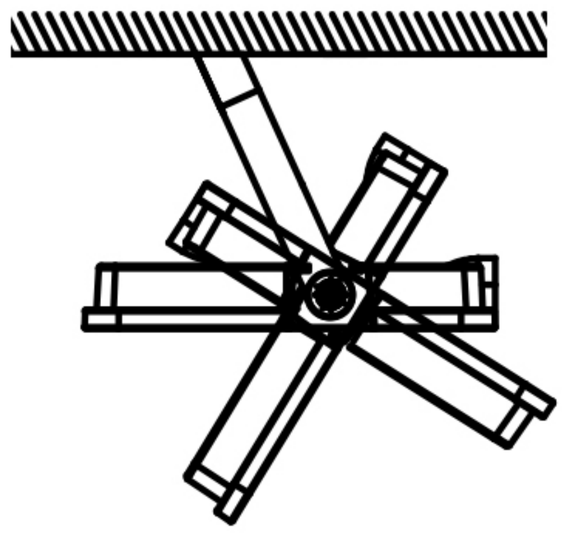

IMPORTANT SAFETY INFORMATION:

- ➤ Input Voltage:AC 100-277V,50/60Hz.
- ➤ Working Temperature: -25℃~ 40℃.
- ➤ This fitting must be wired in accordance with the National Electrical Code and applicable local codes and ordinances.
- ➤ Istallation and servicing this fitting should be performed by qualified electrician only.
- ➤ Before installation or maintenance, turn off electric power and allow the fitting to be cool.
- ➤ Proper grounding is required to insure personal safety. Carefully observe grounding procedure under installation section.
- ➤ Ensure all electrical connections are secure & that there are no loose strands.
- ➤ Install the fitting in a well-ventilated environment, keep away from corrosive/explosive materials, flammable gas or electric dust.
- ➤ Violent shaking or impact should be avoided when the fitting is working.
- ➤ To weather proof your outdoor installation, be sure to seal all holes, conduit plugs with silicone caulking.

WIRING INSTRUCTION OF MAIN CABLE:




black(or brown)line —— connect live wire
white(or blue)line —— connect neutral wire
green(or yellow-green)line —— connect earth wire

⚠ WARNING:

The product must be grounded and installed in accordance with the National Electrical Code and all local codes
Failure to do so may increase the RISH OF PERSONAL INJURY, PROPERTY DAMAGE, FIRE AND DEATH

PACKAGING DATA

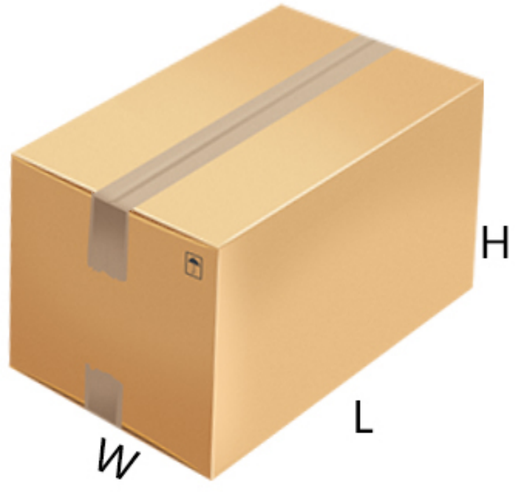

Model No.	Wattage	Size(mm)	Weight (g)
LLX-Flood Light -A50W	50W	24*21*5.7	330
LLX-Flood Light -A 100W	100W	28.5*25.5*6.5	530
LLX-Flood Light -A150W	150W	34.5*31*8	1050
LLX-Flood Light -A 200W	200W	38*35*9.5	1300

Applications:

Parks,courtyards,Public buildings,Shopping malls,Historic Areas etc.







AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period. LONGLUX shall charge against defeats byabnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com