LED Panel Light（IP65）

LONGLUX



Dimmable
100% - 10%


Fire Resistant

LED Panel Light


Features

- Ultra slim design,double strong frame
- IP65 waterproof design
- Swithable or Dimmable(0-10v/Traic / Dali base on driver)
- Emergency light version with individual battery 3 hours
- For Spray Booth, Cleanroom,etc
- Smooth and even light.

Product Description

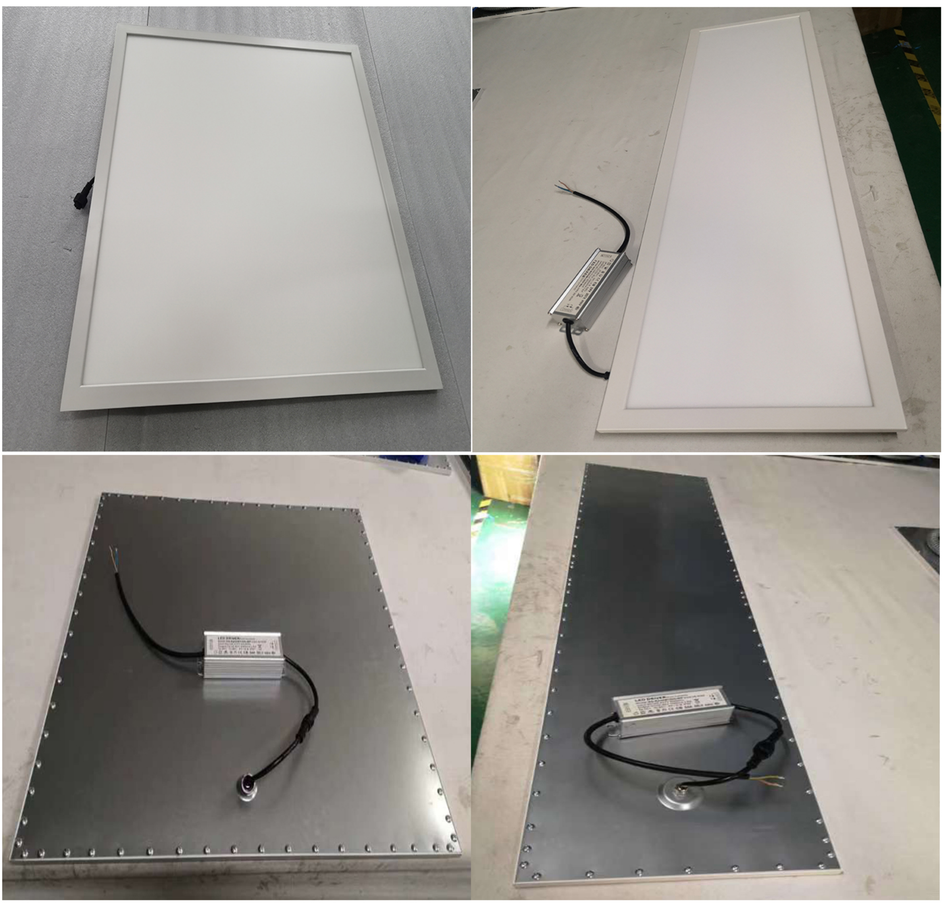

Product Dimension(mm)

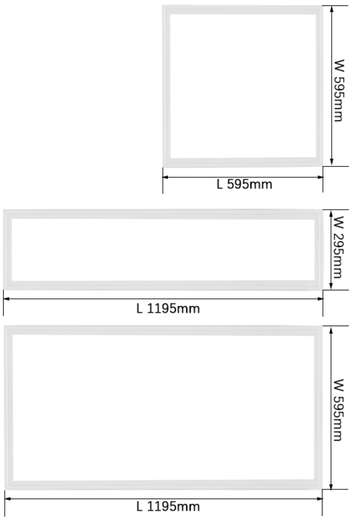

Specification Sheet


Model No.	LLX-Panel IP65-6060	LLX-Panel IP65 -30120	LLX-Panel IP65-60120
Rated Power(W)	40	40	60
Lumen Output(lm)±5%	3600-4500	3600-4500	3600-4500
Rated/Actual Input	230Vac/200~240Vac 50Hz	230Vac/200~240Vac 50Hz	230Vac/200~240Vac 50Hz
Driver Output Data	25-38Vdc / 36W	25-38Vdc / 36W	25-38Vdc / 54W
Power Factor/THD/PE	>90%/<15/88%	>90%/<15/88%	>90%/<15/88%
Life Hours L90/L80	30,000 hrs/50,000hrs	40,000 hrs/50,000hrs	30,000 hrs/50,000hrs
Dimension(MM)	L=596mm W=596mm H=11mm	L=1196mm W=296mm H=11mm	L=596mm W=1196mm H=11mm


LED Panel Light


LONGLUX


Install Instructions

FRAME MOUNTED

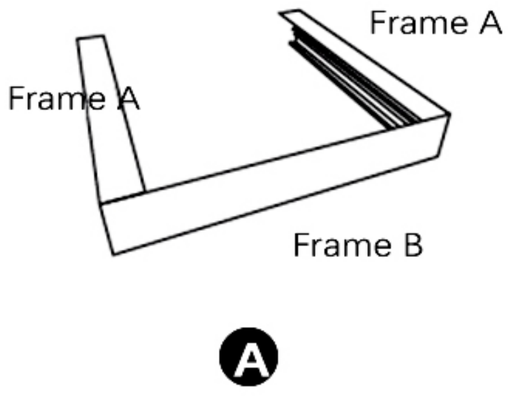

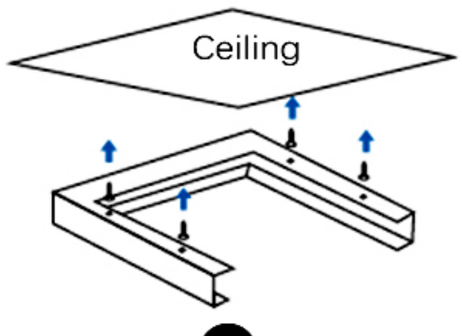


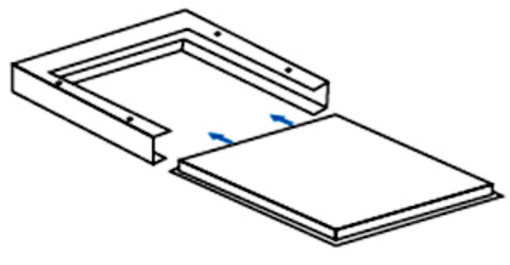


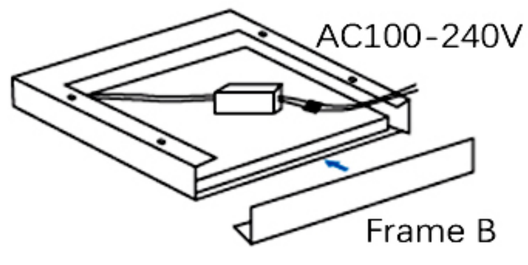


SUSPENSION




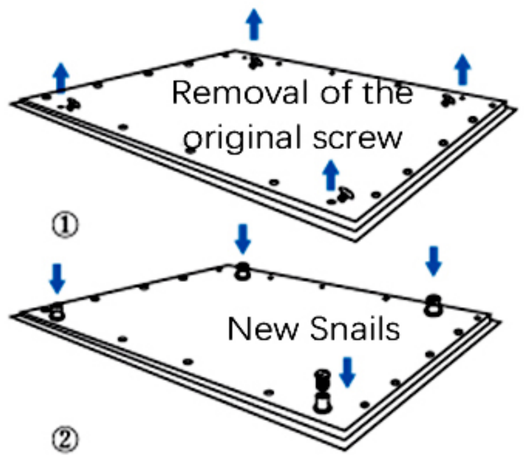


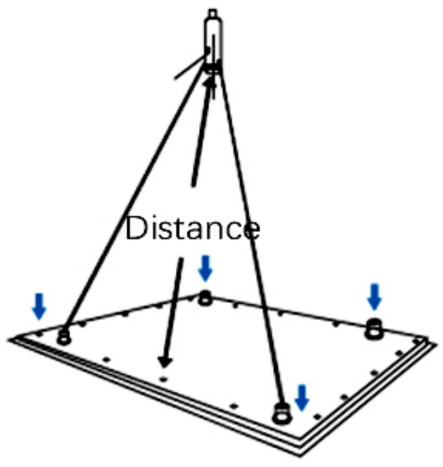


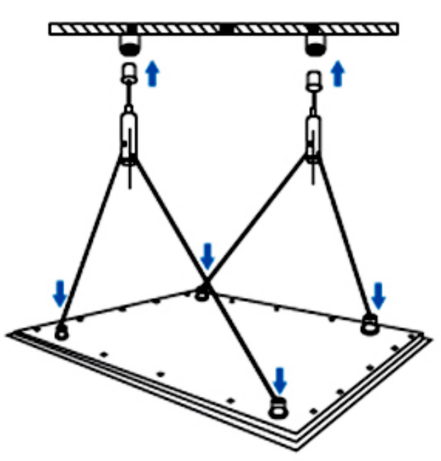


RECESSED IN A CUT-OUT HOLE

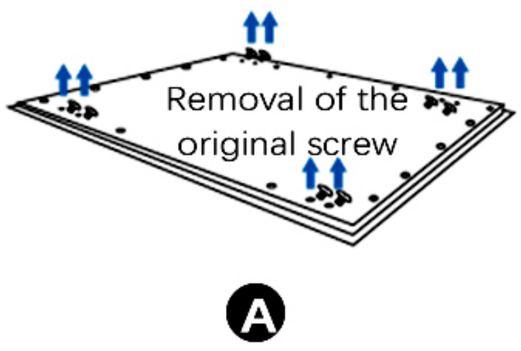


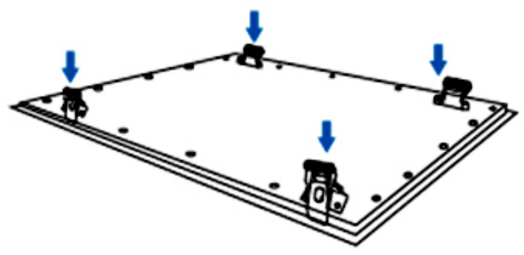


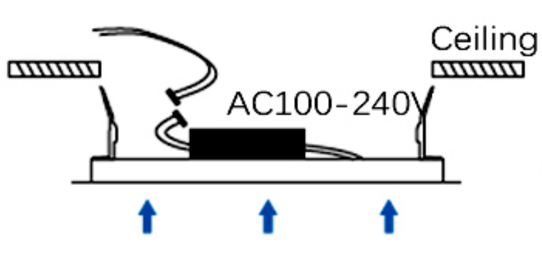


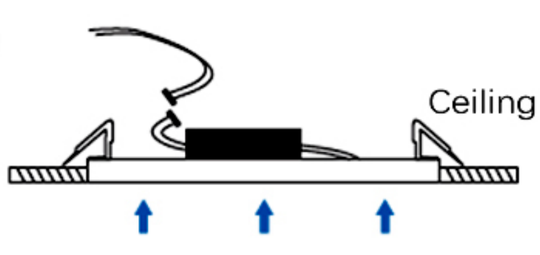


CEILING MOUNTED

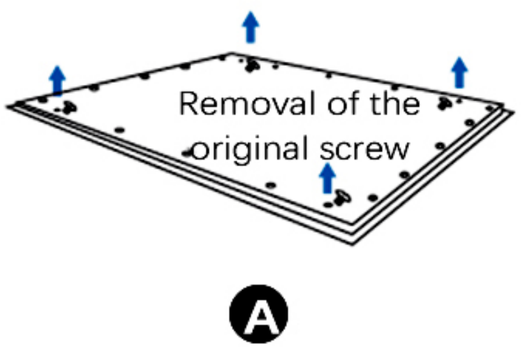

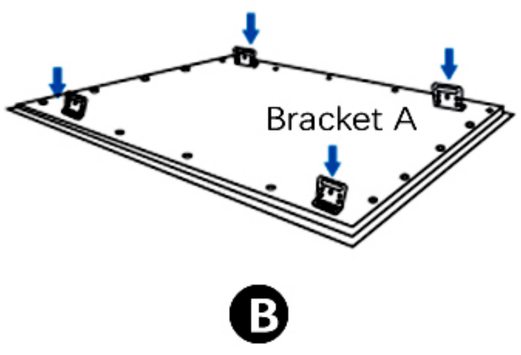

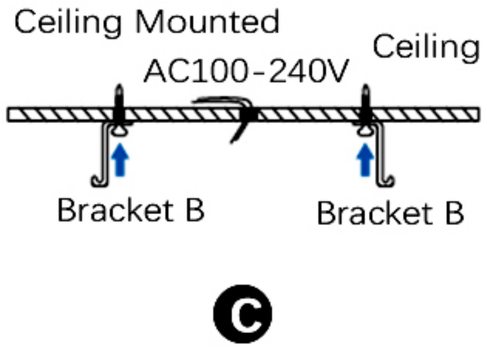

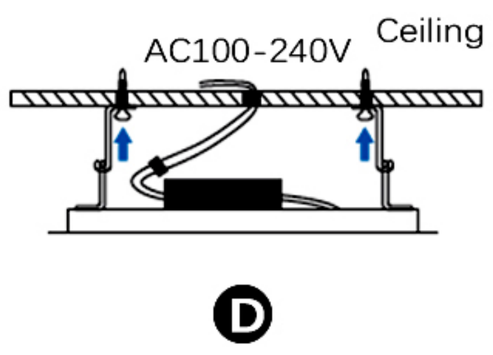

NOTES:

- Make sure the luminaries are installed and fitted by a qualified electrician ensuring the installation complies to the current.
- National Electrical Code and all local codes.
- Ensure all electrical connections are secure & that there are no loose strands.
- This is a Class I product and must be earthed.
- Make sure that the fixings are adequate to support the weight of the fitting.
- Before installation or maintenance, turn off electric power and allow the fitting to be cool.

WIRING INSTRUCTION OF MAIN CABLE:



black(or brown)line —— connect live wire
white(or blue)line —— connect neutral wire
green(or yellow-green)line —— connect earth wire

⚠ WARNING:

The product must be grounded and installed in accordance with the National Electrical Code and all local codes
Failure to do so may increase the RISH OF PERSONAL INJURY, PROPERTY DAMAGE, FIRE AND DEATH

LED Panel Light

LONGLUX

PACKAGING DATA

10or5PCS/CTN



Model No.	Q'ty/Ctn	NW (Kg/Ctn)	G.W (Kg/Ctn)	Carton Dim (L*W*H)(MM)
LLX-Panel IP65-6060	5	13	15	635*670*175
LLX-Panel IP65 -30120	5	13	15	1235*370*175
LLX-Panel IP65-60120	5	25	28	1235*670*175

Applications:

Lighting for Supermarket, Family,Conference room,Warehouse,Office,Corridors and other places.







AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period.LONGLUX shall charge against defeats by abnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com