LED Panel Light (US TYPE)

LONGLUX



Dimmable
100% - 10%

Fire Resistant


LED Panel Light




Features

- Standard replacement for traditional grille light.
- Ultra slim design,aluminum frame.
- PMMA light guide plate,nice and consistent lighting distribution.
- 25000Hrs -50000Hrs lifespan.
- Smooth and even light.
- Thickness 1cm.
- 5years warranty.
- Driver: Normal Philips / Dimmable Philips / Dimmable BOKE.

Product Description

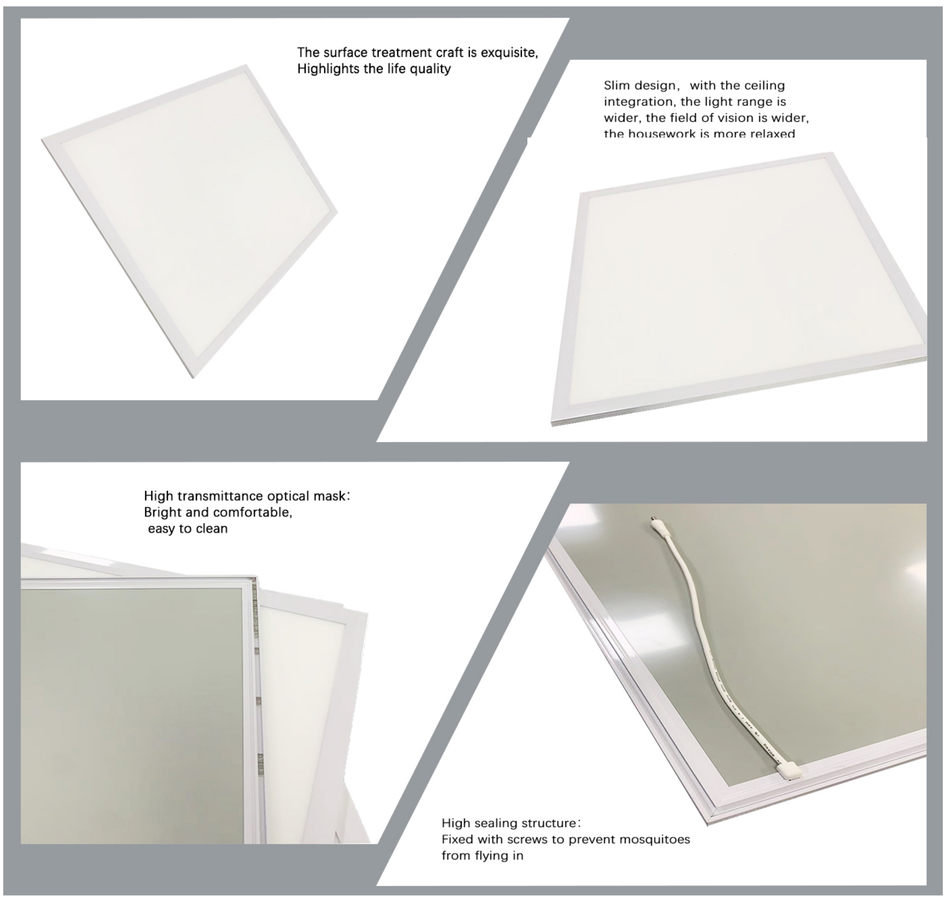

Product Dimension(mm)

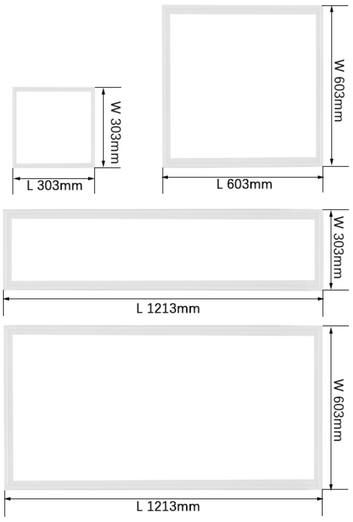

Specification Sheet


Model No.	Power (W)	Voltage (V)	Light Efficiency (LM/W)	CRI	Color Temperature (K)	PF	Flickering	Dimension (MM)
LLX-Panel -U3030	20	AC100-277	80-130	>80	3000/4000/5000/6500	>0.9	Yes/No	303*303*10
LLX-Panel -U6060-1	36	AC100-277	80-130	>80	3000/4000/5000/6500	>0.9	Yes/No	603*603*10
LLX-Panel -U6060-2	40	AC100-277	80-130	>80	3000/4000/5000/6500	>0.9	Yes/No	603*603*10
LLX-Panel -U6060-3	48	AC100-277	80-130	>80	3000/4000/5000/6500	>0.9	Yes/No	603*603*10
LLX-Panel -U30120-1	36	AC100-277	80-130	>80	3000/4000/5000/6500	>0.9	Yes/No	303*1213*10
LLX-Panel -U30120-2	40	AC100-277	80-130	>80	3000/4000/5000/6500	>0.9	Yes/No	303*1213*10
LLX-Panel -U30120-3	48	AC100-277	80-130	>80	3000/4000/5000/6500	>0.9	Yes/No	303*1213*10
LLX-Panel -U60120-1	60	AC100-277	80-130	>80	3000/4000/5000/6500	>0.9	Yes/No	603*1213*10
LLX-Panel -U60120-2	72	AC100-277	80-130	>80	3000/4000/5000/6500	>0.9	Yes/No	603*1213*10


LED Panel Light


LONGLUX


Install Instructions

FRAME MOUNTED

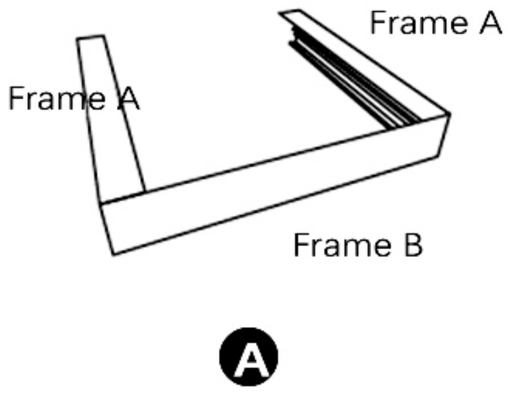


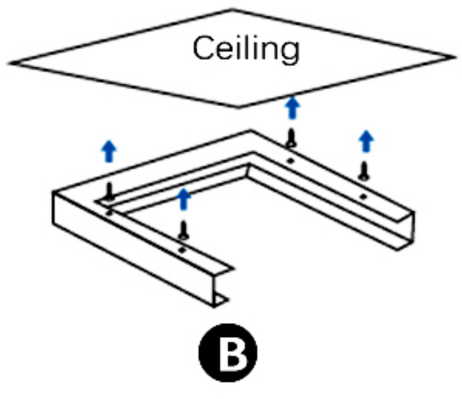


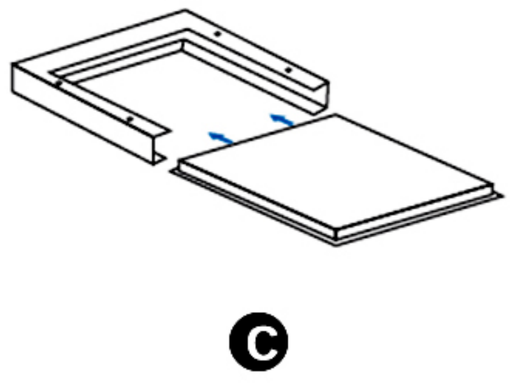


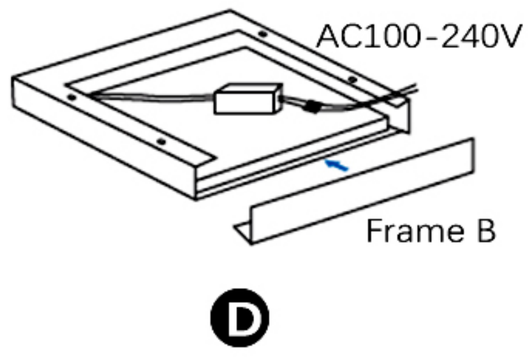


SUSPENSION

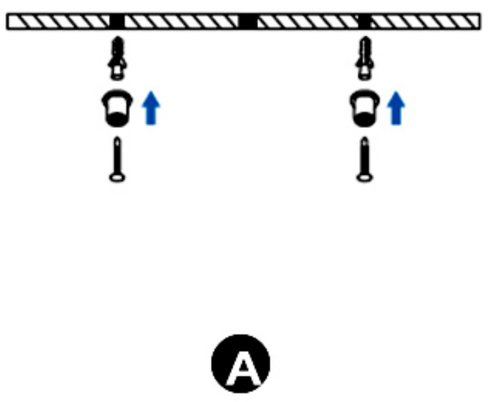


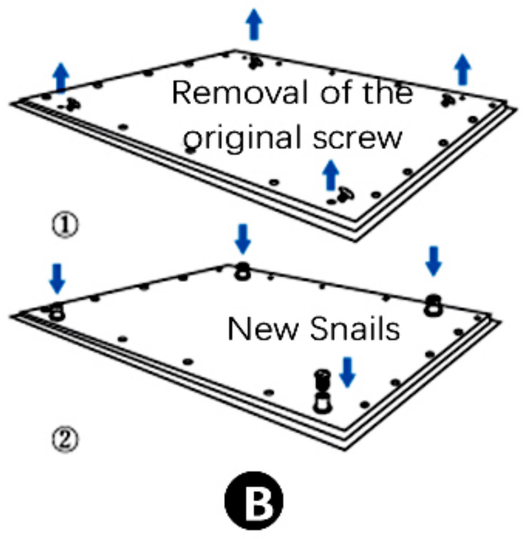


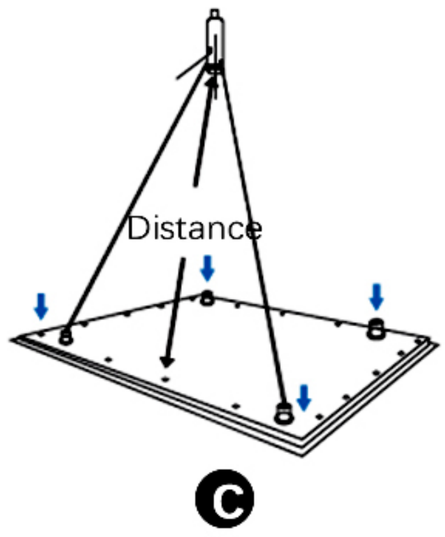


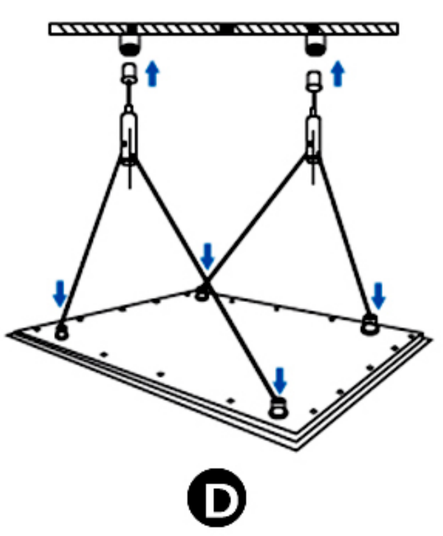


RECESSED IN A CUT-OUT HOLE

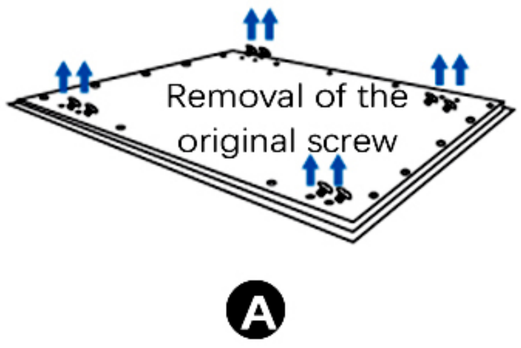


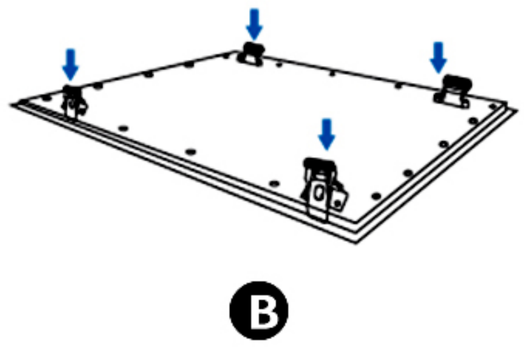


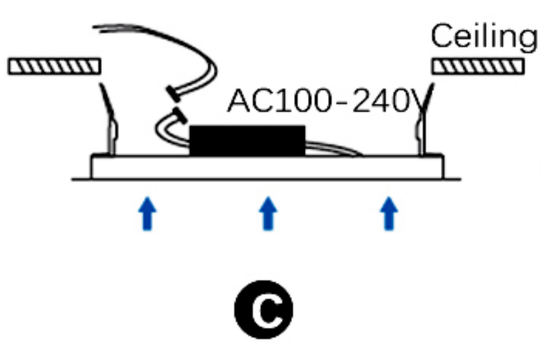


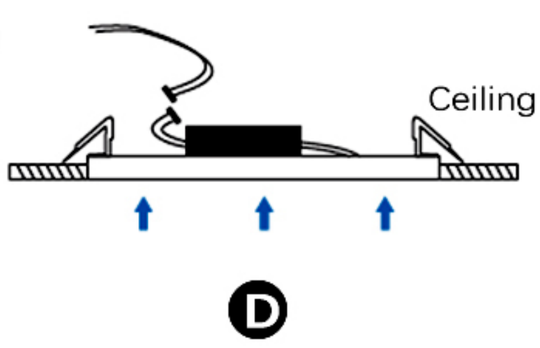


CEILING MOUNTED

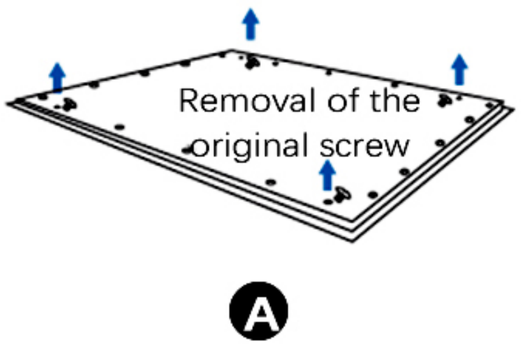

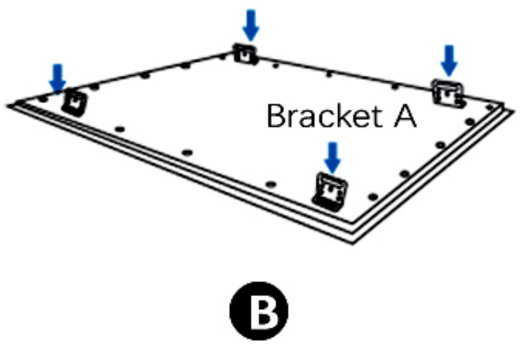

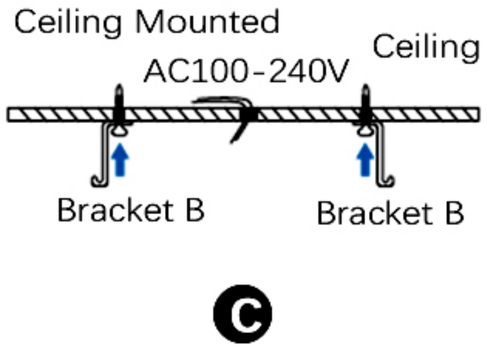

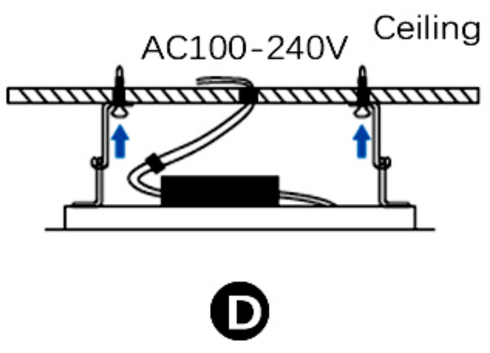

NOTES:

- Make sure the luminaries are installed and fitted by a qualified electrician ensuring the installation complies to the current.
- National Electrical Code and all local codes.
- Ensure all electrical connections are secure & that there are no loose strands.
- This is a Class I product and must be earthed.
- Make sure that the fixings are adequate to support the weight of the fitting.
- Before installation or maintenance, turn off electric power and allow the fitting to be cool.

WIRING INSTRUCTION OF MAIN CABLE:



⚠ WARNING:

The product must be grounded and installed in accordance with the National Electrical Code and all local codes
Failure to do so may increase the RISH OF PERSONAL INJURY, PROPERTY DAMAGE, FIRE AND DEATH

LED Panel Light

LONGLUX

PACKAGING DATA

10or5PCS/CTN



Model No.	Q'ty/Ctn	N.W(Kg/Ctn)	G.W.(Kg/Ctn)	Carton Dim(L*W*H)(MM)
LLX-Panel -U3030	10	6	8	655*370*175
LLX-Panel -U6060-1	5	13	15	635*670*175
LLX-Panel -U6060-2	5	13	15	635*670*175
LLX-Panel -U6060-3	5	13	15	635*670*175
LLX-Panel -U30120-1	5	13	15	1235*370*175
LLX-Panel -U30120-2	5	13	15	1235*370*175
LLX-Panel -U30120-3	5	13	15	1235*370*175
LLX-Panel -U60120-1	5	25	28	1235*670*175
LLX-Panel -U60120-2	5	25	28	1235*670*175

Applications:

Lighting for Supermarket, Family,Conference room,Warehouse,Office,Corridors and other places.







AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period.LONGLUX shall charge against defeats by abnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com