Waterproof Light

LONGLUX

Features

- Input Voltage(V): AC220-240V，50/60HZ
- Efficiency : 130 LM/W - 180 LM/W
- Beam Angle: 120°
- Material: PC base/ PC cover
- Driver Type：OSRAM/TRIDONIC/PHILIPS/Chinese driver for option
- Operating Ambient Temperature：-20℃~50℃
- Operating Humidity：10%-90%
- Warranty：Up to 50000 Hours (at working temperature 25°C)


Product Description










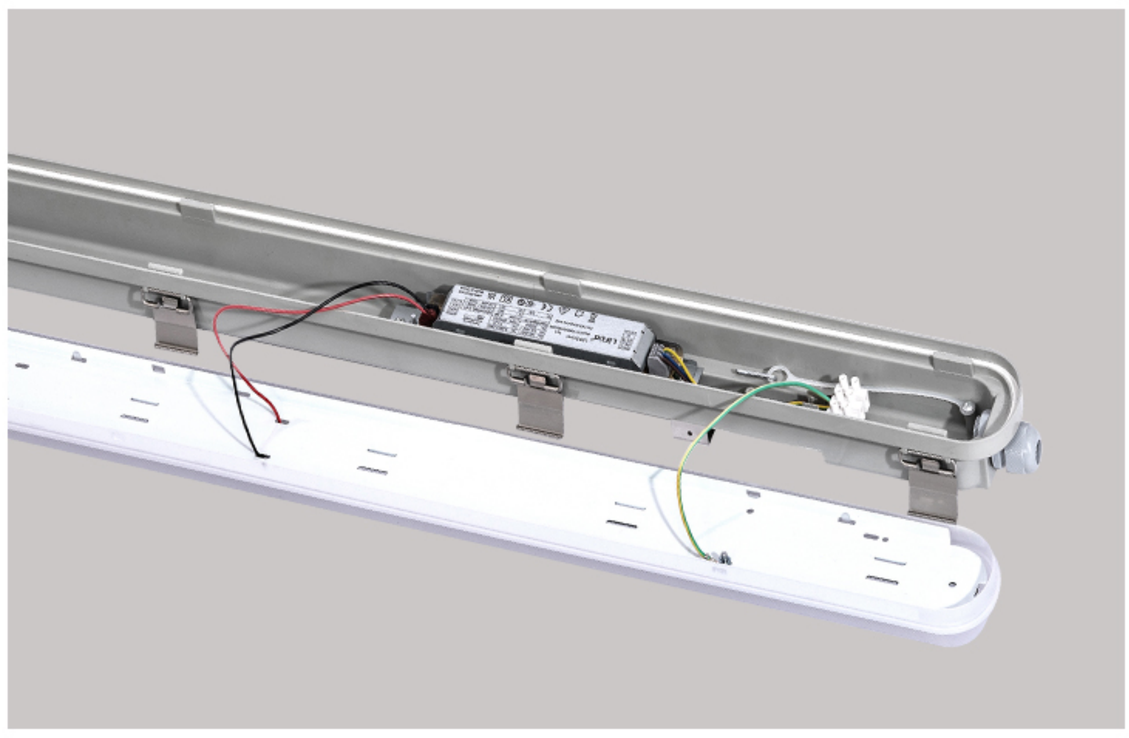

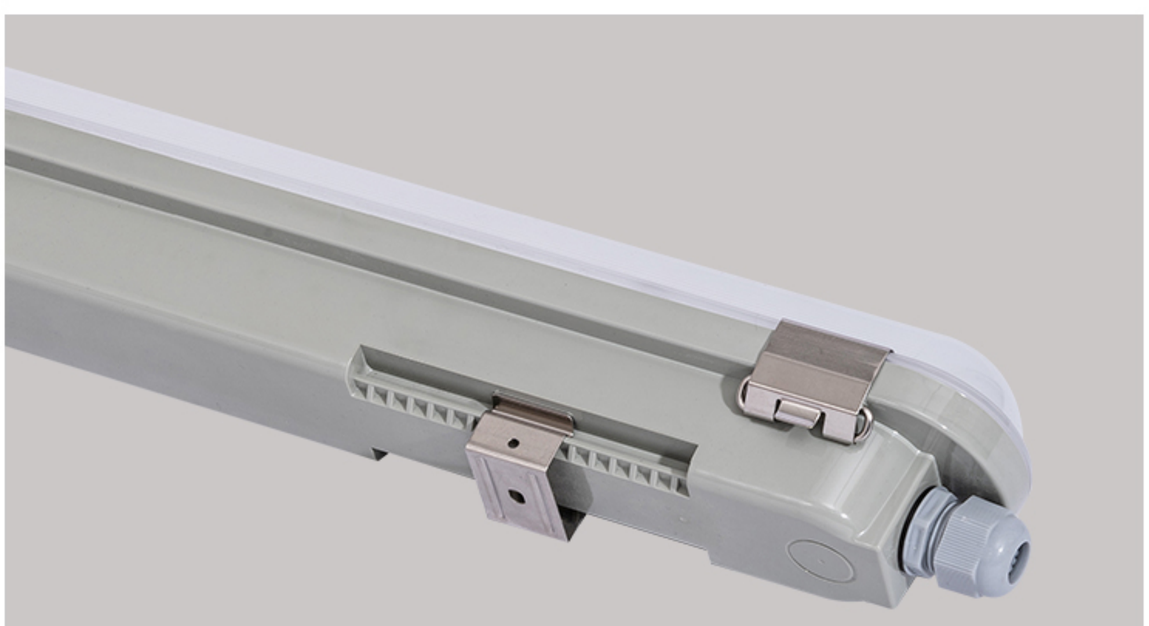



Specification Sheet

Model	LLX-TriProof-20	LLX-TriProof-40	LLX-TriProof-54	LLX-TriProof-60
Watt	20W	40W	54W	60W
IP Rating	IP 65	IP 65	IP 65	IP 65
LM/W	130 - 180	130 - 180	130 - 180	130 - 180
CCT	3000-6500K	3000-6500K	3000-6500K	3000-6500K
RA	>80	>80	>80	>80
IK	IK08	IK08	IK08	IK08
Size(L*W*H)	600*85*78mm	1200*85*78mm	1200*85*78mm	1500*85*78mm

Waterproof Light

PACKAGING DATA



Model	LLX-TriProof-20	LLX-TriProof-40	LLX-TriProof-54	LLX-TriProof-60
N.W./CTN	6.3	11.2	11.2	14.9
G.W./CTN	7.3	12.2	12.2	15.9
Carton Dim(L*W*H)	62*33.5*20.5	122*33.5*20.5	122*33.5*20.5	152*33.5*20.5
Qty/Carton(PCS)	8	8	8	6

Applications:

Can be used in some specific applications. Reliability and durability, High mechanical strength, Corrosion & Explosion resistant.
Saulty, acid or arrosion applications like passageway, ship, harbor, underground parking or beach projects
Industry, garages, gas station & workshops.







AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period.LONGLUX shall charge against defeats by abnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com