Triproof Lighting Fixture- 8FT Series

LONGLUX



Waterproof Light

LONGLUX

Features




- Housing: PC(5VA), with good mechanical performance
- Cover: PC(f1) , with higher light transmittance
- Body and diffuser meet IK08 and 850°C glow wire test requirement
- Clips: PC or Stainless Steel, ensuring IP65 of the lighting fixture
- Reflector: Painted Iron plate, easy installation and maintenance
- Cable Gland: ≥PG9, available for wiring input on one side of the housing
- Use rubber cable 3x1mm² or 3x1.5mm² for outdoor mounting
- Suitable for electronic ballast and tube according to client'srequirements
- Suitable to add Emergency Kit according to client's requirements

Product Description



Specification Sheet

Model	LLX-TriProof-8FT-18	LLX-TriProof-8FT-32
Watt(W)	4*18	4*32
IP Rating	IP 65	IP 65
Dim(L*W*H)	2560*160*105	2560*160*105
Carton Dim(L*W*H)	258*17*8	258*17*8
Qty/Carton(PCS)	1	1

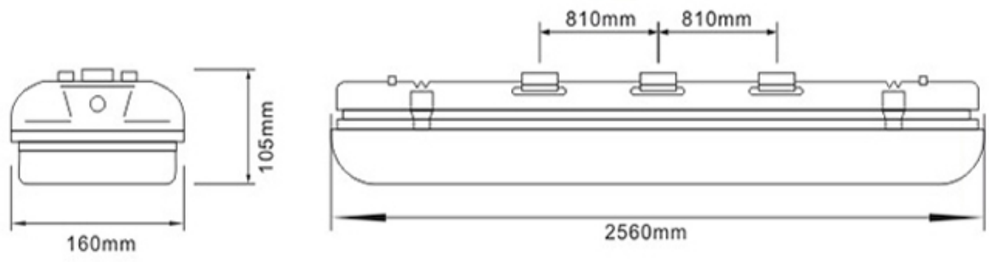

Waterproof Light

LONGLUX

PACKAGING DATA



Model	LLX-TriProof-8FT-18	LLX-TriProof-8FT-32
Carton Dim(L*W*H)	258*17*8	258*17*8
Qty/Carton(PCS)	1	1

Applications:

Can be used in some specific applications. Reliability and durability, High mechanical strength, Corrosion & Explosion resistant.
Saulty, acid or arrosion applications like passageway, ship, harbor, underground parking or beach projects
Industry, garages, gas station & workshops.







AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period.LONGLUX shall charge against defeats by abnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com