
Triproof Lighting Fixture- CX Series

LONGLUX

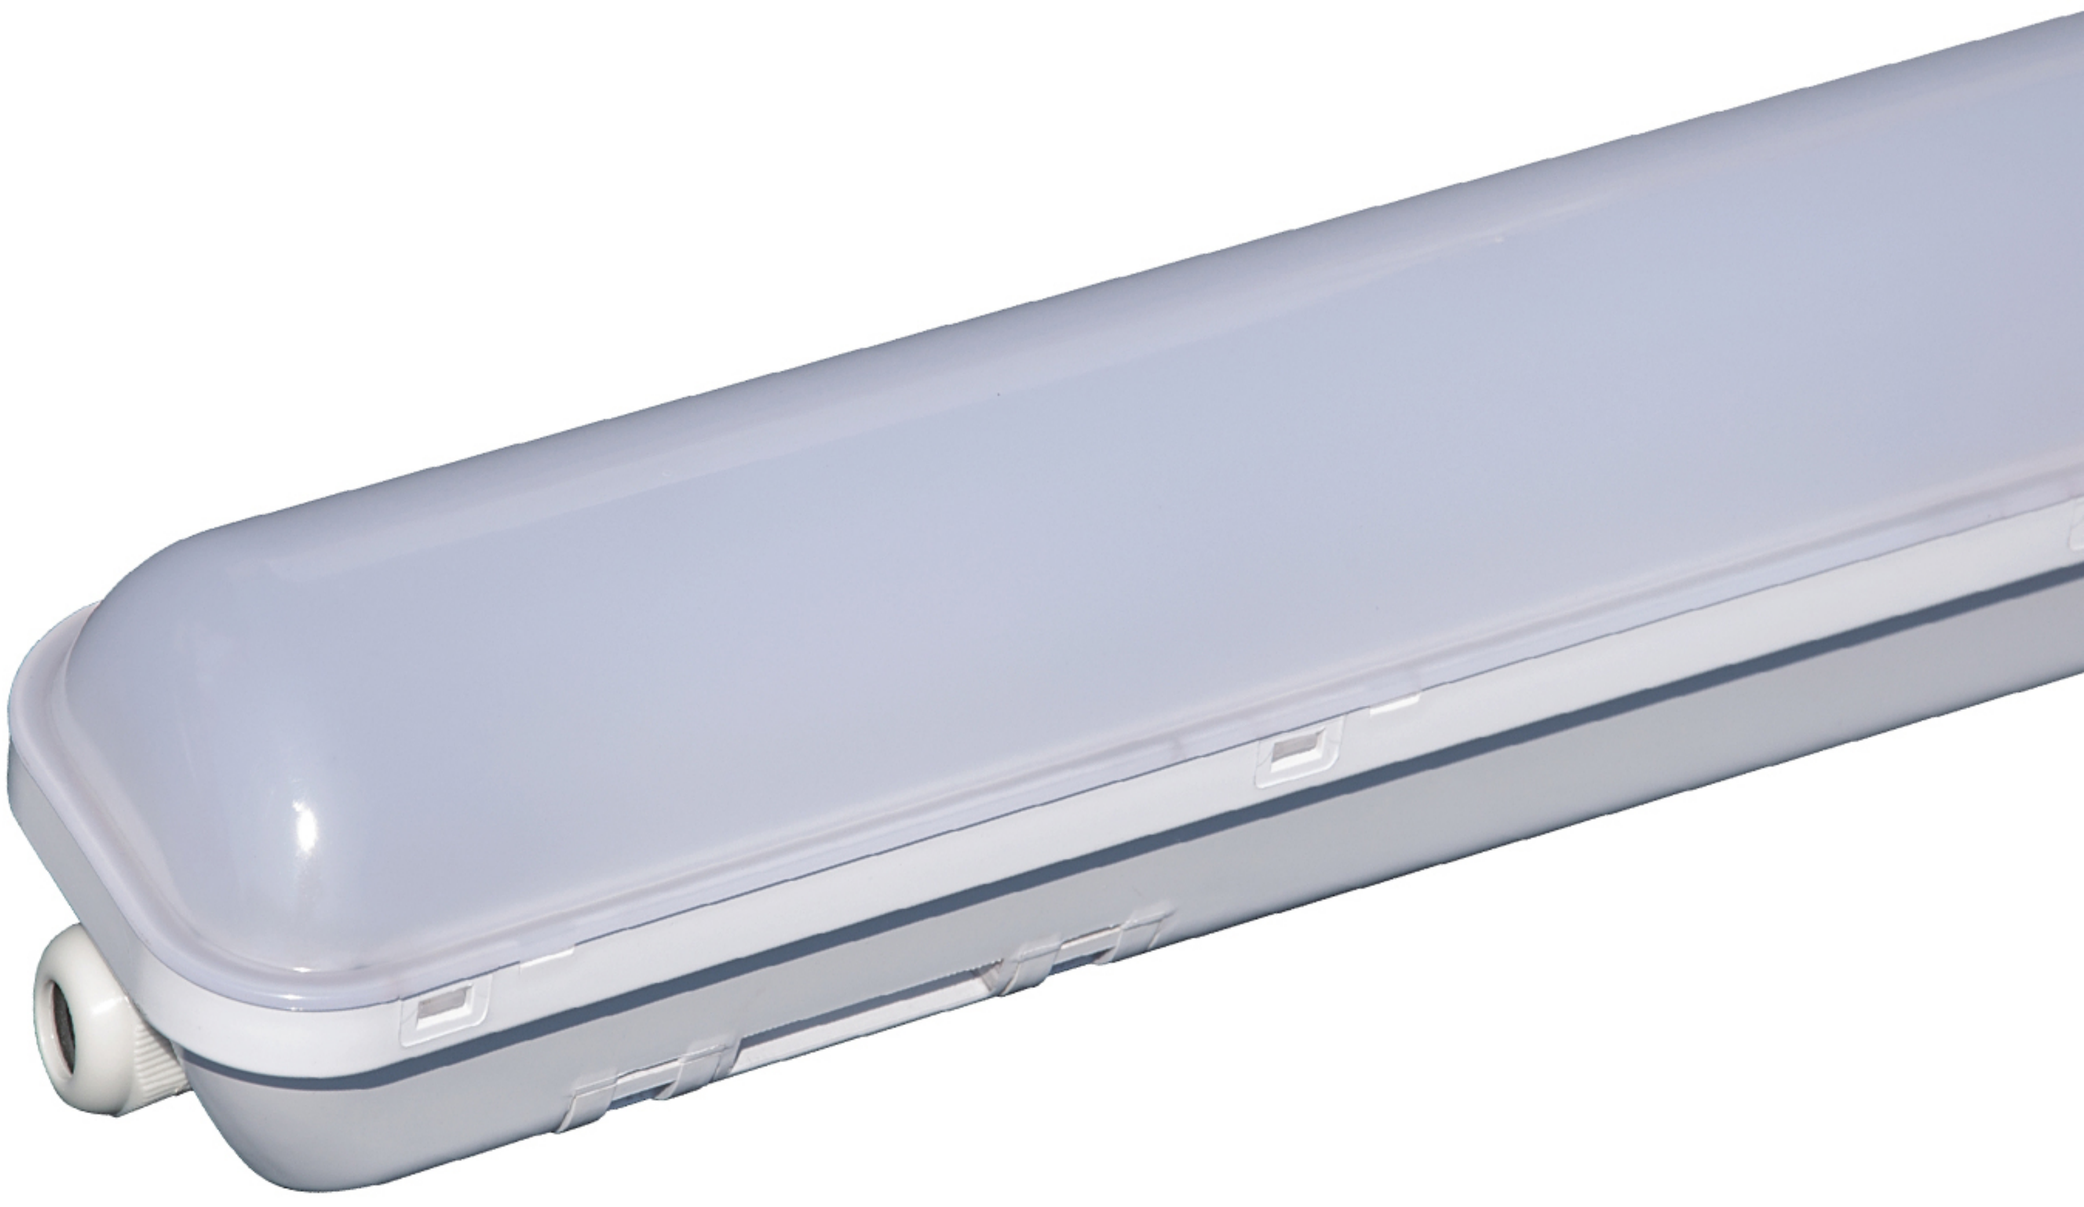

Waterproof Light

Waterproof Light

LONGLUX

Features

- Input Voltage(V): AC220-240V，50/60HZ
- CCT: 32700-6500K
- Efficiency： 110 LM/W
- CRI: >80
- Operating Ambient Temperature：-20℃~50℃
- Operating Humidity：10%-90%
- Warranty：Up to 50000 Hours



Product Description










Specification Sheet

Model	LLX-TriProof-20CX	LLX-TriProof-40CX	LLX-TriProof-60CX
Voltage	AC220-240V 50/60HZ	AC220-240V 50/60HZ	AC220-240V 50/60HZ
Watt	20W	40W	60W
IP Rating	IP 65	IP 65	IP 65
LM	2200	4400	6600
CCT	2700-6500K	2700-6500K	2700-6500K
RA	>80	>80	>80
Operating Ambient Temperature	-20℃~+50℃	-20℃~+50℃	-20℃~+50℃
Size(L*W*H)	590*86*75mm	1190*86*75mm	1490*86*75mm

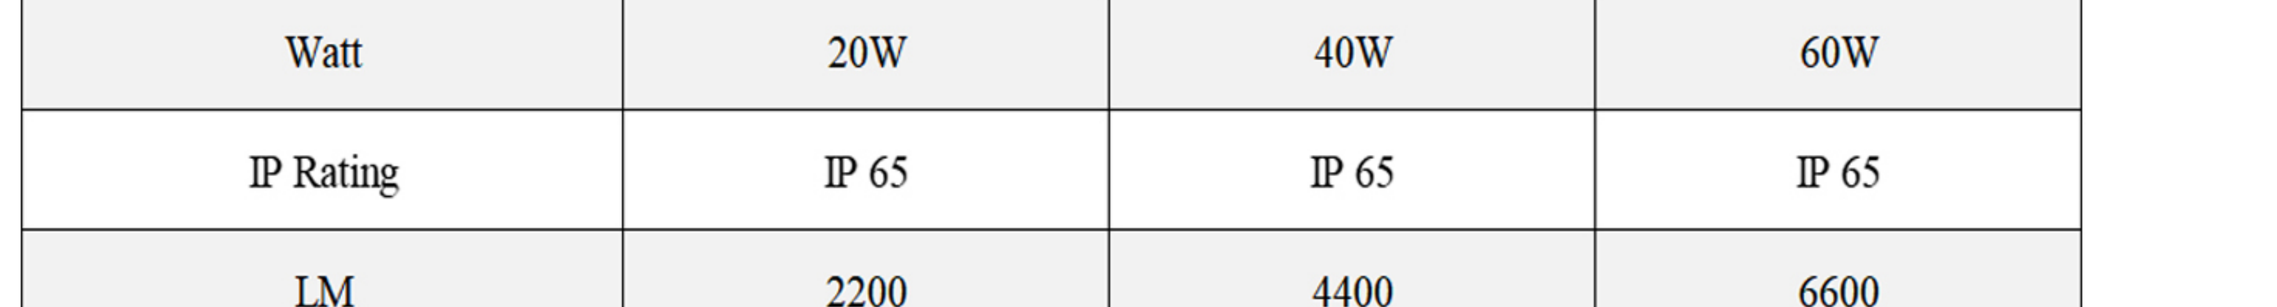

Waterproof Light

PACKAGING DATA



Model	LLX-TriProof-20CX	LLX-TriProof-40CX	LLX-TriProof-60CX
N.W./CTN	6.3	11.2	14.9
G.W./CTN	7.3	12.2	15.9
Carton Dim(L*W*H)	62*33.5*20.5	122*33.5*20.5	152*33.5*20.5
Qty/Carton(PCS)	8	8	6

Applications:

Can be used in some specific applications. Reliability and durability, High mechanical strength, Corrosion & Explosion resistant.
Saulty, acid or arrosion applications like passageway, ship, harbor, underground parking or beach projects
Industry, garages, gas station & workshops.







AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period.LONGLUX shall charge against defeats by abnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com