Triproof Lighting Fixture- X Series

LONGLUX




Waterproof Light

Waterproof Light

LONGLUX

Product Description

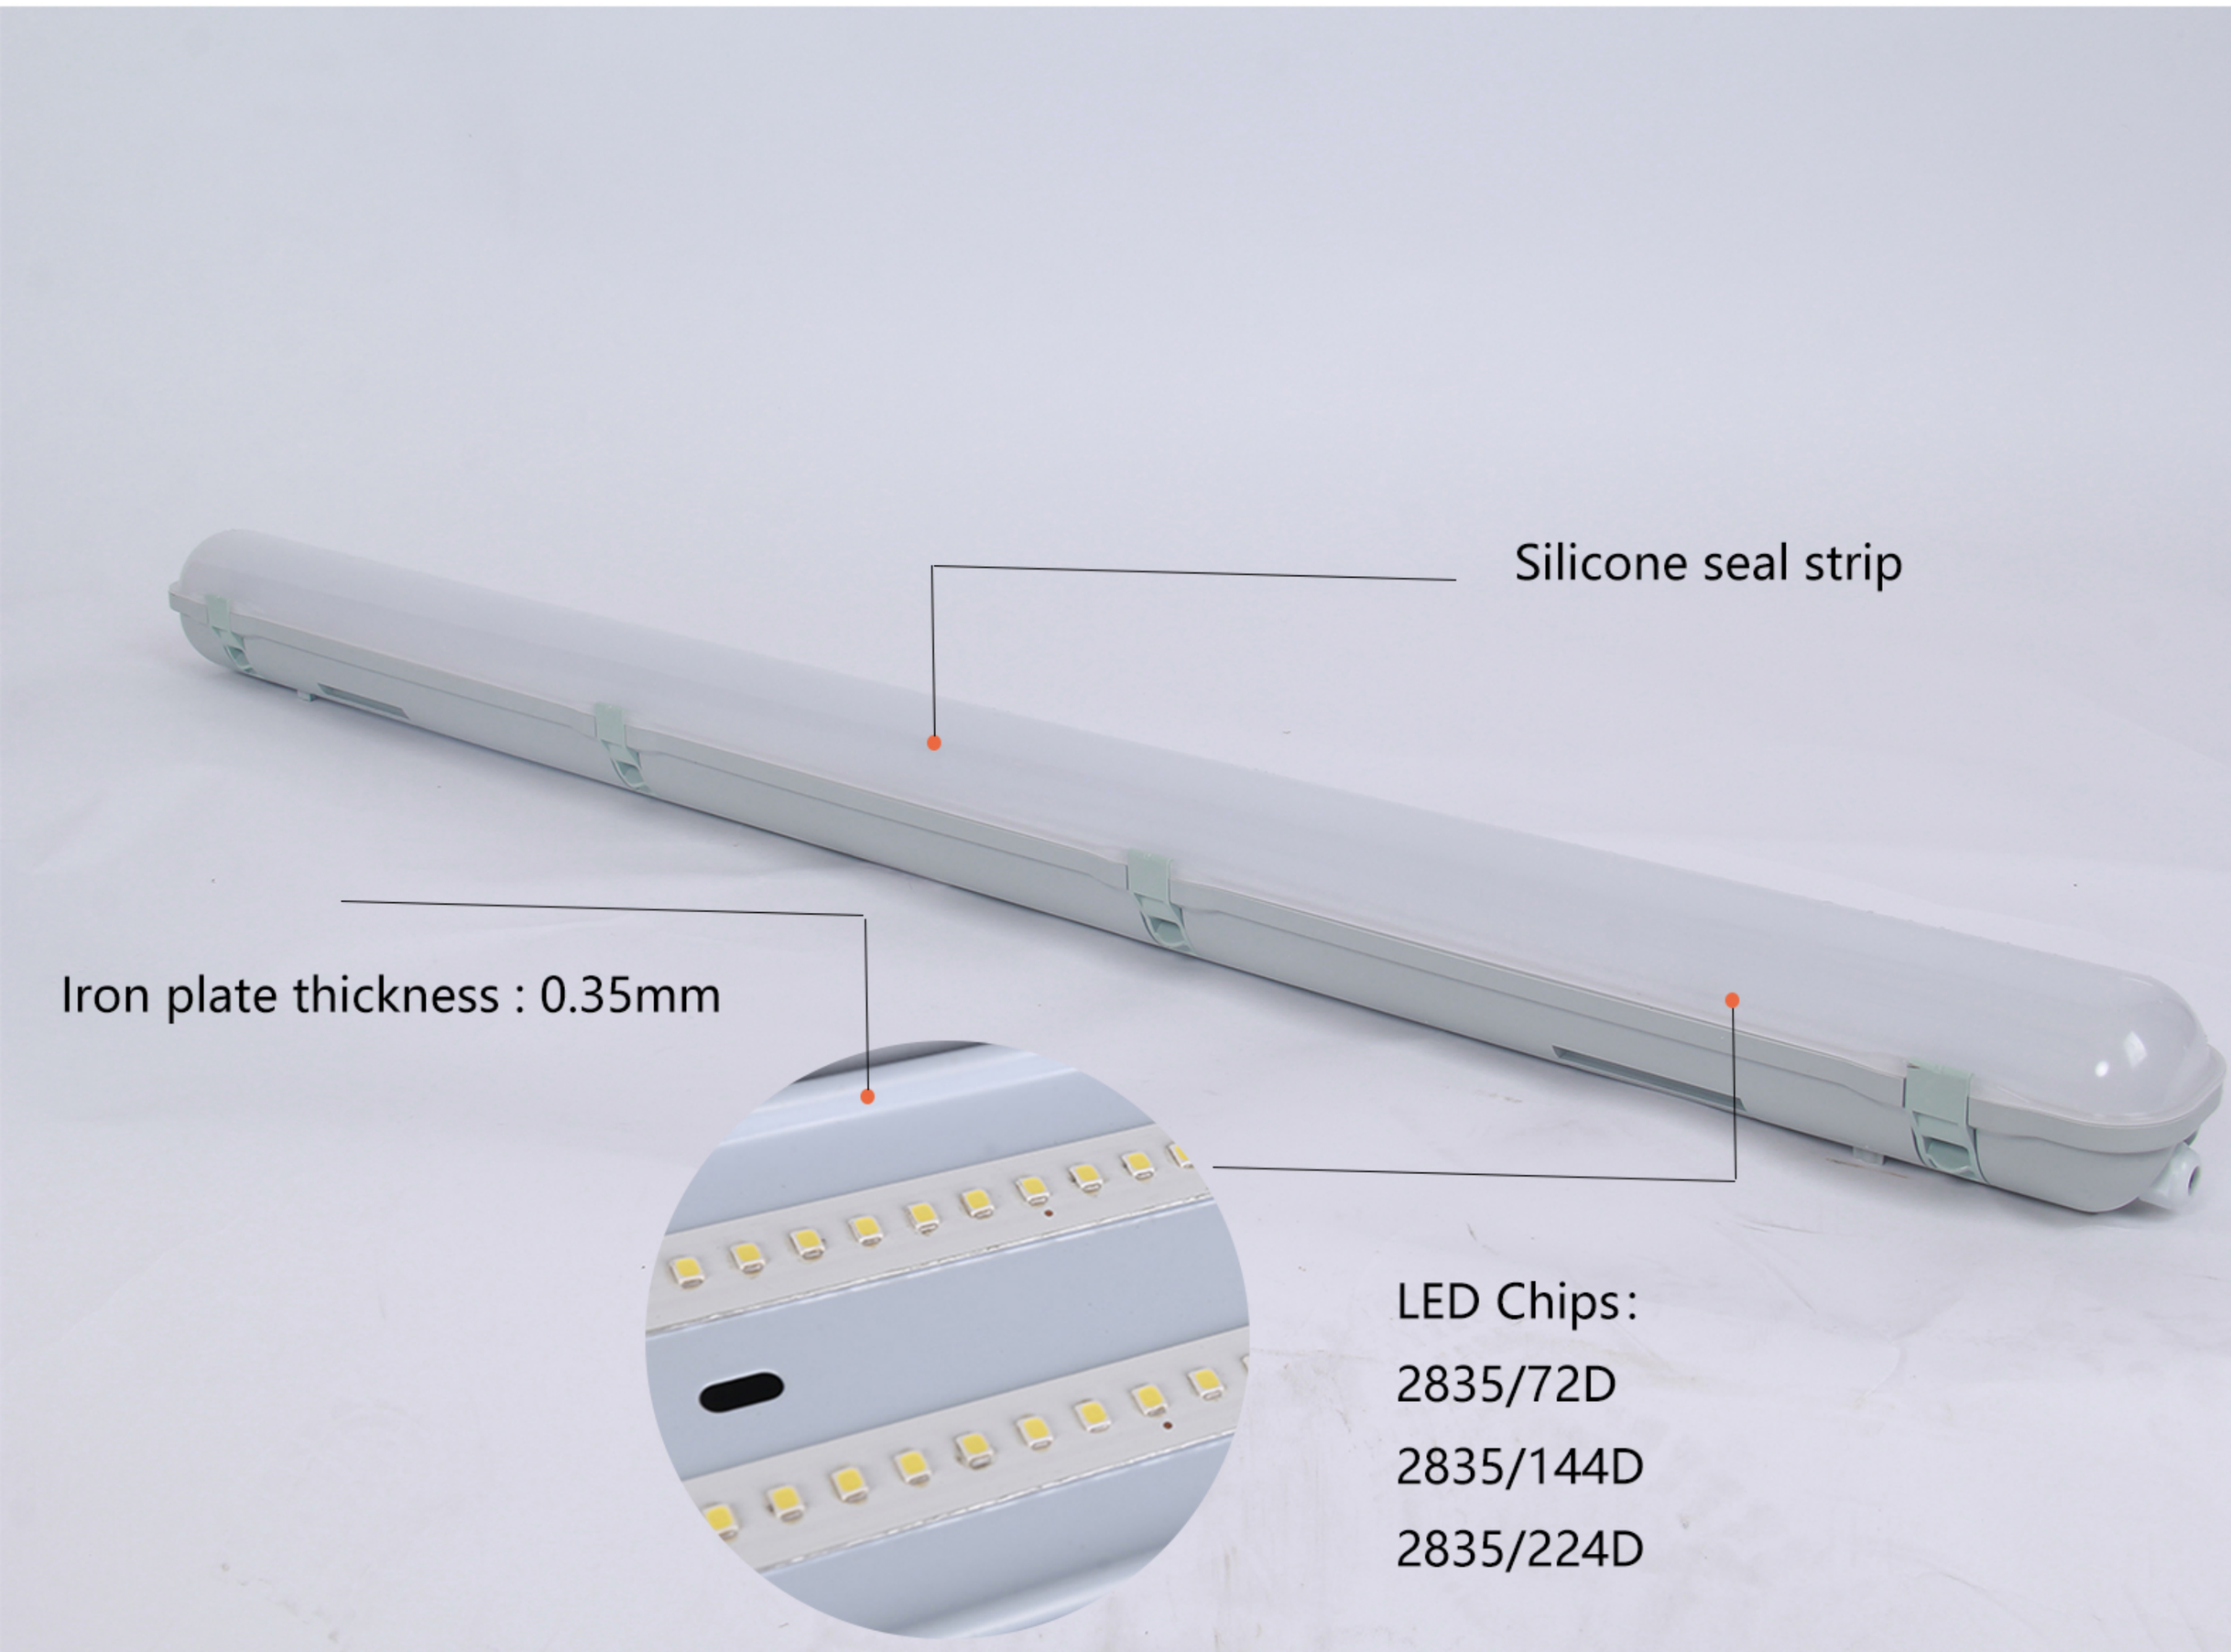

Features

- Input Voltage(V): AC220-240V，50/60HZ
- CCT: 3800-4200K; 6200-6700K
- Efficiency(LM/W): Opal Lens: 125/Clear Lens: 130
  Lens: OPAL/CLEAR
- CRI: >80
- Beam Angle: 120°
- Driver Type：OSRAM/TRIDONIC/PHILIPS/
  Chinese driver for option
- LED Chips：2835
- Gear Tray：Steel Sheet
- Operating Ambient Temperature：-20℃~50℃
- Operating Humidity：10%-90%
- Warranty：Up to 50000 Hours
  (at working temperature 25°C)
- IP Rating：IP65
- IK：IK08
- Power: 20 / 40 / 60 W
- GLOW WIRE TEST: Pass 850℃
- Material: Polycarbonate Material
- Support top cable entry

Specification Sheet

Model	LLX-TriProof-20X	LLX-TriProof-40X	LLX-TriProof-60X
Voltage	AC220-240V 50/60HZ	AC220-240V 50/60HZ	AC220-240V 50/60HZ
Watt	20W	40W	60W
IP Rating	IP 65	IP 65	IP 65
LM	2000 / 2600 / 3000	4000 / 5200 / 6000	6000 / 7800 / 9000
LED Chips	2835/72D	2835/144D	2835/224D
CCT	3800-4200K 6200-6700K	3800-4200K 6200-6700K	3800-4200K 6200-6700K
RA	>80	>80	>80
Operating Ambient Temperature	-20℃~+50℃	-20℃~+50℃	-20℃~+50℃
Size(L*W*H)	600*85*78	1200*85*78	1500*85*78
Carton Dim(L*W*H)	62.5*36*19.5	122.5*36*19.5	152.5*36*19.5
Qty/Carton(PCS)	8	8	6

Waterproof Light

PACKAGING DATA



Model	Size(L*W*H)	Carton Dim(L*W*H)	Qty/Carton(PCS)
LLX-TriProof-20X	600*85*78	62.5*36*19.5	8
LLX-TriProof-40X	1200*85*78	122.5*36*19.5	8
LLX-TriProof-60X	1500*85*78	152.5*36*19.5	6

Applications:

Can be used in some specific applications. Reliability and durability, High mechanical strength, Corrosion & Explosion resistant.
Saulty, acid or arrosion applications like passageway, ship, harbor, underground parking or beach projects
Industry, garages, gas station & workshops.







AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period.LONGLUX shall charge against defeats by abnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com