# Stainless Steel Housing Series

LONGLUX







































# Triple Proof Light

LONGLUX




## Features

- Base: stainless steel 304, can upgrade to 316
- Cover: toughened glass, it's fixed to the body with the help of a shell
- Sealing: silicone rubber
- Lock: stainless steel
- Installation: installation individually. Mounting on the mounting surface with hangers

## Dimension



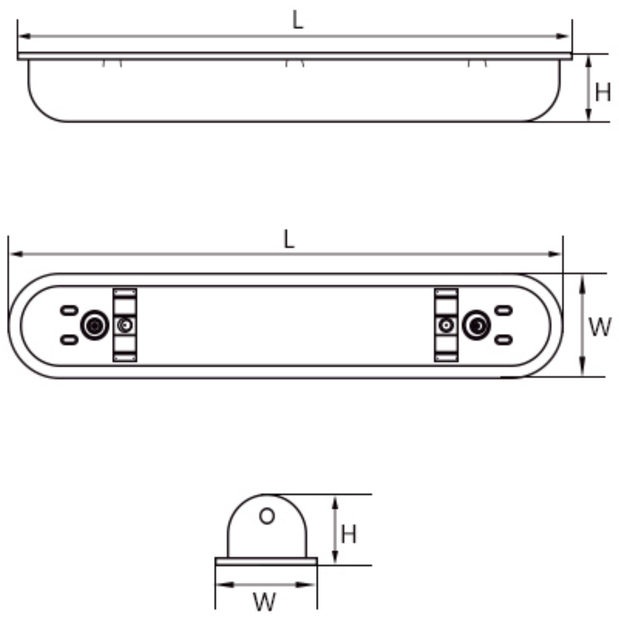





## Specification Sheet

| Model No. | Watt(W) | IP Rating | N.W (Kg/Ctn) | G.W. (Kg/Ctn) | Product Size (L*W*H) (MM) | Base | Cover |
|---|---|---|---|---|---|---|---|
| LLX-TriProof-SS-118 | 1*18 | IP65 | 2.8 | 3.0 | 700*140*90 | Stainless steel | toughened glass |
| LLX-TriProof-SS-218 | 2*18 | IP65 | 3.5 | 3.8 | 700*190*90 | Stainless steel | toughened glass |
| LLX-TriProof-SS-136 | 1*36 | IP65 | 4.7 | 5.0 | 1300*140*90 | Stainless steel | toughened glass |
| LLX-TriProof-SS-236 | 2*36 | IP65 | 6.0 | 6.8 | 1300*190*90 | Stainless steel | toughened glass |
| LLX-TriProof-SS-158 | 1*58 | IP65 | 6.0 | 6.4 | 1600*140*90 | Stainless steel | toughened glass |
| LLX-TriProof-SS-258 | 2*58 | IP65 | 7.0 | 8.1 | 1600*190*90 | Stainless steel | toughened glass |


## Install Instructions

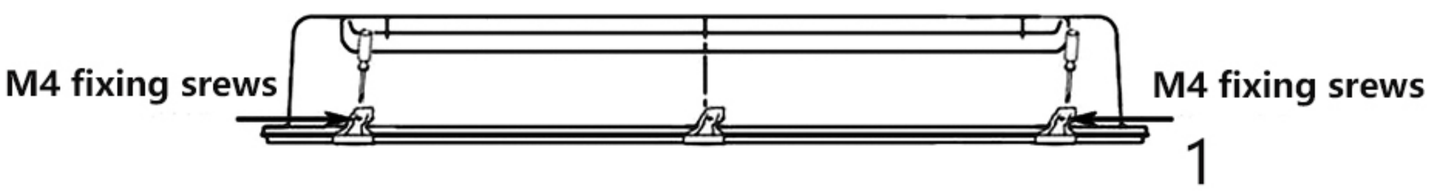




**Remarks:**


1. There are 4 pieces of M4 fixing screws in the accessory bag, these are for optional use.
2. Unscrew the 4 M4 fixing screws in the fitting before attempting to open it.
3. Tighten the 4 M4 fixing screws back into place after wiring the fitting.

**The gear tray and the glass have been removed**

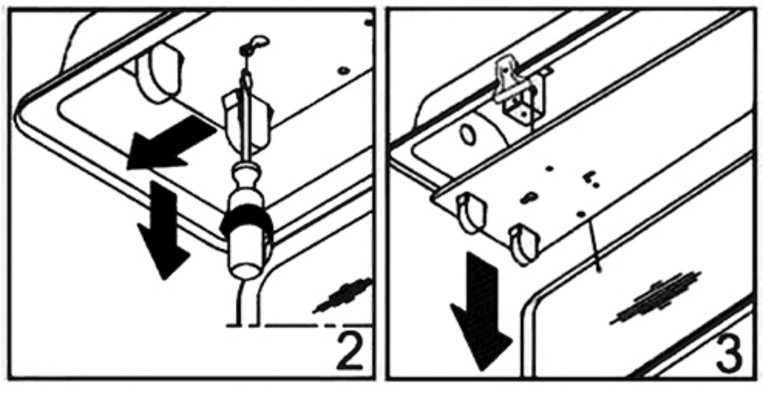

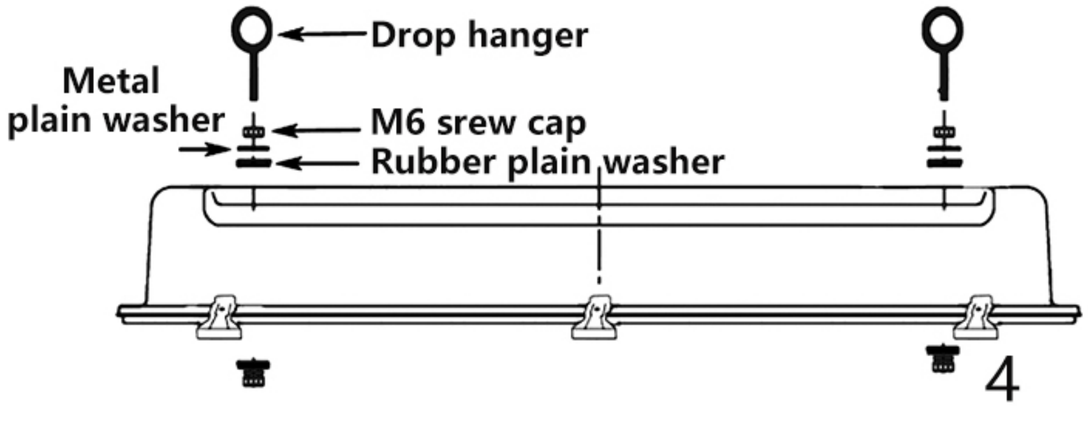
## NOTES:

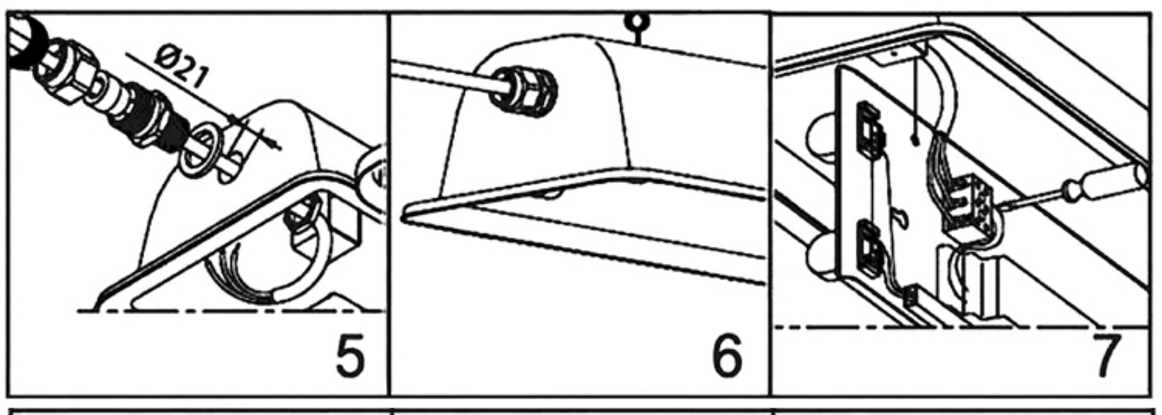- ➤ Make sure the luminaries are installed and fitted by a qualified electrician ensuring the installation complies to the current.
- ➤ National Electrical Code and all local codes.
- ➤ Ensure all electrical connections are secure & that there are no loose strands.
- ➤ This is a Class I product and must be earthed.
- ➤ Make sure that the fixings are adequate to support the weight of the fitting.
- ➤ Before installation or maintenance, turn off electric power and allow the fitting to be cool.
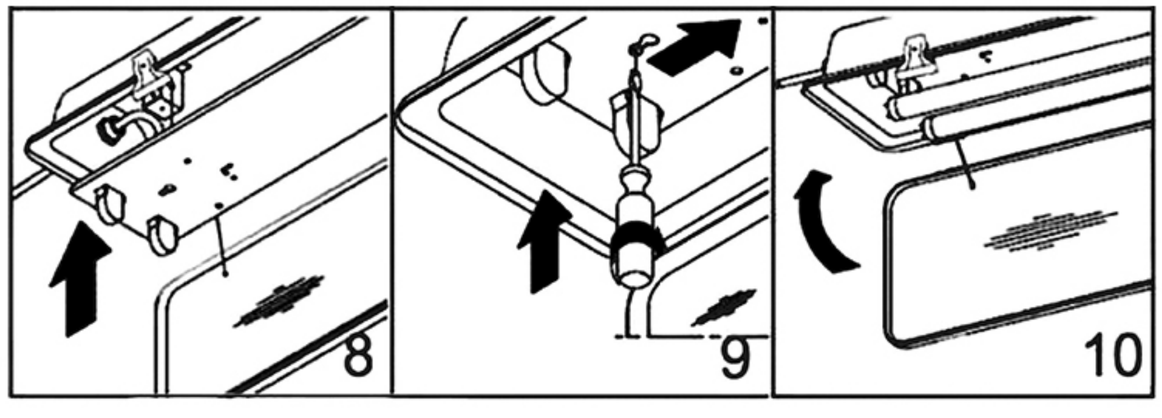
## WIRING INSTRUCTION OF MAIN CABLE:



black(or brown)line —— connect live wire
white(or blue)line —— connect neutral wire
green(or yellow-green)line —— connect earth wire

## ⚠ WARNING:

The product must be grounded and installed in accordance with the National Electrical Code and all local codes
Failure to do so may increase the RISH OF PERSONAL INJURY, PROPERTY DAMAGE, FIRE AND DEATH

# Triple Proof Light

LONGLUX

## PACKAGING DATA

1PCS/CTN




| Model No. | Power (W) | Q'ty/Ctn | N.W (Kg/Ctn) | G.W. (Kg/Ctn) | Carton Dim (L*W*H) (MM) |
|---|---|---|---|---|---|
| LLX-TriProof-SS-118 | 1*18(W) | 1 | 2.8 | 3.0 | 750*195*145 |
| LLX-TriProof-SS-218 | 2*18(W) | 1 | 3.5 | 3.8 | 750*245*145 |
| LLX-TriProof-SS-136 | 1*36(W) | 1 | 4.7 | 5.0 | 1350*195*145 |
| LLX-TriProof-SS-236 | 2*36(W) | 1 | 6.0 | 6.8 | 1350*245*145 |
| LLX-TriProof-SS-158 | 1*58(W) | 1 | 6.0 | 6.4 | 1650*195*145 |
| LLX-TriProof-SS-258 | 2*58(W) | 1 | 7.0 | 8.1 | 1650*245*145 |

## Applications:

Can be used in some specific applications. Reliability and durability, High mechanical strength, Corrosion & Explosion resistant.
Saulty, acid or arrosion applications like chicken farm, ship, harbor, chemical factory or beach projects
Industry, garages, gas station & workshops.



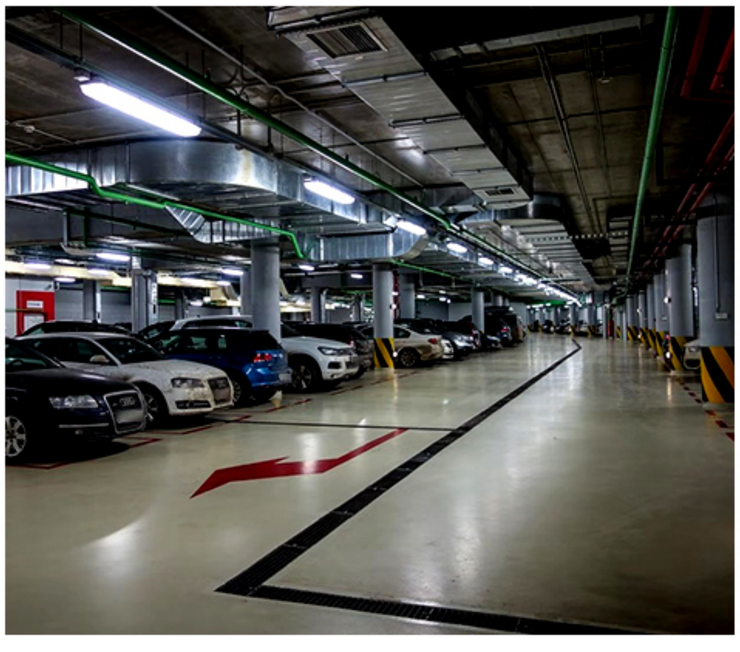



## AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period.LONGLUX shall charge against defeats by abnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com