Stainless Steel Housing Series

LONGLUX





Triple Proof Light

Feature

- IP67 Stainless steel waterproof light, Industrial class PC diffuser designed for effectively reduces glare and improve the intensity
- High Intense and ductility Base, Drawing procedure, Ik10 level,3 optional: SUS304、SUS316、Iron
- Quality Environmental PC Material, High transparency and Corrosion resistant,3 optional: clear、opal and tempered glass
- Intense SS304 Inox Clip, wielding procedure with Anti-loosen screw structure
- There are LED tube version and SMD chip version, quick replacement of the LED array, It can apply to both emergency module and sensor system
- Easy to install and maintain, Various of mouting, like ceiling、pendant、chain、cord etc, Various of mounting bracket, Low maintenance cost,
- IP67 Inox cable gland, Use advanced production technology management system to ensure the quality of our products


Product Description

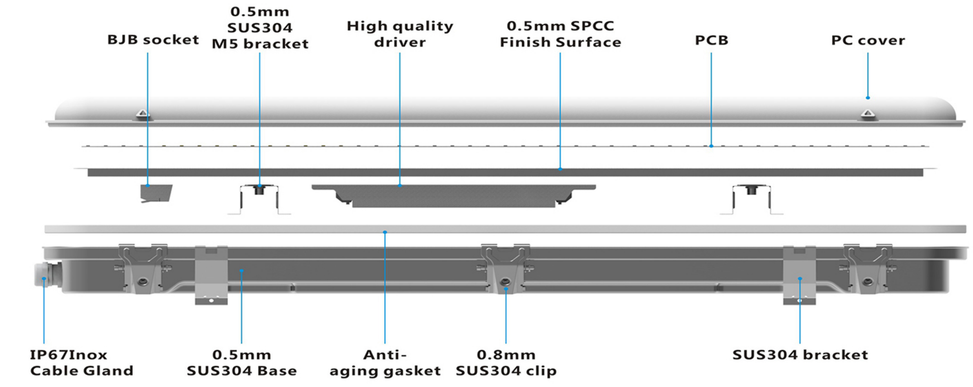

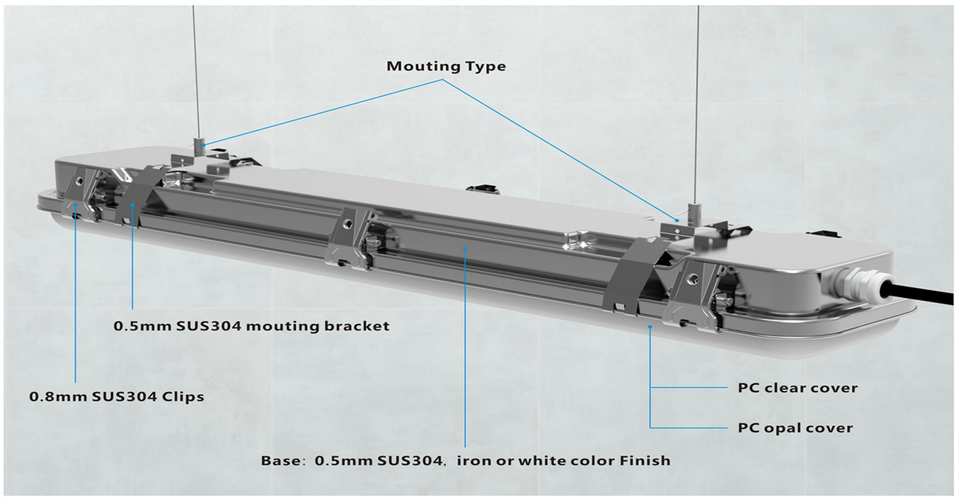

Emergency Module



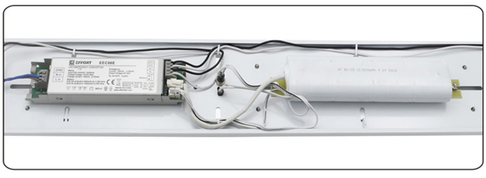

Sensor Module





Respirator




M8 rivet



Specification Sheet

Model no.	Power(W)	L*W*H*L1(MM)	LF(MM)	Lumen Effciency(LM/W)	Emergency	Cover	Input(V)	CCT(K)	Impact	Driver	Lifespan(H)	Operating Temp
LLX-Triproof-SS-S20W	20	678*141*50*686.5	430~450	100~130	/	tempered glass milky cover	220~240	4000K 5000K 6500K	IK10	PHILIPS	50000~100000	-20℃~40℃
LLX-Triproof-SS-S40W	40	1283*141*50*1291.5	970~990	100~130	1.5h 2h 3h							
LLX-Triproof-SS-S60W	60	1583*141*50*1591.5	1270~1290	100~130								
LLX-Triproof-SS-T20W	20	678*110*68*686.5	430~450	120~130		clear PC opal PC						
LLX-Triproof-SS-T20W-1	20	678*141*68*686.5	430~450	120~130								
LLX-Triproof-SS-T25W	25	1283*110*68*1291.5	970~990	120~130								
LLX-Triproof-SS-T40W	40	1283*141*68*1291.5	970~990	120~130								
LLX-Triproof-SS-T30W	30	1583*110*68*1591.5	1270~1290	120~130								
LLX-Triproof-SS-T60W	60	1583*141*68*1591.5	1270~1290	120~130								


Install Instructions

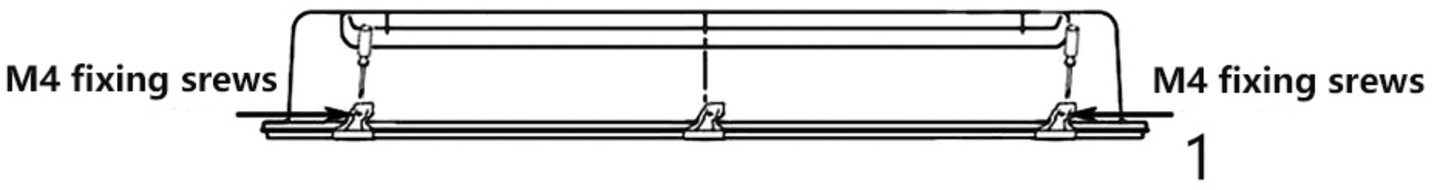


1

Remarks:

1. There are 4 pieces of M4 fixing screws in the accessory bag, these are for optional use.
2. Unscrew the 4 M4 fixing screws in the fitting before attempting to open it.
3. Tighten the 4 M4 fixing screws back into place after wiring the fitting.

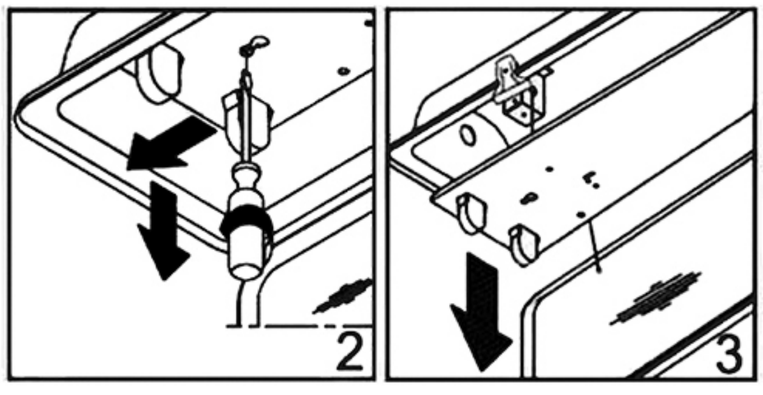

2

3

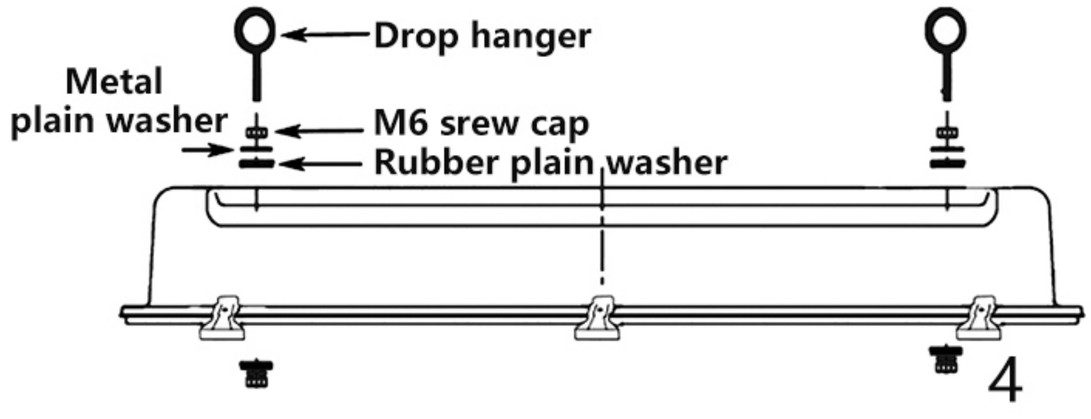



4


The gear tray and the glass have been removed

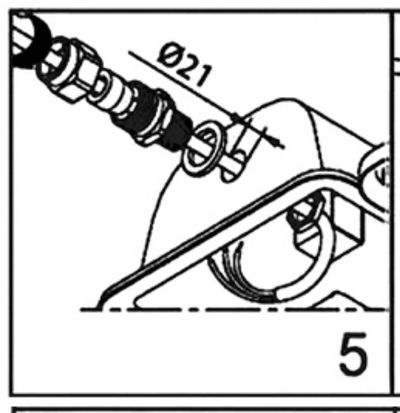



5

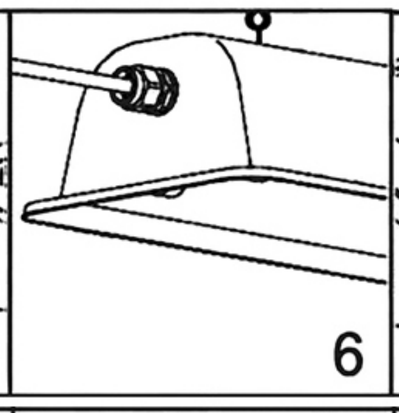
6

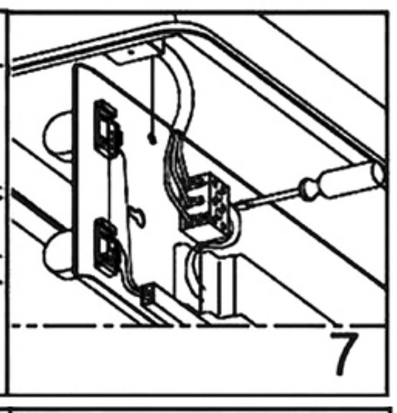
7

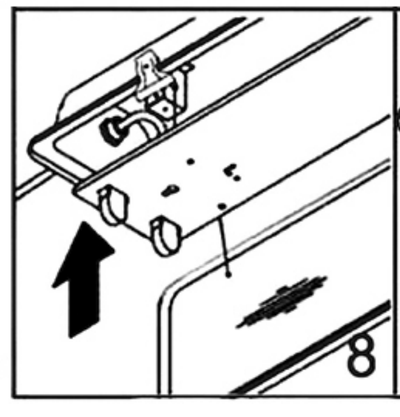
8

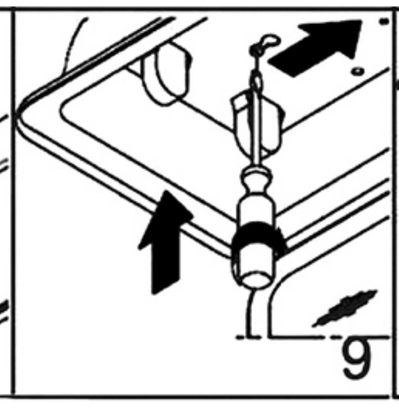
9

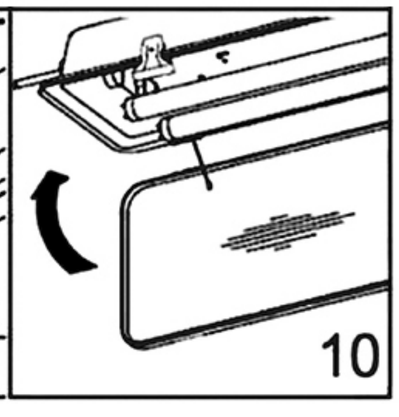
10

NOTES:

- ➤ Make sure the luminaries are installed and fitted by a qualified electrician ensuring the installation complies to the current.
- ➤ National Electrical Code and all local codes.
- ➤ Ensure all electrical connections are secure & that there are no loose strands.
- ➤ This is a Class I product and must be earthed.
- ➤ Make sure that the fixings are adequate to support the weight of the fitting.
- ➤ Before installation or maintenance, turn off electric power and allow the fitting to be cool.

WIRING INSTRUCTION OF MAIN CABLE:



black(or brown)line —— connect live wire
white(or blue)line —— connect neutral wire
green(or yellow-green)line —— connect earth wire

⚠ WARNING:

The product must be grounded and installed in accordance with the National Electrical Code and all local codes
Failure to do so may increase the RISH OF PERSONAL INJURY, PROPERTY DAMAGE, FIRE AND DEATH


Triple Proof Light

LONGLUX

PACKAGING DATA

1 PCS/CTN



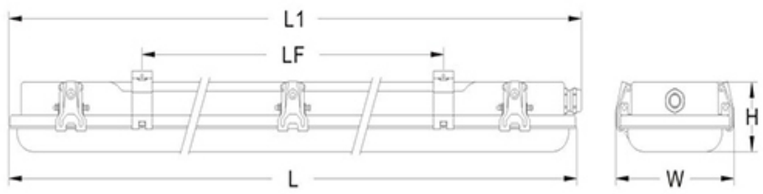


Model no.	L*W*H*L1(MM)	LF(MM)
LLX-Triproof-SS-S20W	678*141*50*686.5	430~450
LLX-Triproof-SS-S40W	1283*141*50*1291.5	970~990
LLX-Triproof-SS-S60W	1583*141*50*1591.5	1270~1290

Model no.	L*W*H*L1(MM)	LF(MM)
LLX-Triproof-SS-T20W	678*110*68*686.5	430~450
LLX-Triproof-SS-T20W-1	678*141*68*686.5	430~450
LLX-Triproof-SS-T25W	1283*110*68*1291.5	970~990
LLX-Triproof-SS-T40W	1283*141*68*1291.5	970~990
LLX-Triproof-SS-T30W	1583*110*68*1591.5	1270~1290
LLX-Triproof-SS-T60W	1583*141*68*1591.5	1270~1290

Applications:

Can be used in some specific applications. Reliability and durability, High mechanical strength, Corrosion & Explosion resistant.
Saulty, acid or arrosion applications like chicken farm, ship, harbor, chemical factory or beach projects
Industry, garages, gas station & workshops.



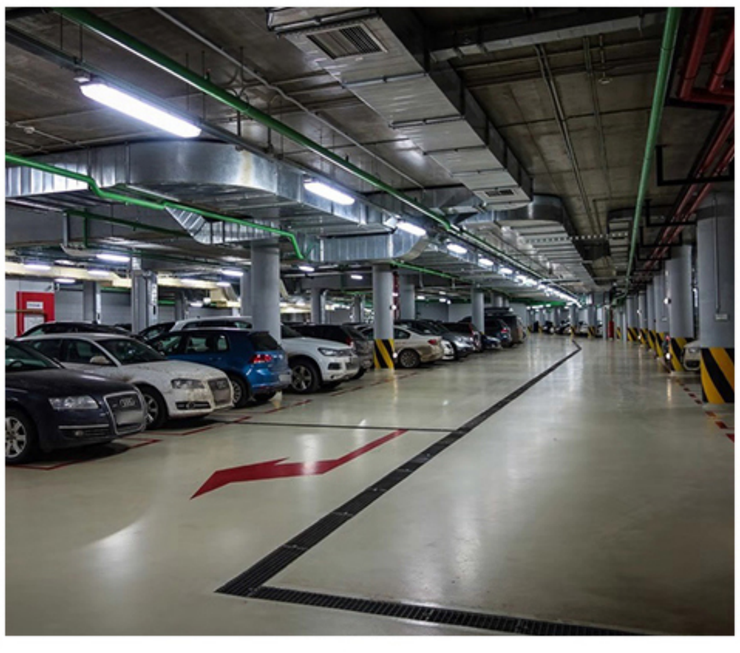



AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period.LONGLUX shall charge against defeats by abnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com