LED Tube Series

LONGLUX




LED Tube

Features

- Easy to install
- Frost and glass diffuser that prevents glare
- Energized for one side
- Lumen EFFI.: 100-150LM/W
- CRI: 70 / 80
- P.F.: 0.5 / 0.9

Product Description

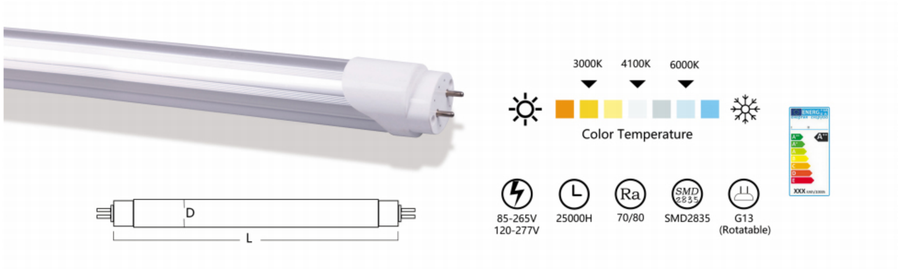






Specification Sheet

Model No.	LED Chip SMD (PCS)	Rated Power (W)	Power EQV (W)	Input Voltage (V)	Dimension (MM)
LLX- T8A02-9	2835 48	9	18	85-265	26*590
LLX- T8A02-10	2835 60	10	18	85-265	26*590
LLX- T8A03-12	2835 72	12	30	85-265	26*895
LLX- T8A04-18	2835 96	18	36	85-265	26*1199
LLX- T8A04-20	2835 120	20	36	85-265	26*1199
LLX- T8A04-22	2835 132	22	36	85-265	26*1199
LLX- T8A05-24	2835 144	24	58	85-265	26*1499
LLX- T8A08-36	2835 196	36/40	100	85-265	26*2473

PACKAGING DATA


1PCS/CTN

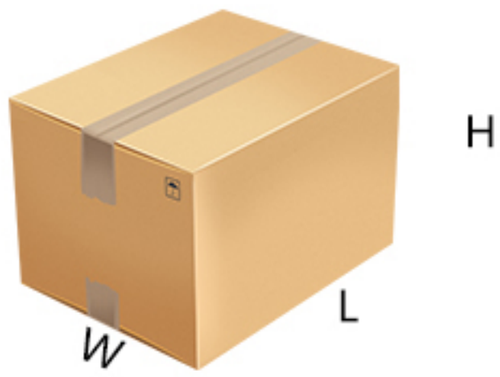

Model No.	PCS/CTN	CTN Meas
LLX- T8A02-9	25	64*21.5*22
LLX- T8A02-10	25	64*21.5*22
LLX- T8A03-12	25	94**21.5*22
LLX- T8A04-18	25	124*21.5*22
LLX- T8A04-20	25	124*21.5*22
LLX- T8A04-22	25	124*21.5*22
LLX- T8A05-24	25	154*21.5*22
LLX- T8A08-36	25	243*21.5*22

Applications:

Office, Home, Public buildings, Shopping malls, Historic Areas etc,

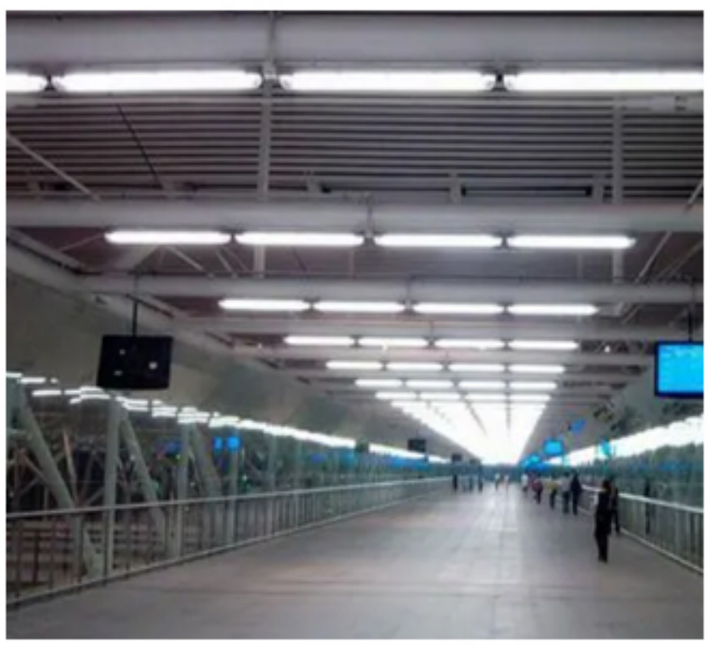





AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period. LONGLUX shall charge against defeats byabnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com