T8 Motion Detective LED Tube

LONGLUX



No Flicker | Dimmable Option | Ra70/80 | 25000h | S:180-265V | For Indoor | 320° | 0.5 | 0.7




Features

- Recommended Installation height of 3-4.5m with sensor radius of 5-8m
- Triggered Instant Start with Customizable Sleep Time (Standard 45s, max 3 mins)
- Sleeping Brightness Customizable (Standard 3W, 1-10W Feasible)
- High Frequency Sensor Module of High Sensitivity to Human Body
- Sleeping Setting Allows Energy Saving up to 95%


Product Description



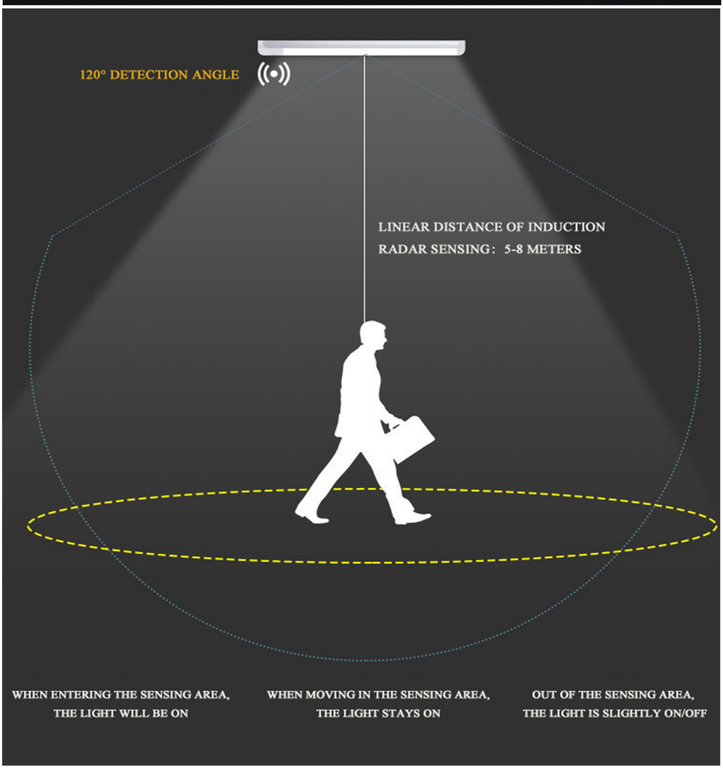

Product Details



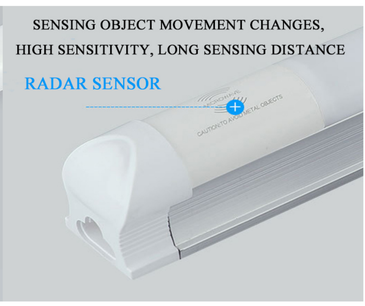





Specification Sheet

Model No.	Power (W)	LM/W	Voltage (V)	CCT (K)	Dimension (MM)
LLX-Tube-T8S-E18	18	80-160	180-265	6500	Φ26x1199

LED TUBE

PACKAGING DATA



Model No.	Dimension(MM)	PCS/CTN	CTN MEAS(CM)
LLX-Tube-T8S-E18	Φ26x1199	25	123.5x17x17.5

Applications:

Can be used in some specific applications. Reliability and durability, High mechanical strength,
Corrosion & Explosion resistant.
Saulty, acid or arrosion applications like passageway, ship, harbor, underground parking or beach projects
Industry, garages, gas station & workshops.







AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period.LONGLUX shall charge against defeats by abnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com