LED Tube Series


LONGLUX




Features


- Easy to install
- Frost and PC diffuser that prevents glare
- Both single ended and double ended are acceptable
- Lumen EFFI.: 100-150LM/W
- CRI: 70 / 80
- P.F.: 0.5/ 0.9

Product Description

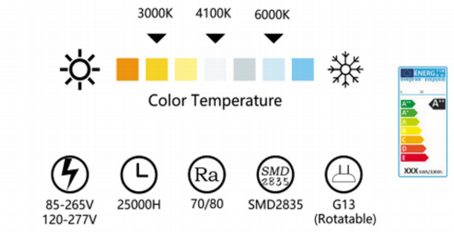

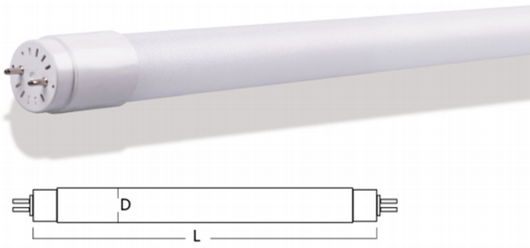



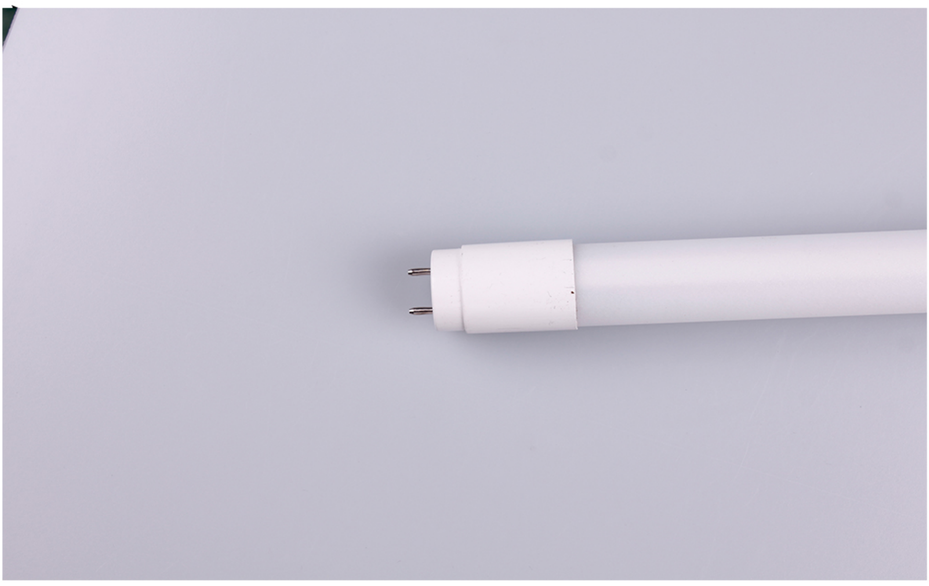


Specification Sheet

Model No.	LLX-Tube-2FT-9W	LLX-Tube-3FT-12W	LLX-Tube-4FT-18W	LLX-Tube-5FT-22W	LLX-Tube-102PX-B（Type B）	LLX-Tube-104PX-B（Type B）	LLX-Tube-104PX-DLM-B（Type B）	LLX-Tube-104PX-A（Type A）	LLX-Tube-104PX-AB（Type A+ B）
LED Chip SMD (PCS)	2835 48	2835 72	2835 96	2835 120	2835 48	2835 96	2835 96	2835 96	2835 96
Rated Power (W)	9	12	18	22	9	18	18	18	18
Power EQV (W)	18	30	36	58	17	32	32	32	32
Input Voltage (V)	S:180-265 U:85-265	S:180-265 U:85-265	S:180-265 U:85-265	S:180-265 U:85-265	U:120-277V	U:120-277V	U:120-277V	U:120-277V	U:120-277V
Lumen EFFI. (LM/W)	80-120	80-120	80-120	80-120	100-120	100-120	100-120	100-120	100-120
Color TEMP. (K)	3000-6500	3000-6500	3000-6500	3000-6500	3000-6500	3000-6500	3000-6500	3000-6500	3000-6500
CRI	80	80	80	80	80	80	80	80	80
P.F.	0.5 / 0.9	0.5 / 0.9	0.5 / 0.9	0.5 / 0.9	0.9	0.9	0.9	0.9	0.9
Cap	Plastic(G13)	Plastic(G13)	Plastic(G13)	Plastic(G13)	Plastic(G13)	Plastic(G13)	Plastic(G13)	Plastic(G13)	Plastic(G13)

PACKAGING DATA


1PCS/CTN

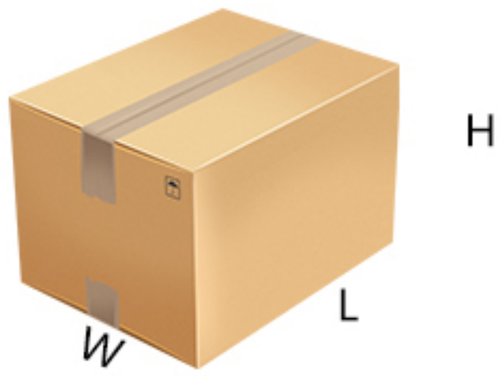

Model No.	PCS/CTN	CTN Meas	Dimension (MM)
LLX-Tube-2FT-9W	25	65*17.5*18.5	26*590
LLX-Tube-3FT-12W	25	95*17.5*18.5	26*895
LLX-Tube-4FT-18W	25	125*17.5*18.5	26*1199
LLX-Tube-5FT-22W	25	155*17.5*18.5	26*1499
LLX-Tube-102PX-B（Type B）	25	65*17.5*18.5	26*590
LLX-Tube-104PX-B（Type B）	25	125*17.5*18.5	26*1199
LLX-Tube-104PX-DLM-B	25	125*17.5*18.5	26*1199
LLX-Tube-104PX-A（Type A）	25	125*17.5*18.5	26*1199
LLX-Tube-104PX-AB（Type A+ B）	25	125*17.5*18.5	26*1199

Applications:

Office, Home, Public buildings, Shopping malls, Historic Areas etc,

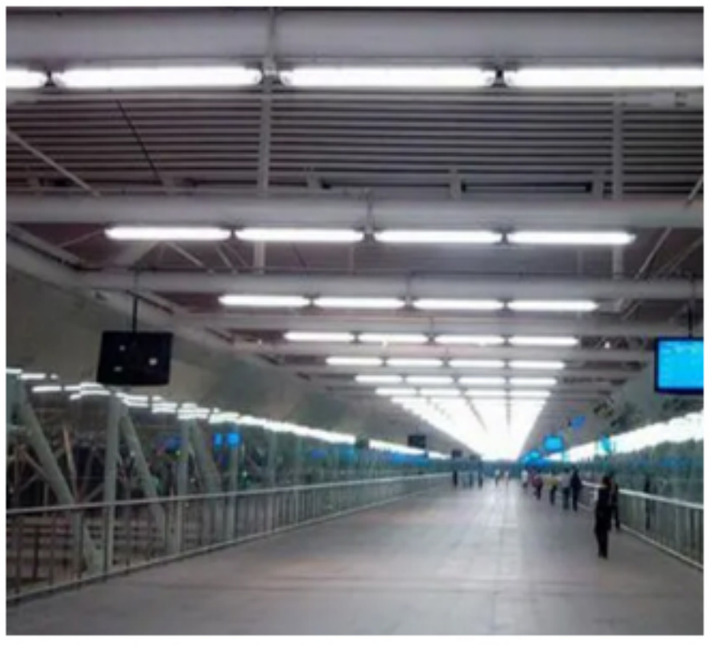





AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period. LONGLUX shall charge against defeats byabnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com