
Triproof Lighting Fixture- CCT&Power Select

LONGLUX

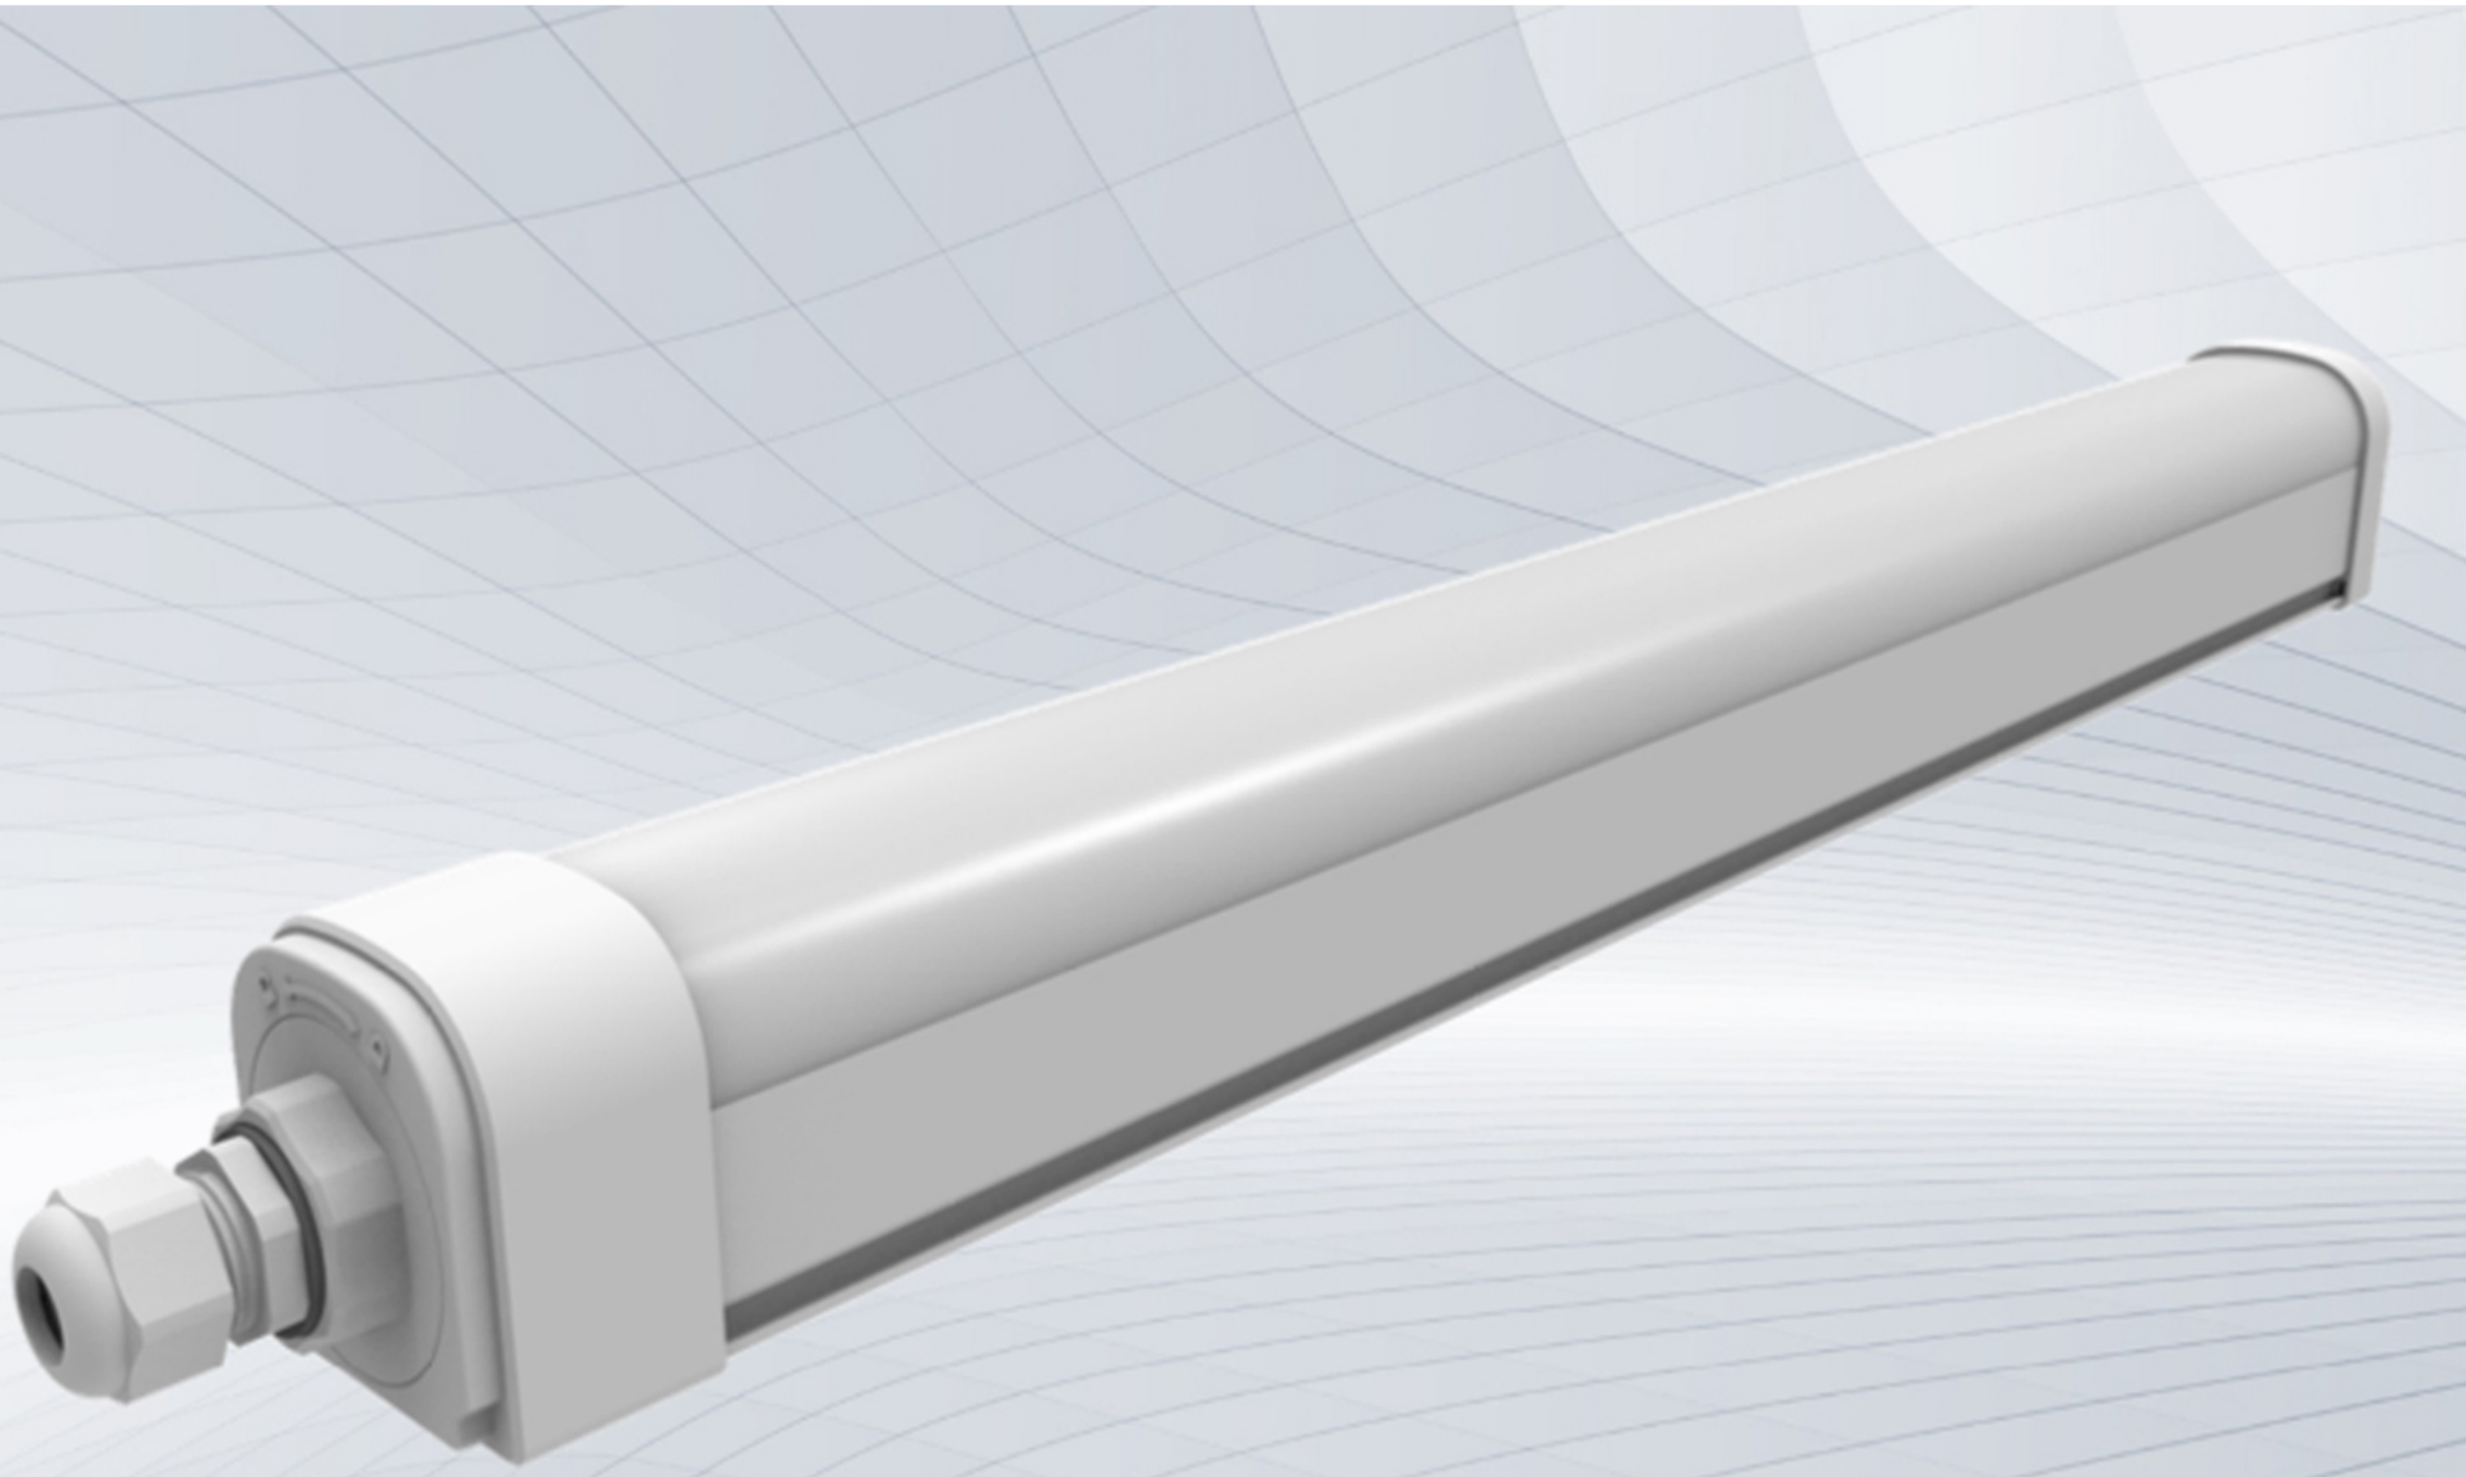

Waterproof Light

LED Waterproof Light

LONGLUX

Features

- CCT select & Power select
- Housing: ABS or PC, with good mechanical performance
- Body and diffuser meet IK08 and 850°C glow wire test requirement
- Clips: PC or Stainless Steel, ensuring IP65 of the lighting fixture
- Reflector: Painted Iron plate, easy installation and maintenance
- Throughing wires option, with one fast 3 holes terminal block, one normal M20 cable gland.
- Cover: PS or PC, with higher light transmittance

Product Description



CLASS I CCT Select Linkable Power Select

Specification Sheet

Model	Product size LxDxH (mm)	Description	Power	Lumen	Protection class	Colour Temp	CRI	Driver PF	Life time hours	Warranty
LLX-Triproof-Integrated-18	681*58*62	Throughing wires option	18W	2160lm	Class I	4000K	>80	0.9	30000	3 years
LLX-Triproof-Integrated-36	1281*58*62		36W	4320lm	Class I	4000K	>80	0.9	30000	3 years
LLX-Triproof-Integrated-50	1581*58*62		50W	6000lm	Class I	4000K	>80	0.9	30000	3 years
LLX-Triproof-Integrated-18-TC	681*58*62	Throughing wires option, with colour change	18W	2160lm	Class I	3000K 4000K 6500K	>80	0.9	30000	3 years
LLX-Triproof-Integrated-36-TC	1281*58*62		36W	4320lm	Class I	3000K 4000K 6500K	>80	0.9	30000	3 years
LLX-Triproof-Integrated-50-TC	1581*58*62		50W	6000lm	Class I	3000K 4000K 6500K	>80	0.9	30000	3 years
LLX-Triproof-Integrated-18-TP-TC	681*58*62	Throughing wires option, with power change and colour change	9-18W	2160lm	Class I	3000K 4000K 6500K	>80	0.9	30000	3 years
LLX-Triproof-Integrated-36-TP-TC	1281*58*62		18-36W	4320lm	Class I	3000K 4000K 6500K	>80	0.9	30000	3 years
LLX-Triproof-Integrated-50-TP-TC	1581*58*62		25-50W	6000lm	Class I	3000K 4000K 6500K	>80	0.9	30000	3 years

LED Waterproof Light

LONGLUX

PACKAGING DATA



Model	Qty/ Ctn	Outer carton size LxWxH (cm)		
LLX-Triproof-Integrated-18 LLX-Triproof-Integrated-18-TC LLX-Triproof-Integrated-18-TP-TC	15	65.0	20.5	35.5
LLX-Triproof-Integrated-36 LLX-Triproof-Integrated-36-TC LLX-Triproof-Integrated-36-TP-TC	12	125.0	20.5	28.7
LLX-Triproof-Integrated-50 LLX-Triproof-Integrated-50-TC LLX-Triproof-Integrated-50-TP-TC	9	155.0	20.5	21.9

Applications:

Can be used in some specific applications. Reliability and durability, High mechanical strength, Corrosion & Explosion resistant.
Saulty, acid or arrosion applications like passageway, ship, harbor, underground parking or beach projects
Industry, garages, gas station & workshops.







AFTER-SALE SERVICE

LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX provides free repair or replacement within warranty period.LONGLUX shall charge against defeats by abnormal storage,usage,connect on or change the structure or any components of the product.

*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

ADD:
Hangzhou Longlux Electronic Technology Co. Ltd
TEL:+8613656681084
E-mail: william@longlux.com
Http: www.longlux.com